


# EDZ 960



2-16 poles, Spacing 7.62 mm  
insert required no. of poles \*\*  
How to order see page 6

## Ratings:

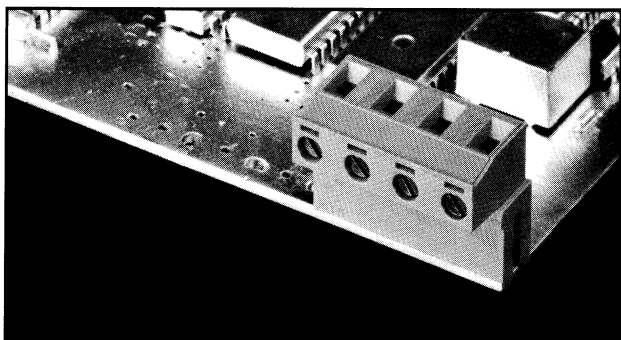

UL1059



CSA 22.2 No. 158



DIN VDE 0627

|                         | 250 VB    | 300 VB    | 400V                |
|-------------------------|-----------|-----------|---------------------|
| Rated Voltage           | 250 VB    | 300 VB    | 400V                |
| Rated Current           | 15 A      | 16 A      | 12 A (T60)          |
| Wire Size               | AWG 22-12 | AWG 28-12 | 2.5 mm <sup>2</sup> |
| Test Voltage            |           |           | 3.31 kV             |
| Rated Torque/Screw Size |           |           | 0.5 Nm/M3           |

## Rated Cross Section

|                             |                     |
|-----------------------------|---------------------|
| Single Wire (solid)         | 2.5 mm <sup>2</sup> |
| Stranded Wire (flexible)    | 2.5 mm <sup>2</sup> |
| Stranded wire with Ferrules | 2.5 mm <sup>2</sup> |

## Dimensions

|                 |         |
|-----------------|---------|
| Spacing         | 7.62 mm |
| Stripped Length | 6.0 mm  |

## Materials

|                     |              |
|---------------------|--------------|
| Insulating Material | PA           |
| Flammability Class  | UL94 V-0     |
| Temperature Range   | -30°C/+105°C |
| Terminal Block      | CuZn         |
| Contact             | CuSn         |
| Color               | Green        |

