





EDSTLZ 960

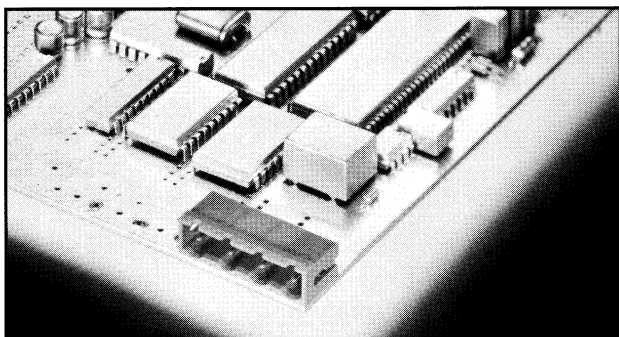

2-16 poles, Spacing 7.62 mm
insert required no. of poles **
How to order see page 6

Ratings:

| |  UL1059 |  CSA 22.2 No. 158 |  DIN VDE 0627 |
|---------------|--|--|--|
| Rated Voltage | 250 VB | 300 VB | 400 V |
| Rated Current | 15 A | 16 A | 12 A (T60) |
| Test Voltage | | | 3.31 kV |

Dimensions

| | |
|-------------------|---------|
| Spacing | 7.62 mm |
| PCB Hole Diameter | 1.4 mm |

Materials

| | |
|---------------------|--------------|
| Insulating Material | PA |
| Flammability Class | UL94 V-0 |
| Temperature Range | -30°C/+105°C |
| Contact Pin | Cu |
| Color | Green |

