


# EDSTLZ 970



Spacing 5.08 mm  
insert required no. of poles \*\*  
How to order see page 6

## Ratings:

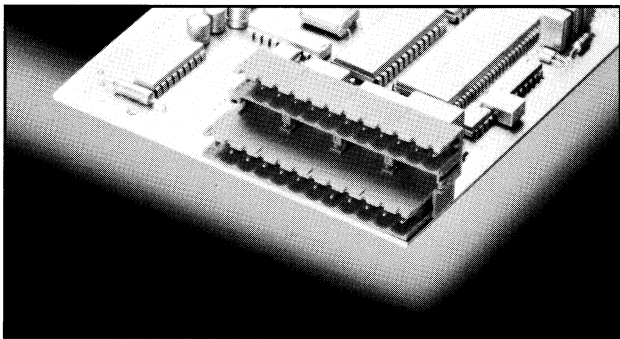

UL1059



CSA 22.2 No. 158



DIN VDE 0627

Rated Voltage

250 VB

300 VB

250 V

Rated Current

15 A

16 A

12 A (T60)

Test Voltage

2.21 kV

## Dimensions

Spacing

5.08 mm

PCB Hole Diameter

1.4 mm

## Materials

Insulating Material

PA

Flammability Class

UL94 V-0

Temperature Range

-30°C/+105°C

Contact Pin

Cu

Color

Green

