





EDSTLZ 1550

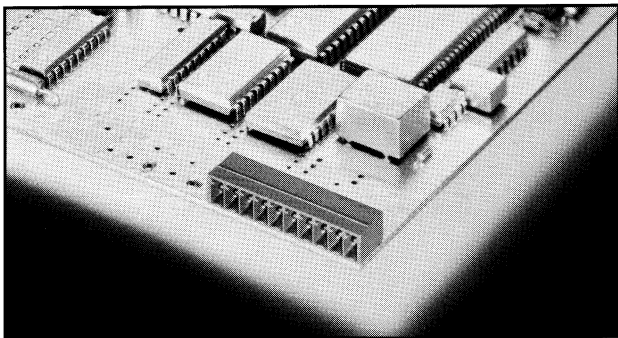

2-16 poles, Spacing 3.81 mm
insert required no. of poles **
How to order see page 6

Ratings:

*Approvals pending

| |  * |  * |  * |
|----------------------|---|---|---|
| | UL1059 | CSA 22.2 No. 158 | DIN VDE 0627 |
| Rated Voltage | 125 VB | 150 VB | 125 V |
| Rated Current | 8 A | 8 A | 8 A (T60) |
| Test Voltage | | | 1.39 kV |

Dimensions

| | |
|-------------------|---------|
| Spacing | 3.81 mm |
| PCB Hole Diameter | 1.2 mm |

Materials

| | |
|---------------------|--------------|
| Insulating Material | PA |
| Flammability Class | UL94 V-0 |
| Temperature Range | -30°C/+105°C |
| Contact Pin | Cu |
| Color | Green |

