


EDZ 841

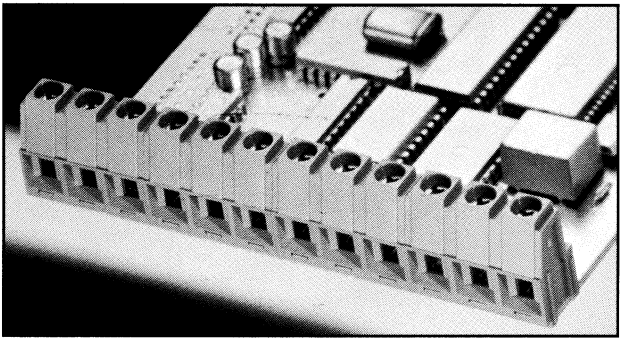

Spacing 9.52 mm
insert required no. of poles **
How to order see page 6

Ratings:

* Approvals pending



UL1059



CSA 22.2 No. 158



EN 60998

Rated Voltage	250 VB	300 VB	760 V
Rated Current	30 A	30 A	41 A (T60)
Wire Size	AWG 28-10	AWG 28-10	6.0 mm²
Test Voltage			3.5 kV
Rated Torque/Screw Size			0.8 Nm/M3

Rated Cross Section

Single Wire (solid)	6.0 mm²
Stranded Wire (flexible)	4.0 mm²
Stranded wire with Ferrules	4.0 mm²

Dimensions

Spacing	9.52 mm
PCB Hole Diameter	1.3 mm
Stripped Length	8.0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Wire Guard	Cu
Color	Green

