


Ratings:
 Current 15A
 Voltage 300 V
 Wire Size 22-14AWG
 Test Voltage 2.0 kV
 Rated Torque / Screw Size 0.4Nm / M2.6

Rated Cross Section:
 Single Wire (solid) 1.5mm²
 Stranded Wire (flexible) 1.0mm²
 Stranded Wire with Ferrules .75mm²

Dimensions:
 Spacing 5.0mm
 PCB Hole Diameter 1.3mm
 Stripped Length 6.0mm

Materials:
 Insulating Material PA
 Flammability UL94V-0
 Temperature -30°C/+105°C
 Block CuZn
 Wire Guard CuSn
 Color Dark Gray

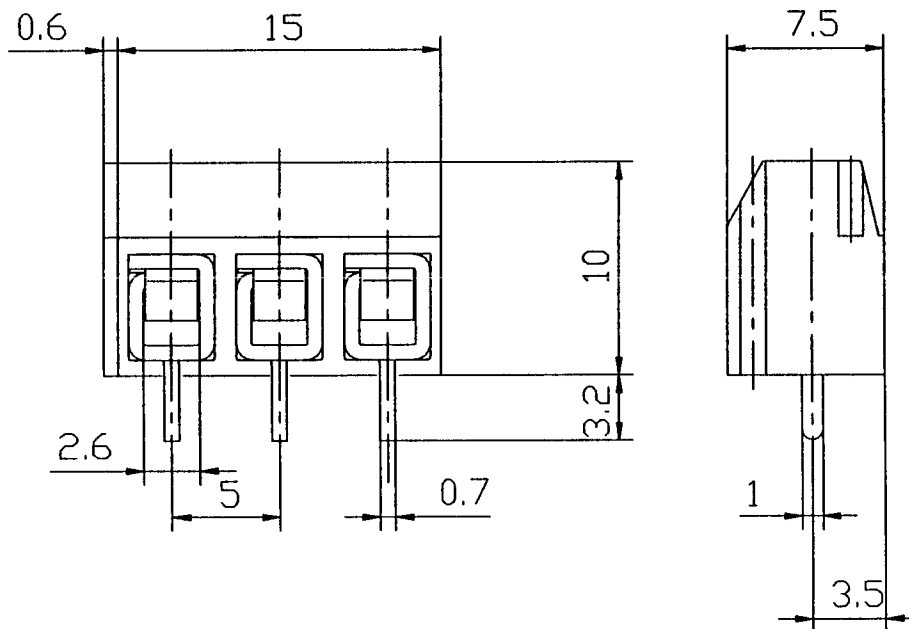

Part Number
ED502/[*][*]DS
 * - NUMBER OF POSITIONS

Units
 mm

Drawing

Reviewed

Approved

Date
 3/26/99

Sheet 1 of 1

Rev. A