
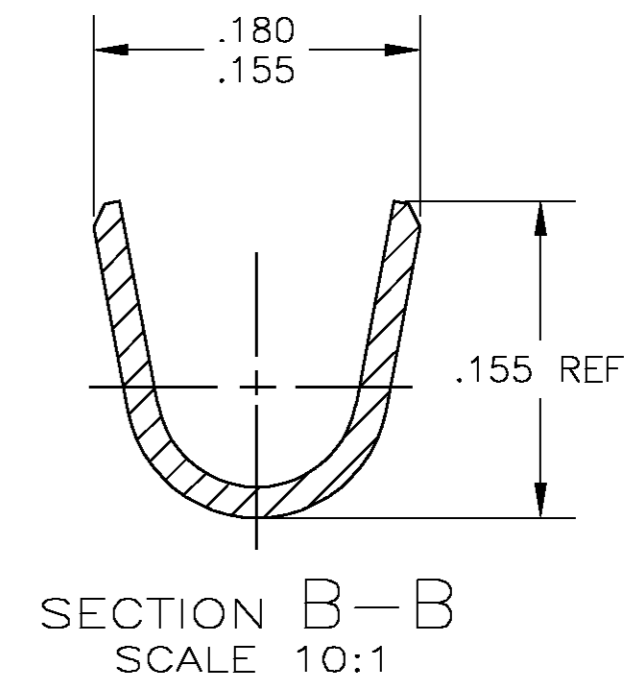
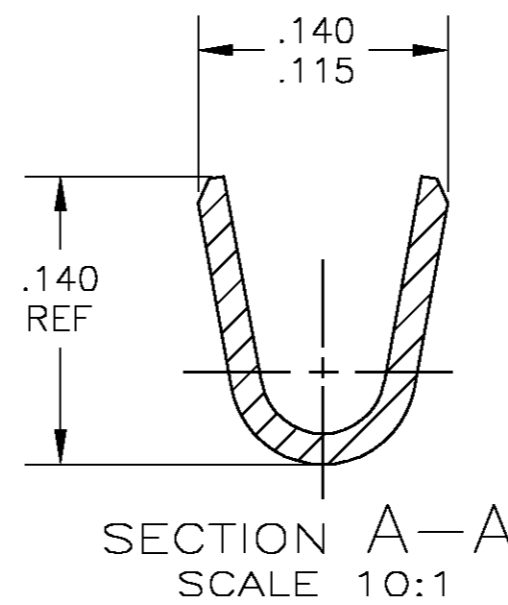
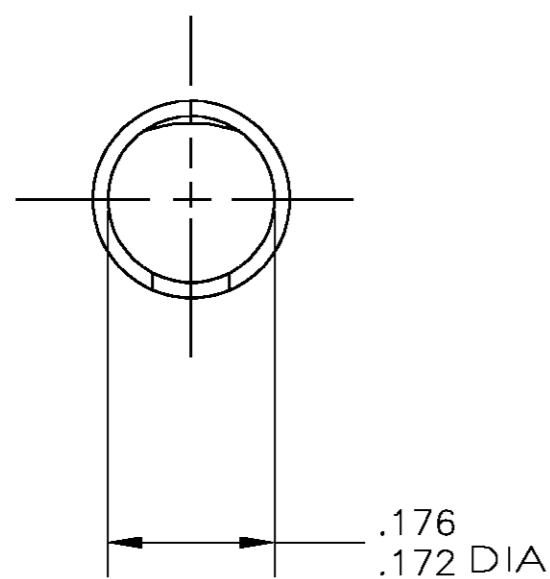
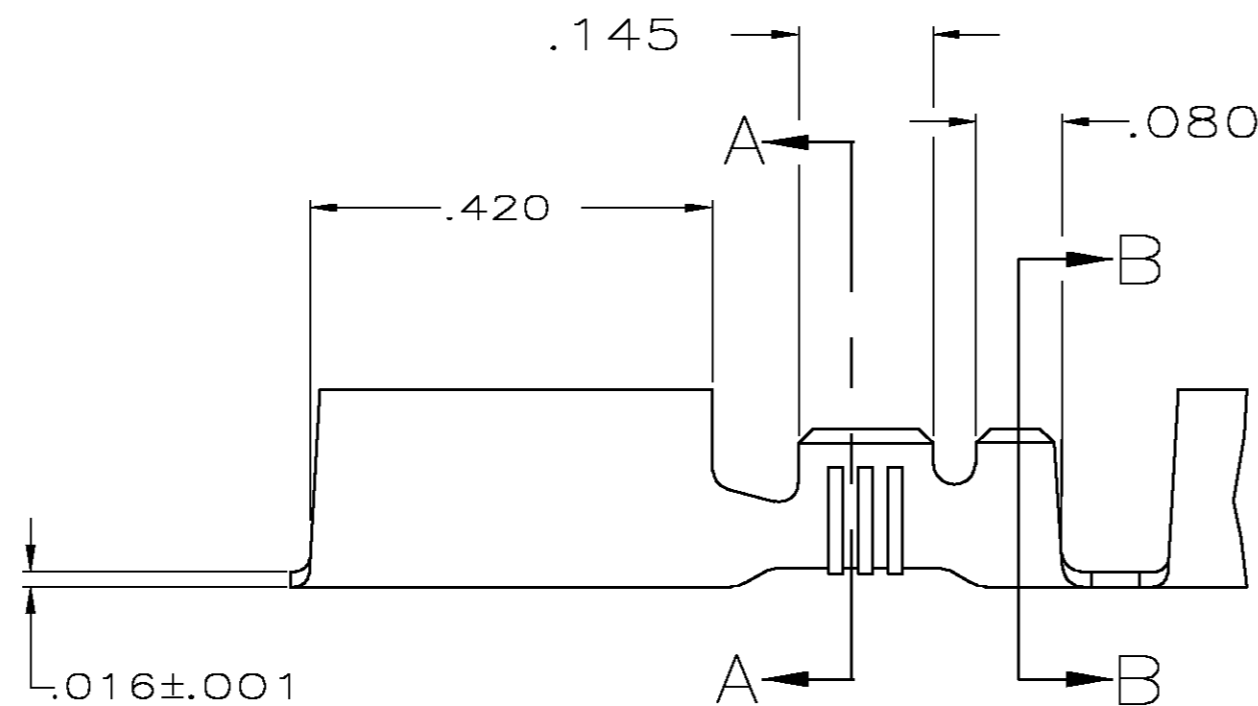


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AF	50	P	LTR	DESCRIPTION	DATE	DWN	APVD
		S		REV PER 063A-0608-04	04AUG04	JR	DD

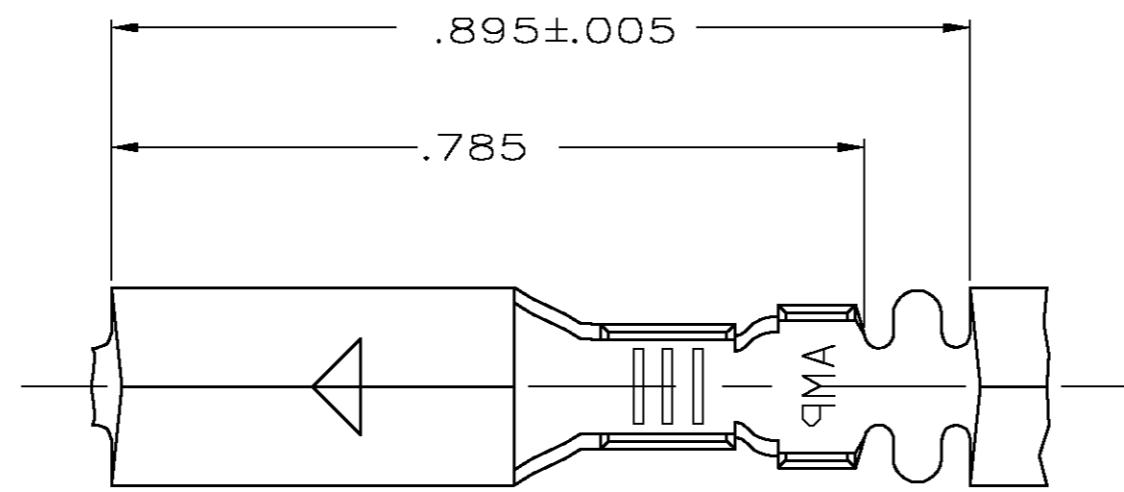

- 1 CONTINUOUS STRIP ON REELS
- △2 TIN PL .000080 MIN PER MIL-T-10727
- △3 .000080 MIN TIN PLATE PER MIL-T-10727 OVER .000050 MIN NICKEL UNDERPLATE PER QQ-N-290.
- △4 .000030 MIN GOLD PLATE OVER .000050 MIN NICKEL UNDERPLATE PER QQ-N-290.
- △5 .000200 MIN SILVER OVER .000050 MIN NICKEL UNDERPLATE PER QQ-N-290
- 6 WIRE SIZE IS #18-#14 AWG
- 7 INSULATION RANGE IS .090-.125 DIA
- △8 PREPRODUCTION - FASR REQ
- △9 PRELIMINARY - NOT FOR PRODUCTION

F OR O	.140	.210	F	.100	.077	14
					.067	16
					.061	18
TYPE	WIDTH	STRIP LENGTH ±.015	TYPE	WIDTH	±.002 HEIGHT	WIRE
INSUL BARREL CRIMP			WIRE BARREL CRIMP			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	P FORTNEY	12/13/88	 Tyco Electronics Corporation Harrisburg, Pa 17105-3608			
CHK	MS FEHER	6/14/89				
APVD	D DECKER	6/14/89				
PRODUCT SPEC						
APPLICATION SPEC			NAME			
			RECEPTACLE, SHUR PLUG,.180 DIA			
MATERIAL	#4 HARD BRASS	SEE TABLE	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
			A2	00779	C=60798	-
			CUSTOMER DRAWING	SCALE	5:1	SHEET 1 OF 1
						REV S

60798

A