

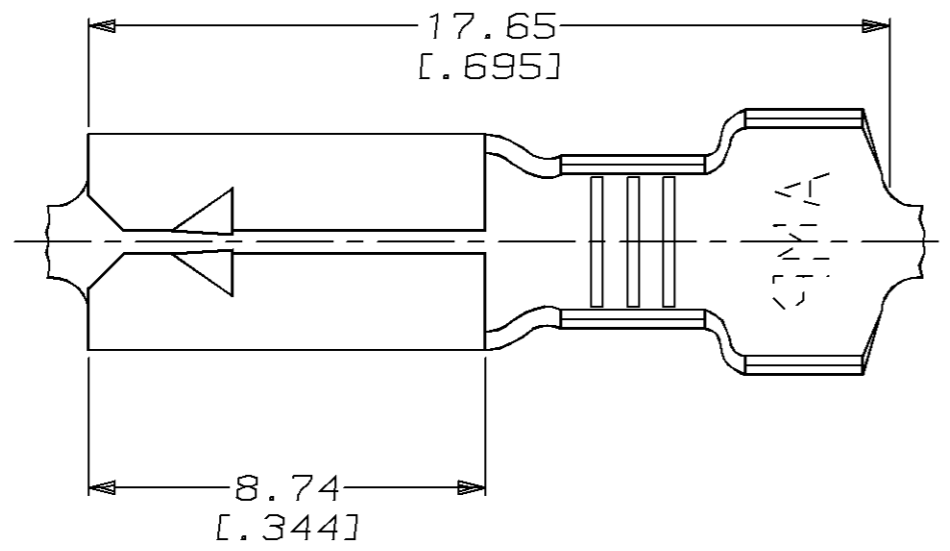
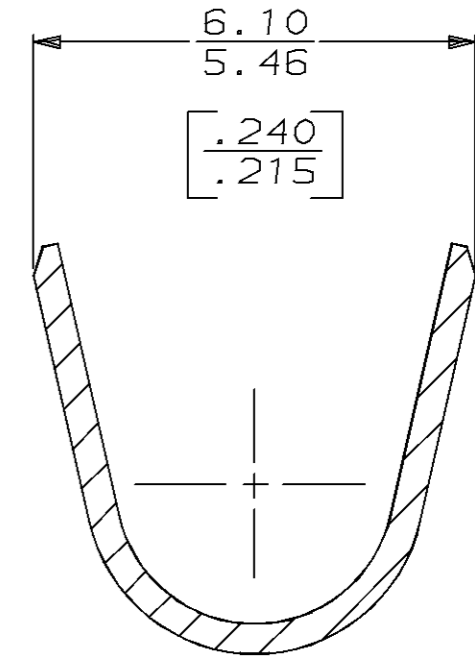


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS				
				ZONE	LTR	DESCRIPTION	DATE	APPD
AF	50				K	REDRAW & ADD -4 PER 0710-0365-95	29/AUG/95	PF/GY

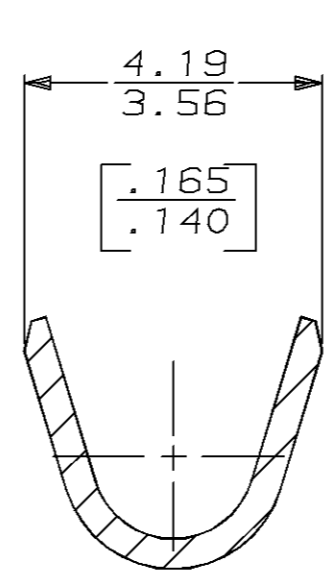

- 1 CONTINUOUS STRIP ON REEL.
- 2 0.002032 [.000080] MIN TIN PL PER MIL-T-10727.
- 3 0.00508 [.000200] MIN SILVER PL OVER 0.00254 [.000100] MIN COPPER UNDEPLATE OR 0.00127 0.00127 [.000050] MIN NICKEL UNDEPLATE.

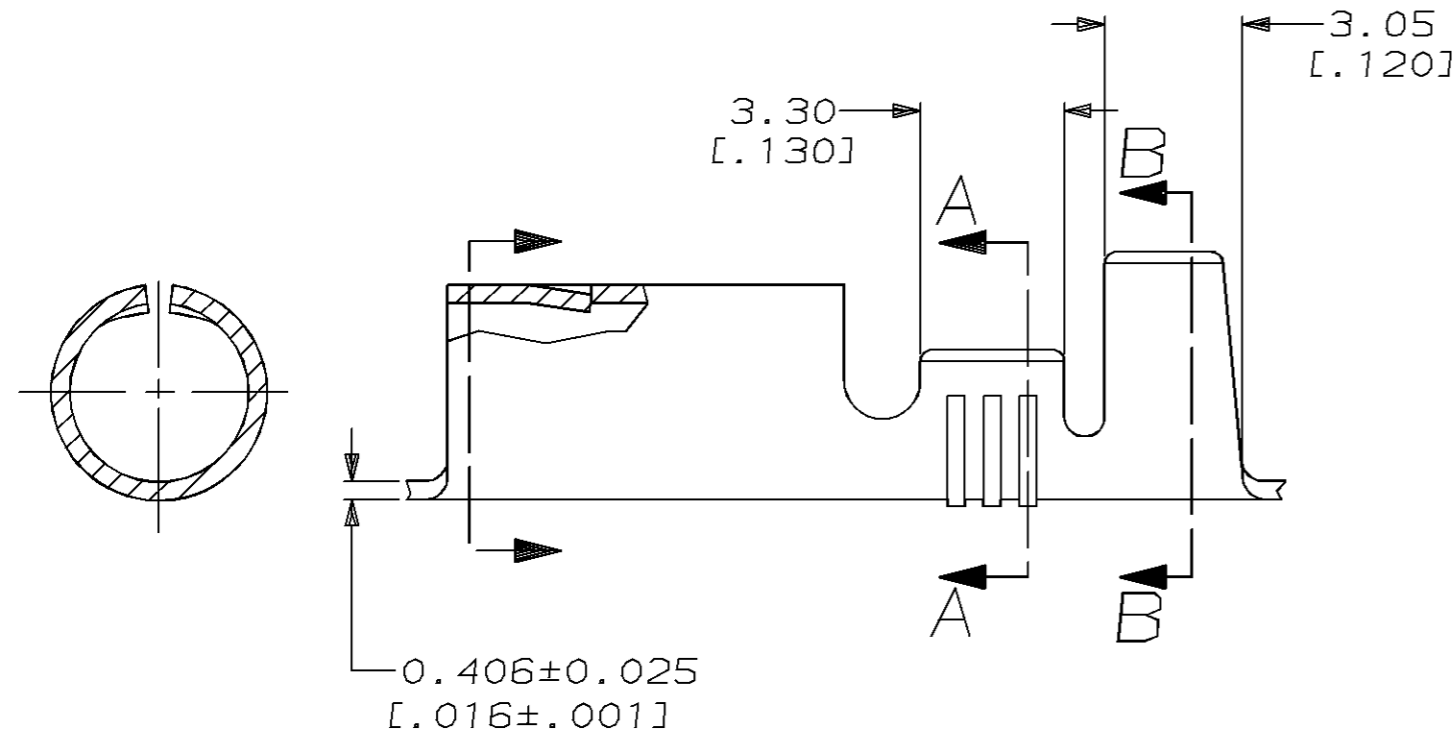

SECTION A-A
SCALE 10:1

SECTION B-B
SCALE 10:1

3	3.30-4.44 DIA	[18-14] AWG	42142-4
	[.130-.175]		42142-2
2			42142-1
FINISH	INSULATION RANGE	WIRE RANGE	PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.25 [.010] 3 PLC DEC ± - ANGLES ± -	DR 29/AUG/95 PHILLIP M FORTNEY	AMP AMP Incorporated Harrisburg, PA 17105-3608
	CHK 29/AUG/95 JEFF R RUTH	
	APPD 29/AUG/95 GARY YETTER	
	APPD 29/AUG/95 MARK BARNABA	
MATERIAL 4M BRASS	PRODUCT SPEC -	NAME RECEPTACLE, SHUR PLUG, 3.96 [.156] DIA
FINISH SEE TABLE	APPLICATION SPEC -	SIZE B
	WEIGHT -	CAGE CODE 00779
		DRAWING NO C=42142
		SCALE 6:1
		SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.