


断面 "A" - "A"  
SECT.

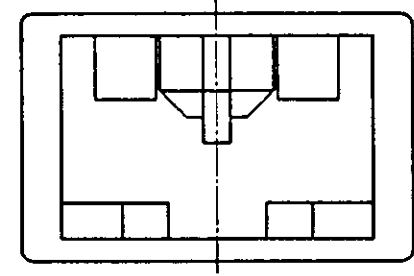

注記:

1. 適用製品規格 : 108-5437
2. 適用コンタクト型番 : 179973-□ , 179974-□ , 179975-□
4. 取扱説明書 : 411-5691

NOTES:

1. PRODUCT SPEC, 108-5437
2. APPLICABLE CONTACT P/N 179973-□ , 179974-□ , 179975-□
3. INSTRUCTION SHEET, 411-5691

黒	( BLACK )	179970-9
青	( BLUE )	179970-6
黄	( YELLOW )	179970-4
赤	( RED )	179970-2
自然色	( NATURAL )	179970-1
色調 (COLOR)		型番 (P/N)

Copyright ©1994年 日本エー・エム・ピー株式会社		Copyright ©1994 AMP (Japan), LTD. ALL RIGHTS RESERVED.		<b>AMP</b>		日本エー・エム・ピー株式会社 Tokyo, Japan	
規格 (WIRE RANGE)		絶縁外径 (INSULATION DIA.)		名称 (NAME)			
6/6ナイロン 6/6NYLON(UL94V-0)		4.3 MAX mmφ		"250" SERIES POSITIVE LOCK-EX-II 1Pos REC HSG "250"シリーズ・ポジティブロック-EX-II 1極リセ・ハウジング			
材料 (MATERIAL)		仕上 (FINISH)		一般公差 (GENERAL TOLERANCE)		LOC 番号 (No.)	
DR. N. NAGASHIMA		M. SUZUKI		10mm以下: ±0.2 10mm以上30mm以下: ±0.25 30mm以上100mm以下: ±0.3 角度: ±3°		B J 179970	
CHK. M. SHINDO		APP. Y. KASHIWA		尺度 (SCALE)		REV. SHEET	
5:1		A		1 OF 1			

NUMBER  
179970

METRIC  
三角法 (3rd ANGLE PROJECTION)

PRINT DIST  
単位: 概 DIMENSIONS IN MM. DO NOT SCALE PRINT