


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	M	REVISED PER ECR-06-010412	03NOV06	HMR KR



- CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 8.38 [.330] CENTERS.
- SLOT TERMINATES EITHER SINGLE OR DOUBLE MAGNET WIRES OF THE SAME TYPE AND SIZE, COPPER RANGE IS 0.36-0.57mm [#27-#23] AWG.
- AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

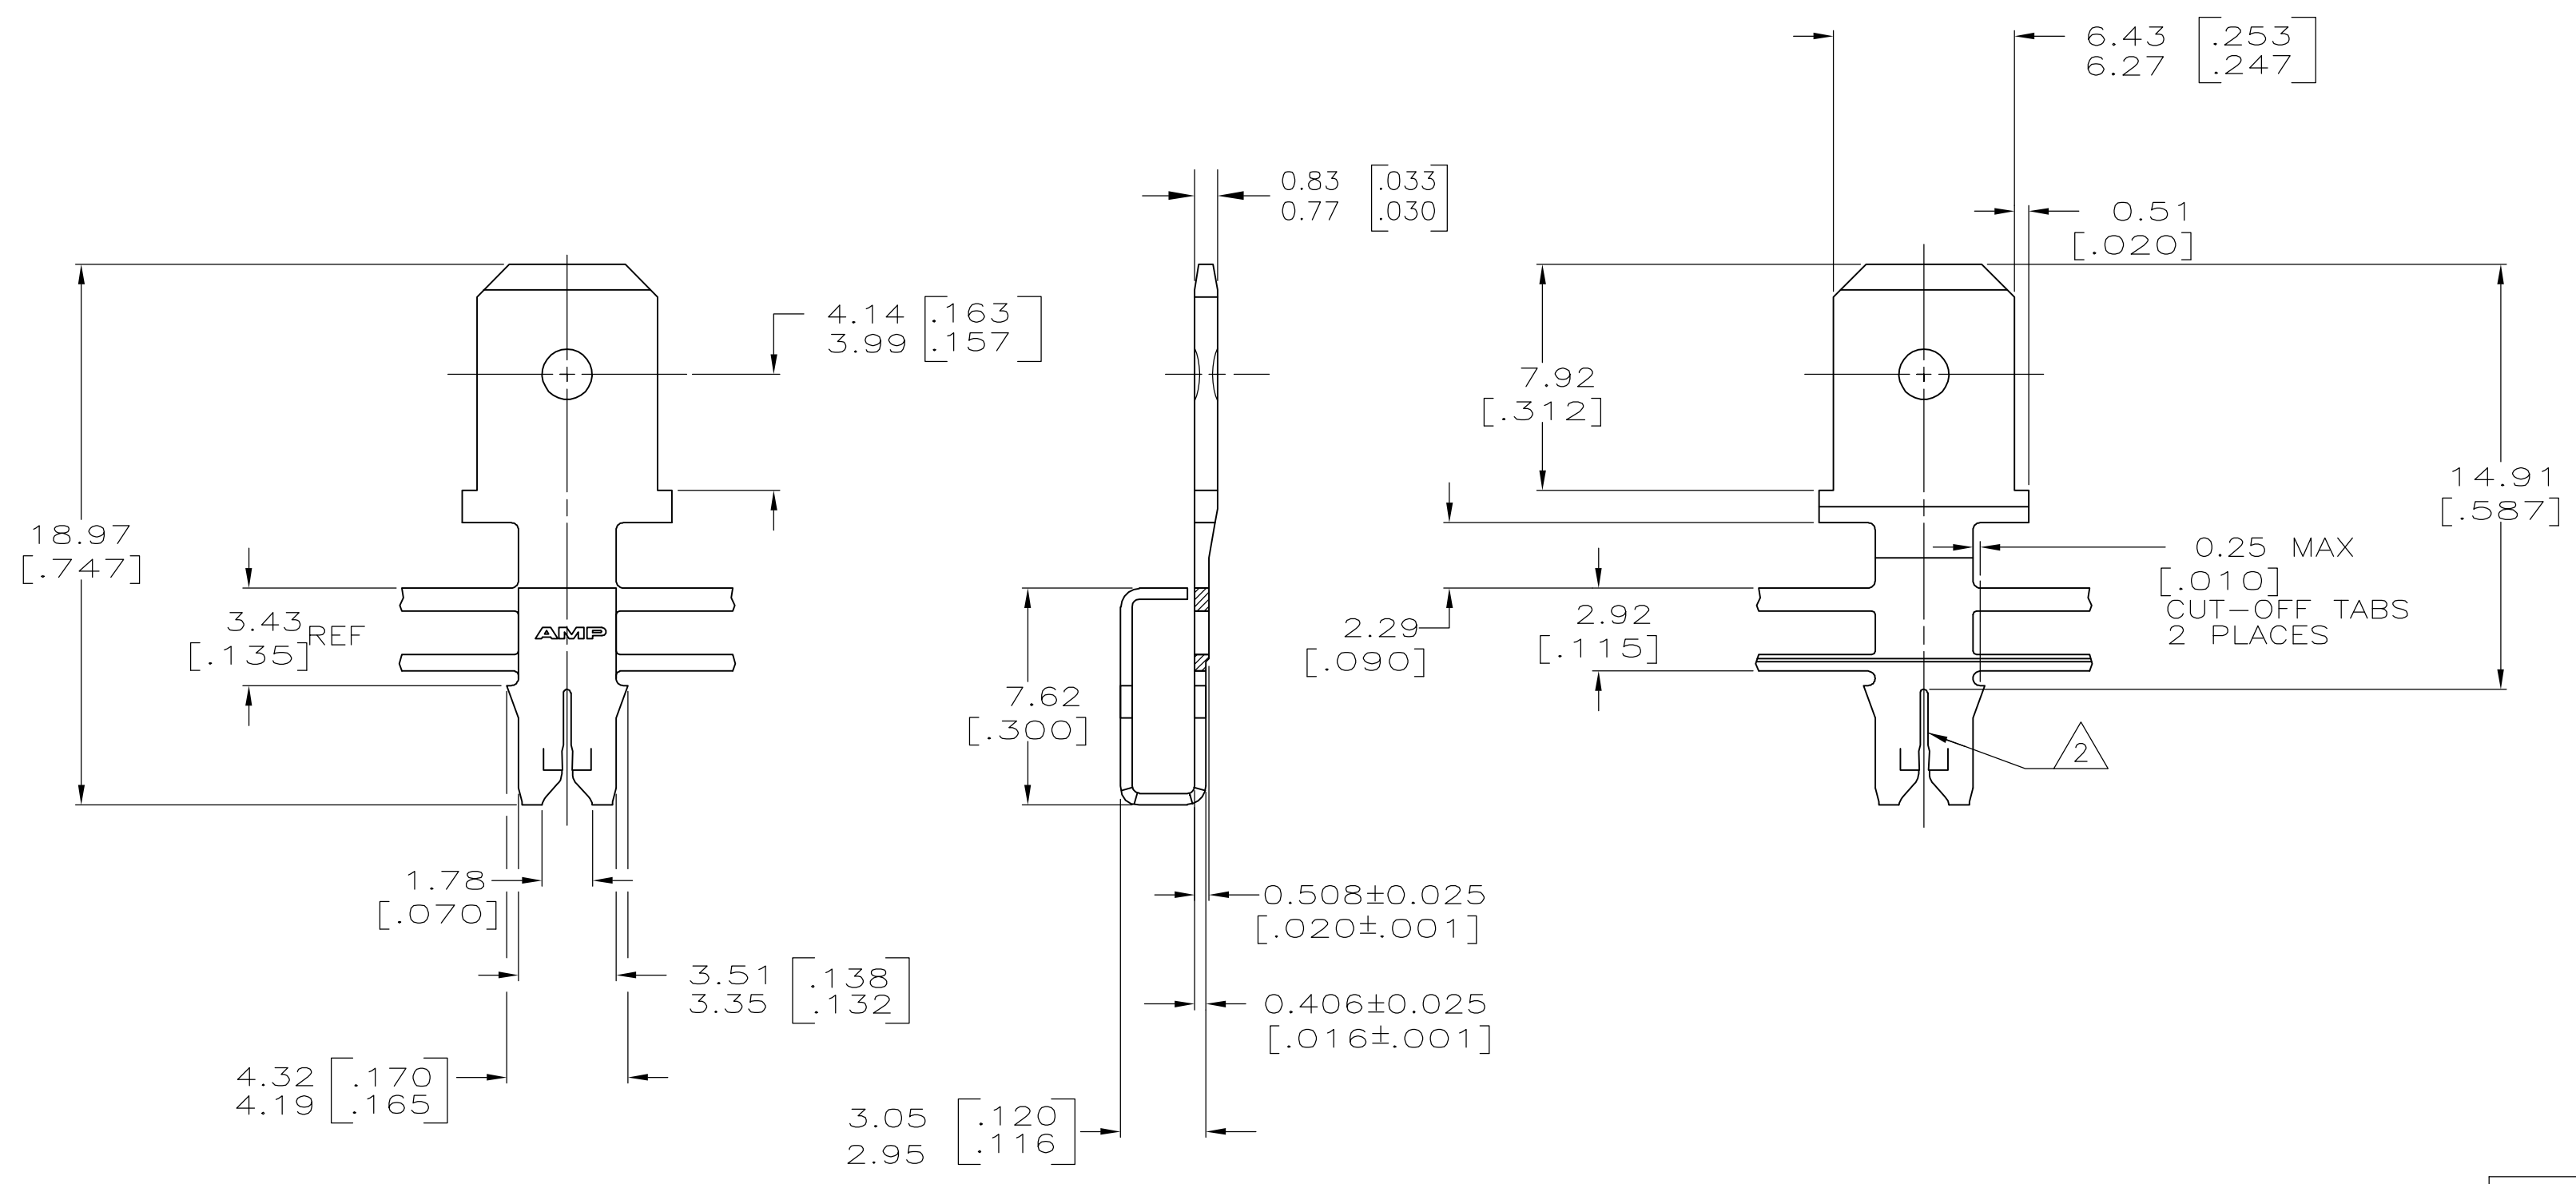

BOX DOWN TAB BACK	62652-2
BOX DOWN TAB FOWARD	62652-1
REELING, LEFT TO RIGHT	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	MICHAEL S. FEHER	1/3/91	 Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: mm [INCHES]		CHK	JEFF R. RUTH	1/14/91	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NELSON E. NEFF	1/14/91	NAME
0 PLC ± -	1 PLC ± -	PRODUCT SPEC		TAB, 6.35 [.250] FASTON™, MAG-MATE™	
2 PLC ± 0.25 [.010]	3 PLC ± -	APPLICATION SPEC		SIZE	CAGE CODE
4 PLC ± -	ANGLES ± -	114-2046		DRAWING NO	RESTRICTED TO
MATERIAL #2 HARD PRE-MILLED BRASS	FINISH 0.002037 [.000080] MIN TIN PER MIL-T-10727	WEIGHT	-	A2	00779
CUSTOMER DRAWING		SCALE	5:1	SHEET	1 of 1
		REV	M		