

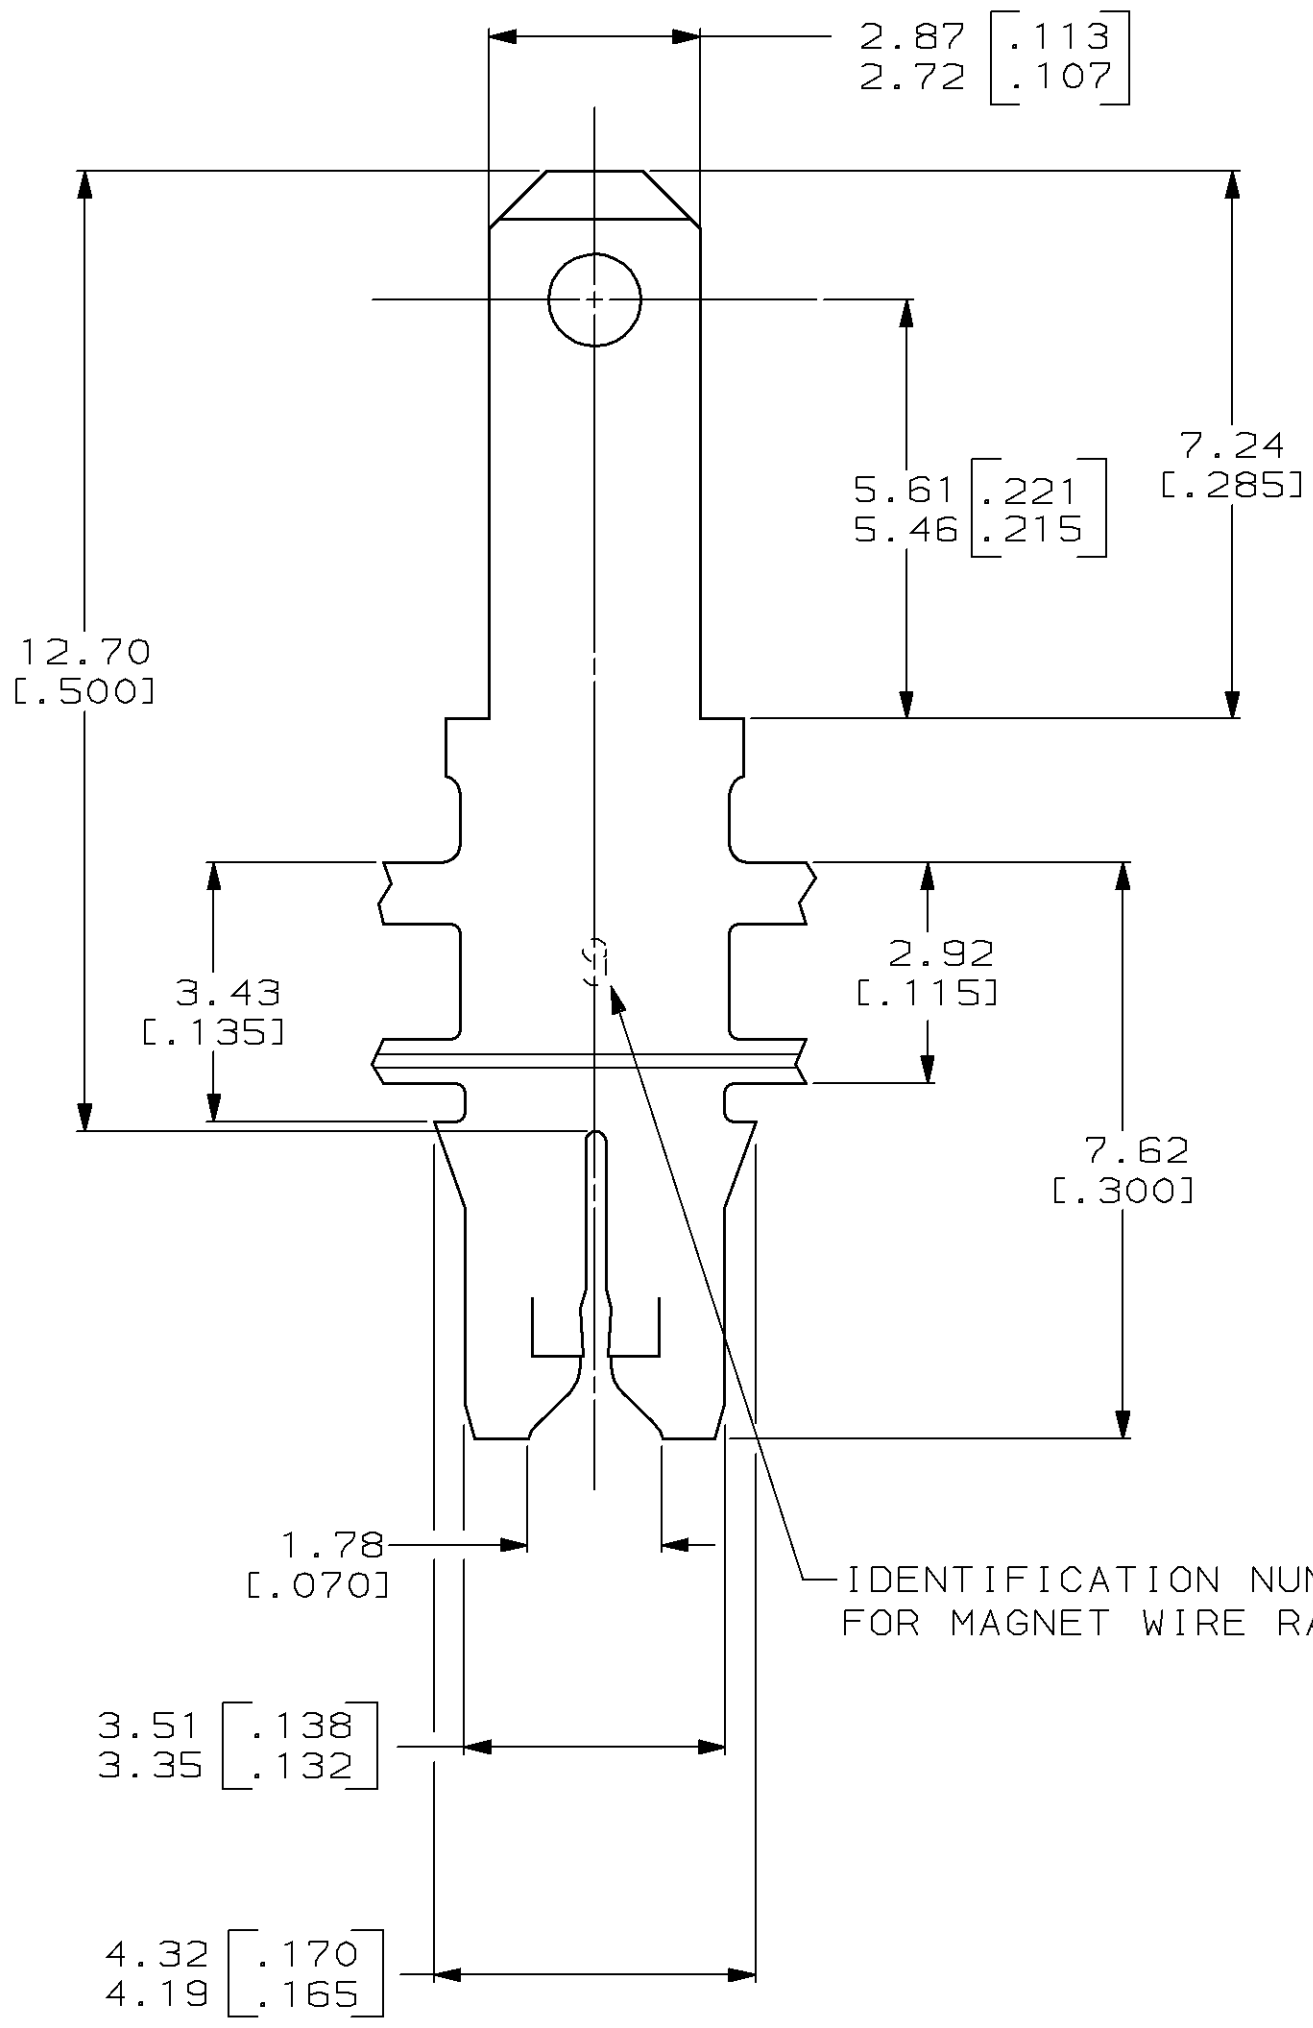
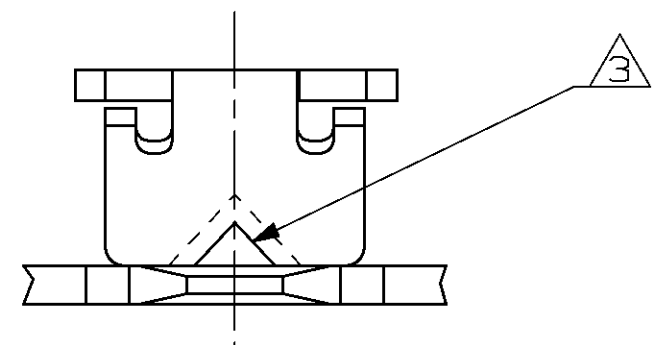


LOC		DIST		REVISIONS			
ZONE	LTR	DESCRIPTION	DATE	APPD			
AF	50						
		J	12JAN99	MF/KR			
		REVISE PLATEING 061A-0467-98					

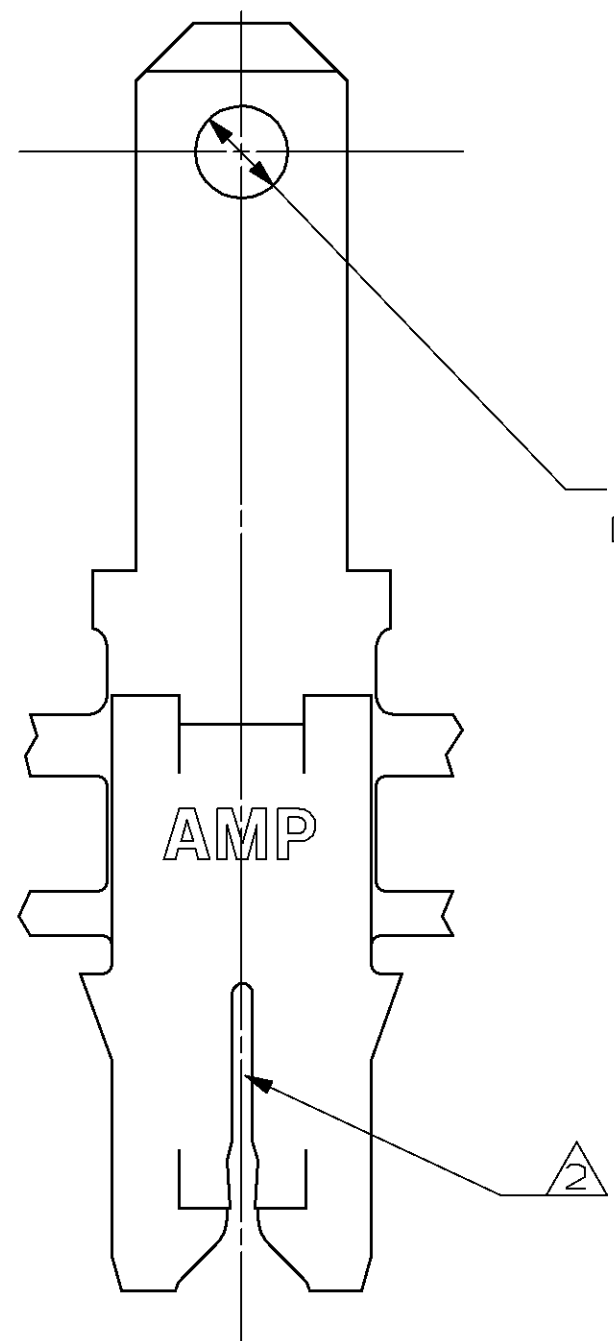

IDENTIFICATION NUMBER 9 FOR MAGNET WIRE RANGE

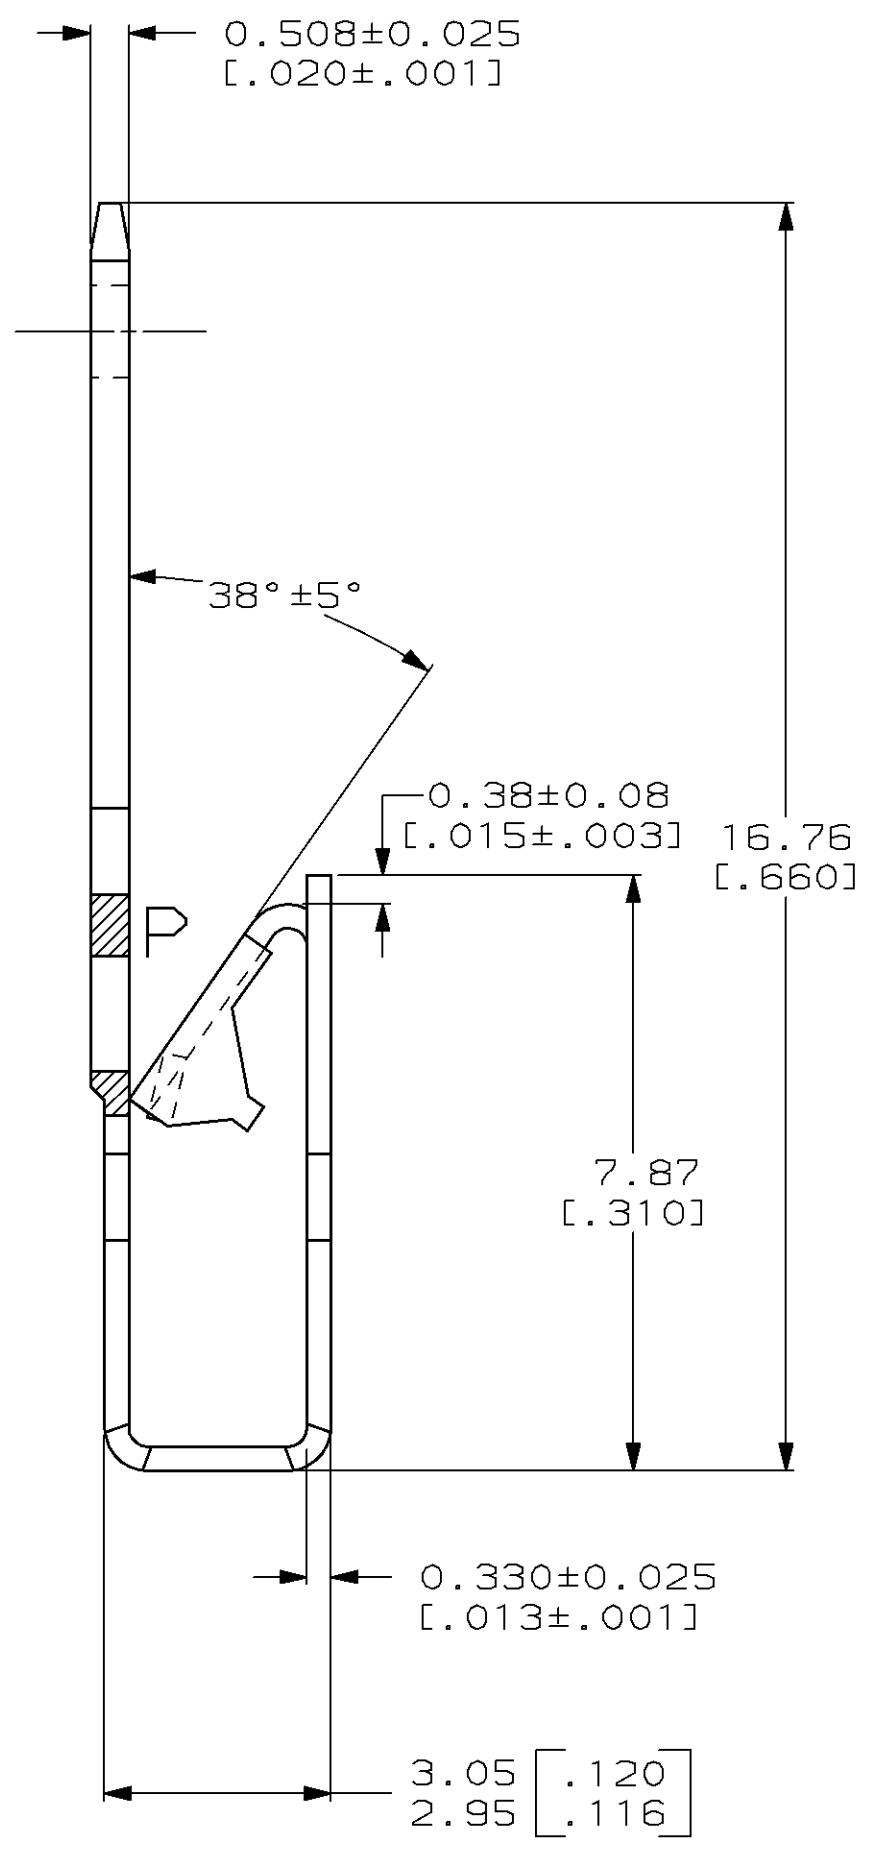

- 1 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 5.59±0.08 [.220±.003] CENTERS.
- 2 SLOTS ACCEPTS EITHER A SINGLE OR DOUBLE MAGNET WIRE OF THE SAME SIZE AND TYPE
COPPER RANGE: 0.32-0.51mm [#28-#24] AWG
- 3 POKE-IN ACCEPTS A 0.5-0.8mm² [#20-#18] AWG SOLID OR FUSED STRANDED LEAD WIRE.
- 4 AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

63062-1

PART NO

AMP AMP Incorporated
Harrisburg, PA 17105-3608

NAME
 TERMINAL, TAB,
 POKE-IN / 2.79 [.110] FASTON™,
 COMBINATION, MAG-MATE™

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.25 [.010] 3 PLC DEC ± - ANGLES ± -	DR 9/MAR/95 R.GRZYBOWSKI
MATERIAL 4M PRE-MILLED BRASS	CHK 16/MAR/95 M.S.FEHER
FINISH 0.002032 [.000080] MIN TIN PLATE	APPD 16/MAR/95 NELSON E. NEFF
	APPD 16/MAR/95 TERRY L. SHUTTER
	PRODUCT SPEC 108-2012
	APPLICATION SPEC 114-2046
	WEIGHT -

SIZE C	CAGE CODE 00779	DRAWING NO G=63062
SCALE 10:1	SHEET 1 OF 1	

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.