

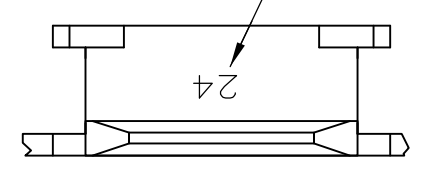
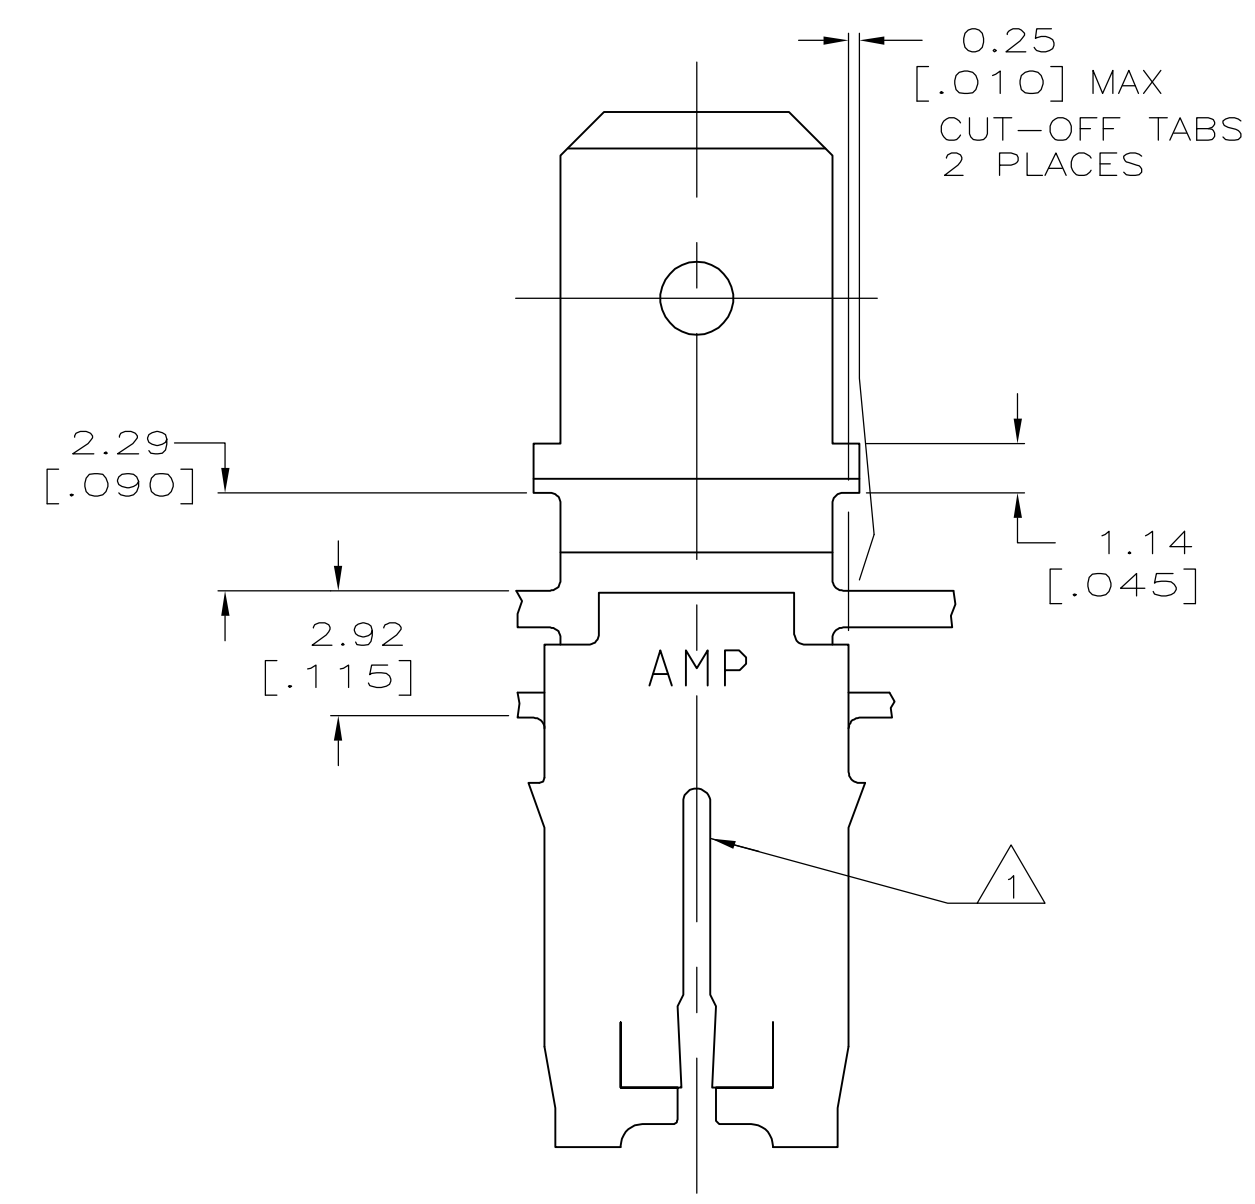


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50				
	K	REVISED PER ECR-06-010427	01SEP06	HMR	KR

IDENTIFICATION NUMBER 24 FOR MAGNET WIRE RANGE

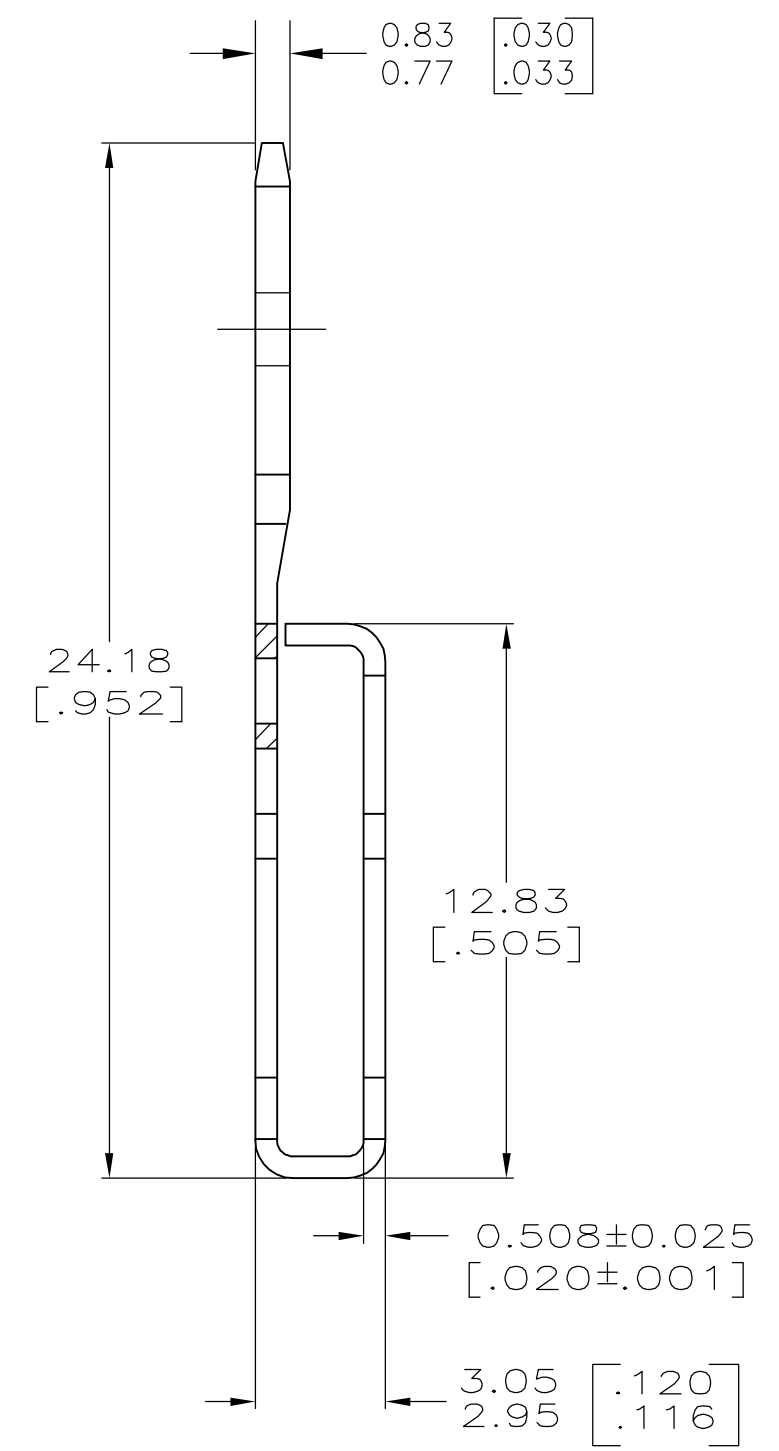

- 1 SLOT ACCEPTS 0.91-1.15mm [#19-#17] AWG COPPER MAGNET WIRE. 2 WIRES OF THE SAME SIZE MAX PER SLOT.
- 2 AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.
- 3 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 8.38±0.08 [.330±.003] CENTERS.
- 4 VARNISH RESIST OVER 0.002032 [.000080] MIN TIN PER MIL-T-10727

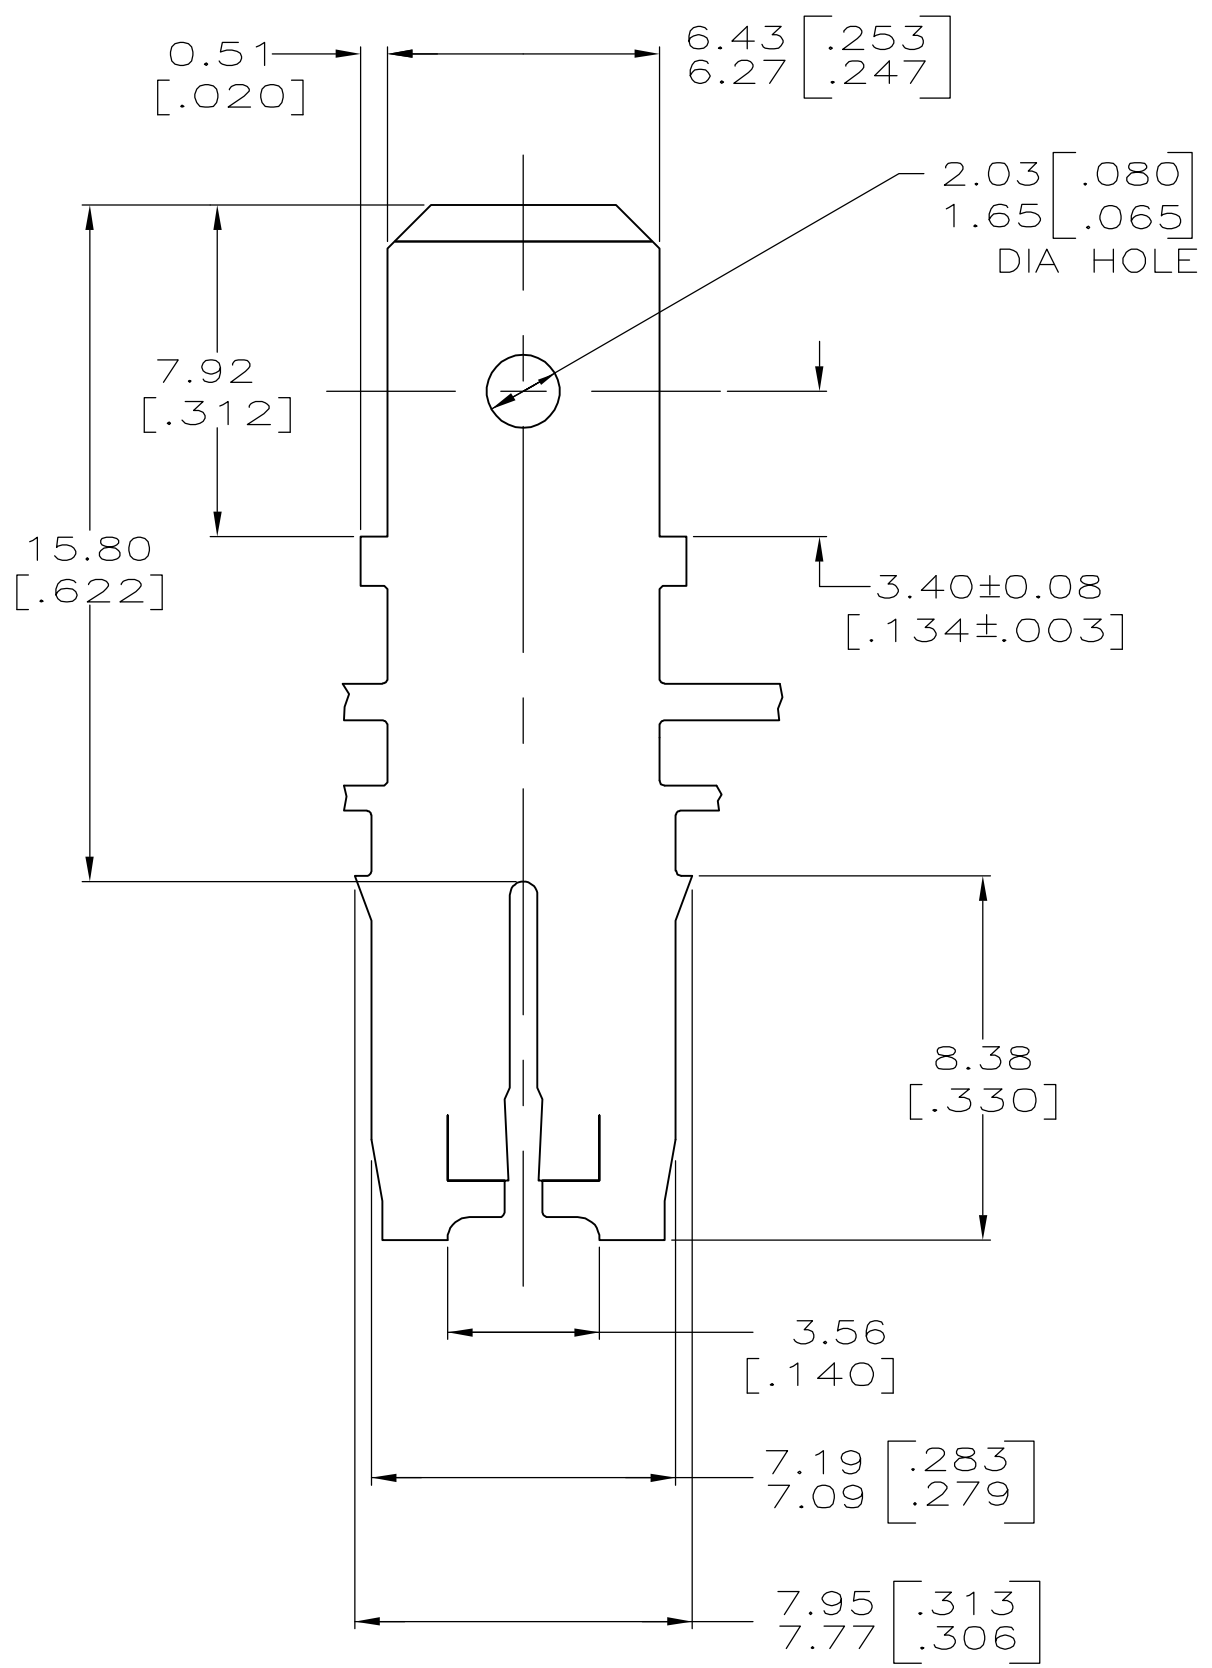

OBSOLETE	SPECIAL	4	63464-4
	STANDARD	4	63464-3
			PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 24/OCT/94 PHILLIP M. FORTNEY		Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK 25/OCT/94 MICHAEL S. FEHER		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 25/OCT/94 NELSON E. NEFF	PRODUCT SPEC		
0 PLC ± -		108-2053			
1 PLC ± -		APPLICATION SPEC			
2 PLC ± 0.25 [.010]		114-2066			
3 PLC ± -		SIZE CAGE CODE DRAWING NO			
4 PLC ± -		RESTRICTED TO			
ANGLES ± -		A2 00779 G-63464			
MATERIAL	FINISH	WEIGHT	CUSTOMER DRAWING		
4M PRE-MILLED BRASS	SEE TABLE	-	SCALE 6:1	SHEET 1 of 1	REV K