

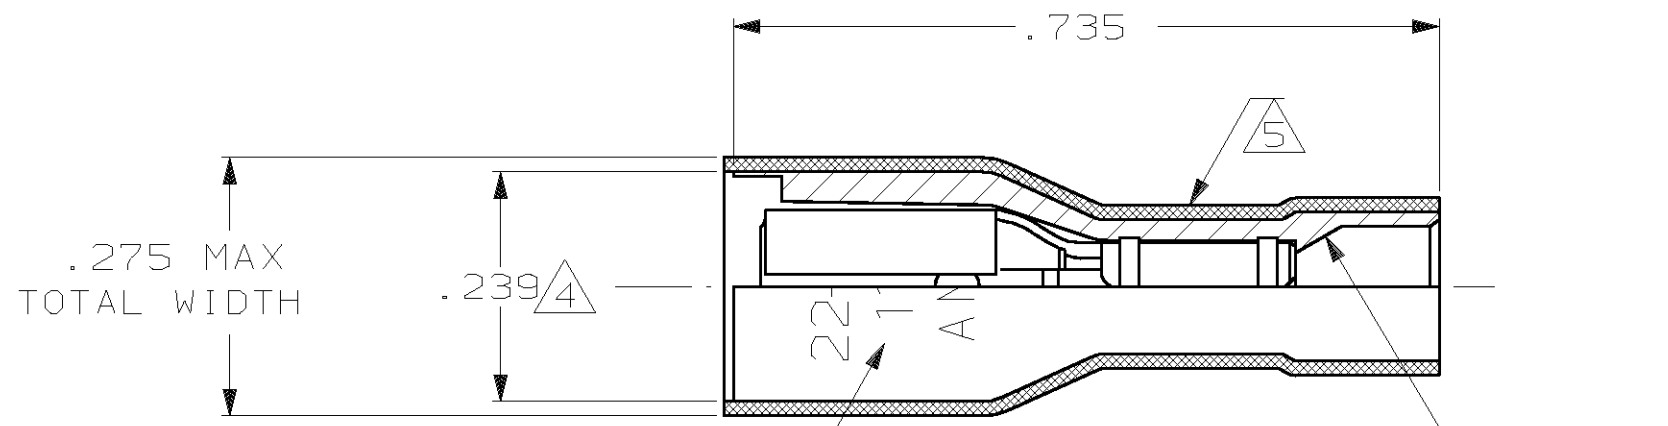



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC AF	DIST 50	P	F	REVISIONS			DATE	APPD
				ZONE	LTR	DESCRIPTION		
					M	REV PER 0G1A-0147-99	3JUN99	JR/JH

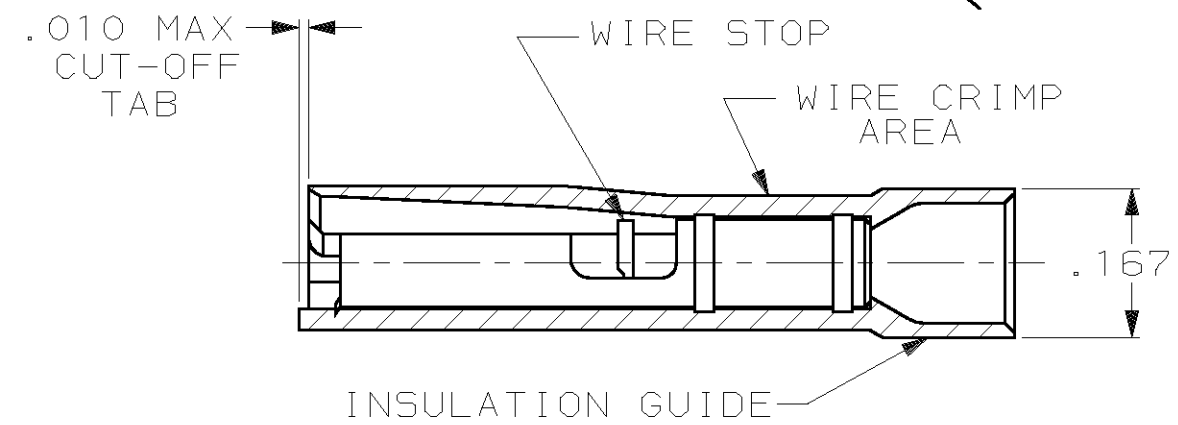

- 1 MATES WITH .016±.001X.110 OR .125 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .120 MAX DIA
- 4 DIMENSION DOES NOT INCLUDE TRIM BURR
- 5 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

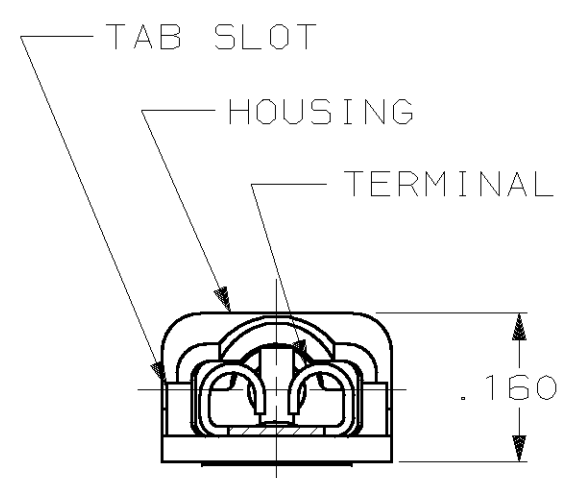

HOUSING: NYLON, COLOR-RED TRANSLUCENT	2-520081-2
RECEPTACLE: #3 HARD BRASS TIN PL .000080 MIN THK	

MATERIAL & FINISH		PART NO		
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± .015 ANGLES ± -	DR 11/9/88 P FORTNEY	AMP INCORPORATED Harrisburg, Pa. 17105		
	CHK 11/9/88 MS FEHER			
	MATERIAL	APPD 11/11/88 K RANDOLPH	NAME RECEPTACLE ASSY, ULTRA-FAST, LOOSE PIECE, .110/.125 SERIES, 22-18 AWG	
	SEE TABLE	APPD 11/11/88 TL SHUTTER		
FINISH	PRODUCT SPEC 108-2043	SIZE B	FSCM NO 00779	DRAWING NO 520081
SEE TABLE	APPLICATION SPEC 114-2123	SCALE 5:1	SHEET 1 OF 1	
	WEIGHT -			