


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC AF	DIST 50	P	F	REVISIONS			DATE	APPD
				ZONE	LTR	DESCRIPTION		
					N	REV PER 0G1A-0145-99	3JUN99	JR/JH

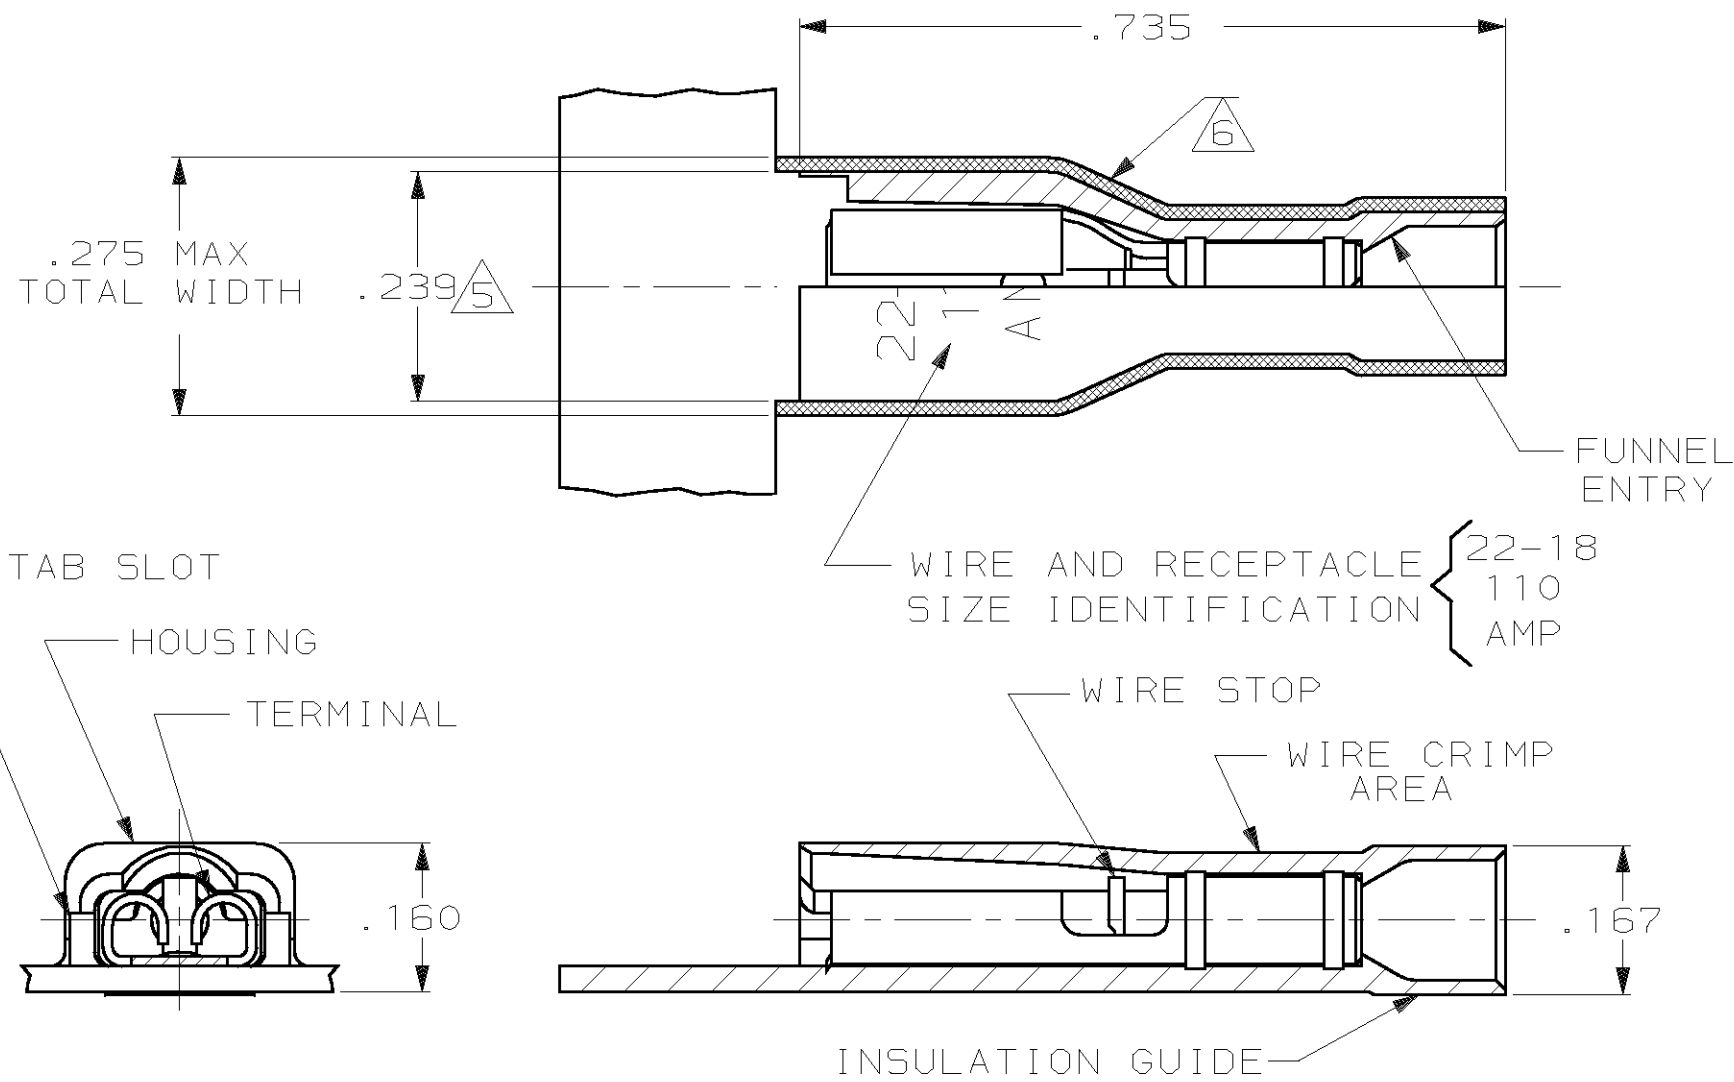

- 1 MATES WITH .016±.001X.110 OR .125 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .120 MAX DIA
- 4 CONTINUOUS STRIP ON REELS
- △5 DIMENSION DOES NOT INCLUDE TRIM BURR
- △6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

HOUSING: NYLON, COLOR-RED TRANSLUCENT		RECEPTACLE: #3 HARD BRASS		TIN PL .000080 MIN THK		2-520080-2	
MATERIAL & FINISH						PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± .015 ANGLES ± -		DR 11/8/88 P FORTNEY		CHK 11/8/88 MS FEHER		AMP INCORPORATED Harrisburg, Pa. 17105	
MATERIAL SEE TABLE		APPD 11/10/88 K RANDOLPH		APPD 11/10/88 TL SHUTTER		NAME RECEPTACLE ASSY, ULTRA-FAST, .110/.125 SERIES, 22-18AWG	
FINISH SEE TABLE		PRODUCT SPEC 108-2043		APPLICATION SPEC 114-2123		SIZE B	
WEIGHT -		SCALE 5:1		FSCM NO 00779		DRAWING NO 520080	
				SHEET		1 OF 1	