


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC AF DIST 50 P F

REVISIONS				DATE	APPD
ZONE	LTR	DESCRIPTION			
	L	REV PER 0G1A-0147-99	3JUN99	JR/JH	

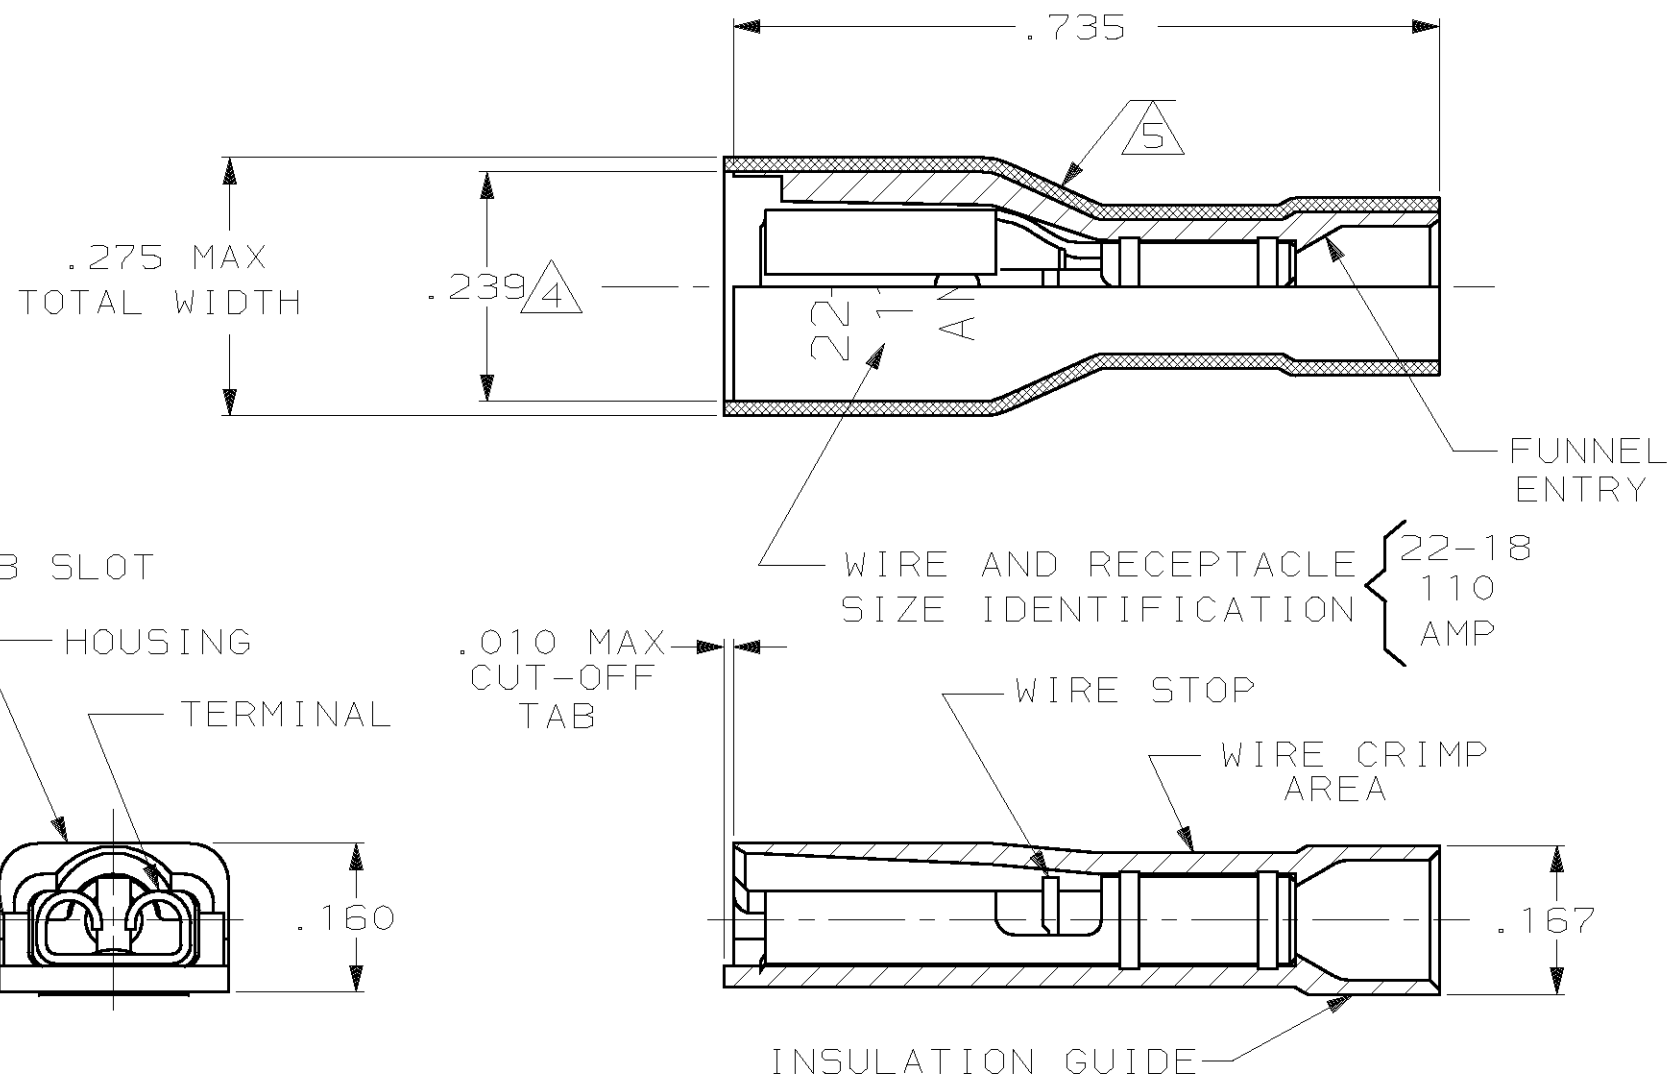

- 1 MATES WITH .032±.001X.110 OR .125 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .120 MAX DIA
- △4 DIMENSION DOES NOT INCLUDE TRIM BURR
- △5 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

HOUSING: NYLON, COLOR-RED TRANSLUCENT		RECEPTACLE: #3 HARD BRASS TIN PL .000080 MIN THK		2-520273-2
MATERIAL & FINISH			PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± .015 ANGLES ± -	DR 11/9/88 P FORTNEY	AMP INCORPORATED Harrisburg, Pa. 17105		
	CHK 11/9/88 MS FEHER			
	APPD 11/11/88 K RANDOLPH	NAME RECEPTACLE ASSY, ULTRA-FAST, LOOSE PIECE, .110/.125 SERIES, 22-18 AWG		
	APPD 11/11/88 TL SHUTTER	SIZE <b>B</b>	FSCM NO 00779	DRAWING NO 520273
MATERIAL SEE TABLE	PRODUCT SPEC 108-2043	SCALE 5:1		
FINISH SEE TABLE	APPLICATION SPEC 114-2035	SHEET 1 OF 1		
WEIGHT -				