

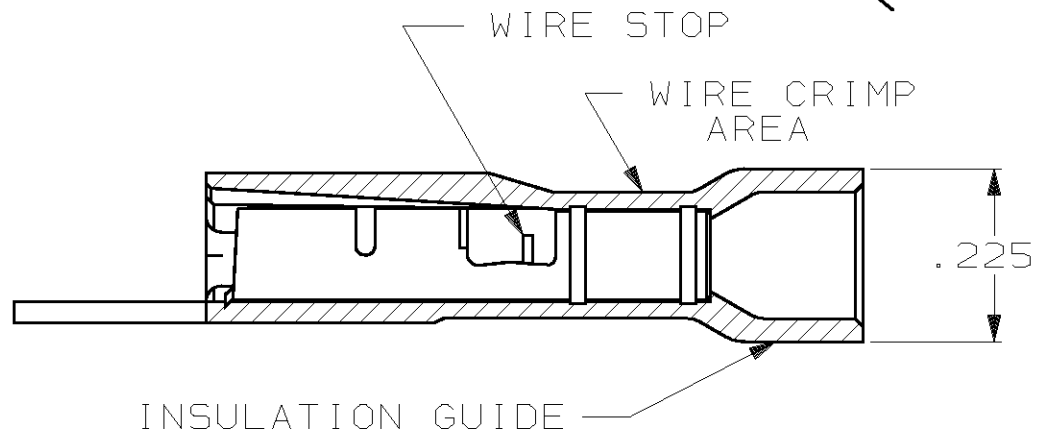
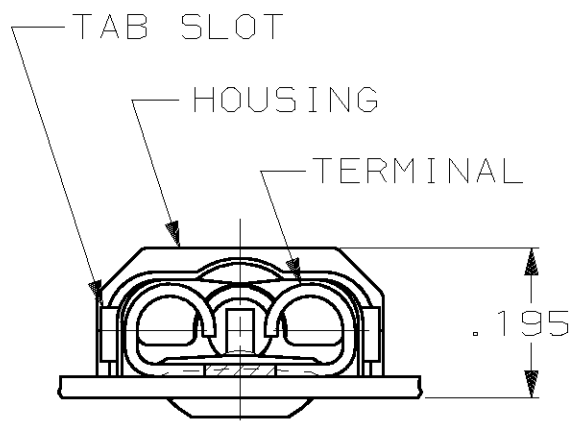



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC AF	DIST 50	P	F	REVISIONS			DATE	APPD
				ZONE	LTR	DESCRIPTION		
					J	REV PER 0G1A-0147-99	3JUN99	JR JH

- 1 MATES WITH .032±.001×.250 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .160 MAX DIA
- 4 CONTINUOUS STRIP ON REELS
- △5 DIMENSION DOES NOT INCLUDE TRIM BURR
- △6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

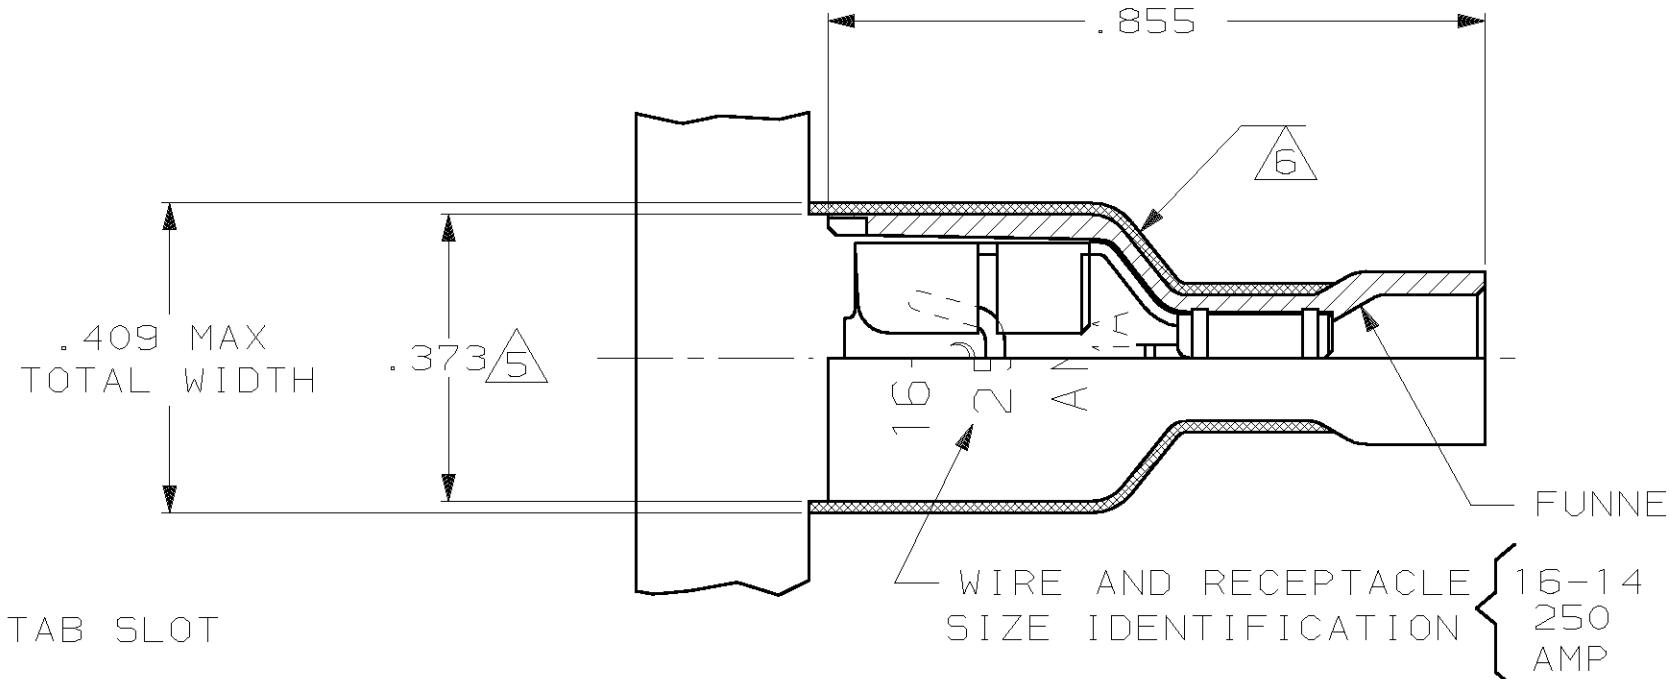

HOUSING: NYLON, COLOR-BLUE TRANSLUCENT		3-520116-2	
RECEPTACLE: #3 HARD PHOS BRONZE TIN PL .000080 MIN THK			
MATERIAL & FINISH		PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± .015 ANGLES ± -	DR 10/18/88 P FORTNEY	 AMP INCORPORATED Harrisburg, Pa. 17105	
	CHK 10/18/88 JR RUTH		
MATERIAL SEE TABLE	APPD 10/21/88 K RANDOLPH	NAME RECEPTACLE ASSY, ULTRA-FAST, .250 SERIES, 16-14 AWG	
	APPD 10/21/88 TL SHUTTER		
FINISH SEE TABLE	PRODUCT SPEC 108-2043	SIZE B	FSCM NO 00779
	APPLICATION SPEC 114-2123	DRAWING NO 520116	SCALE 4:1
	WEIGHT -	SHEET	1 OF 1