THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER		TAB SIZE	AWG WIRE RANGE (mm^2)	HOUSING COLOR	MAX WIRE INSUL DIA	DIMENSIONS in.			
PREFIX	PK					A ±.03 (,8)	B ±.02 (,5)	W ±.01 (,3)	X ±.03 (,8)
DNFR18-250B	-C -M	.250 X .032 (6,3 X 0,8)	22-18 (0,5-1,0)	RED	.130 (3,30)	.78 (19,8)	.20 (5,1)	.36 (9,1)	.62 (15,7)
DNFR14-250B	-C -M	.250 X .032 (6,3 X 0,8)	16-14 (1,5-2,5)	BLUE	.155 (3,94)	.78 (19,8)	.20 (5,1)	.36 (9,1)	.63 (16,0)
DNFR18-205B	-C -M	.205 X .032 (5,2 X 0,8) OR .187 X .032 (4,8 X 0,8)	22-18 (0,5-1,0)	RED	.130 (3,30)	.78 (19,8)	.20 (5,1)	.36 (9,1)	.62 (15,7)
DNFR14-205B	-C -M	.205 X .032 (5,2 X 0,8) OR .187 X .032 (4,8 X 0,8)	16-14 (1,5-2,5)	BLUE	.155 (3,94)	.78 (19,8)	.20 (5,1)	.36 (9,1)	.63 (16,0)
DNFR18-206B	-C -M	.205 X .020 (5,2 X 0,5) OR .187 X .020 (4,8 X 0,5)	22-18 (0,5-1,0)	RED	.130 (3,30)	.78 (19,8)	.20 (5,1)	.36 (9,1)	.62 (15,7)
DNFR14-206B	-C -M	.205 X .020 (5,2 X 0,5) OR .187 X .020 (4,8 X 0,5)	16-14 (1,5-2,5)	BLUE	.155 (3,94)	.78 (19,8)	.20 (5,1)	.36 (9,1)	.63 (16,0)

LISTED
20H3
E78522

CERTIFIED
LR31212

NOTES:

1. USED FOR:
   A. 600V MAX VOLTAGE RATING
   B. 221°F (105°C) MAX INSULATION TEMP. RATING
   C. STRANDED COPPER WIRE ONLY
2. FIRST INSERTION FORCE - 12 LB. (53N) MAX
   FIRST WITHDRAWAL FORCE - 12 LB. (53N) MAX
   6 LB. (27N) MIN
3. INSTALLATION TOOLS:
   A. CT-1525
4. WIRE STRIP LENGTH: 9/32 $^{+1/32}_{-0}$ (7.1 $^{+.8}_{-0}$)
5. MATERIAL USED:
   A. TERMINAL STAMPING: .018 (.46) (THK) TIN PLATED BRASS
   B. HOUSING : NYLON
6. PACKAGING:
   A. STD : -C = 100
   B. BULK: -M = 1000
7. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS OR mm^2

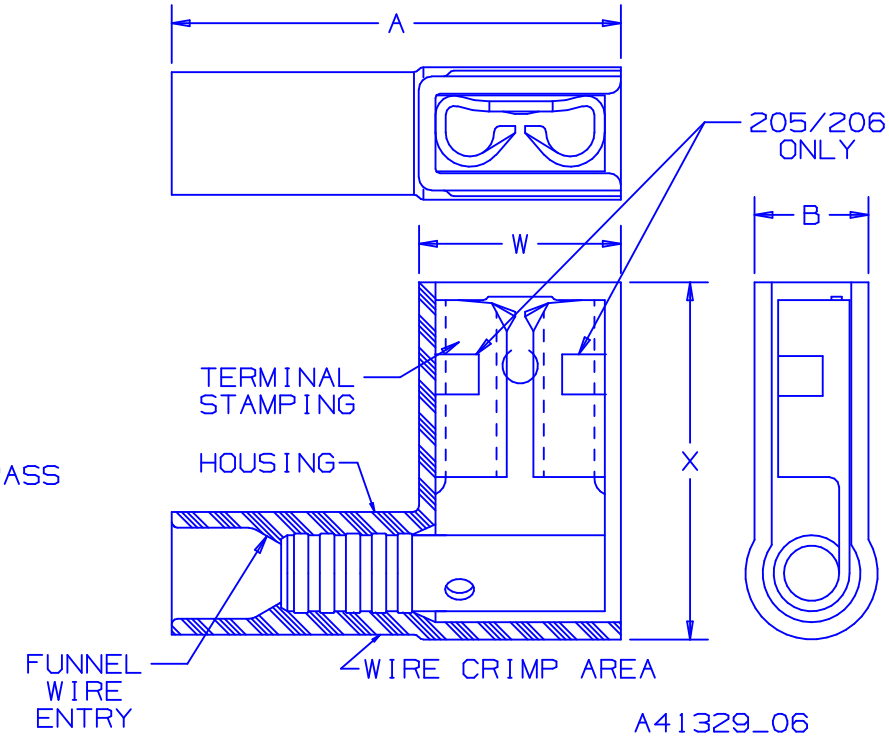

A41329_06

REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM
06	11/04	KLFU		UPDATED DRAWING			
05	8/01	SAB	SKB	REMOVED CT-100 AND CT-520 FROM NOTE 3, AND REMOVED WITH CT-1525 TOOL ONLY FROM UNDER THE UL SYMBOL.	09538	JAC	BAD
04	5/98	TM	JAW	ADDED CT-1525 AND U.L. SYMBOL	06872	LA	DH
03	8/96	JB	JW	REVISE ORIENTATION OF ALL VIEWS	04923	LA	DH

PANDUIT CORP. TINLEY PARK, ILLINOIS

MOLDED NYLON INSULATED RIGHT ANGLE
FEMALE DISCONNECTS, BUTTED SEAM

DRAWN BY	CHK'D	SCALE	DRAWING NO.
DAW	RLS	NONE	A41329