


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14		F	REDRAWN PER ECR 07-020117	23AUG07	JR	TM

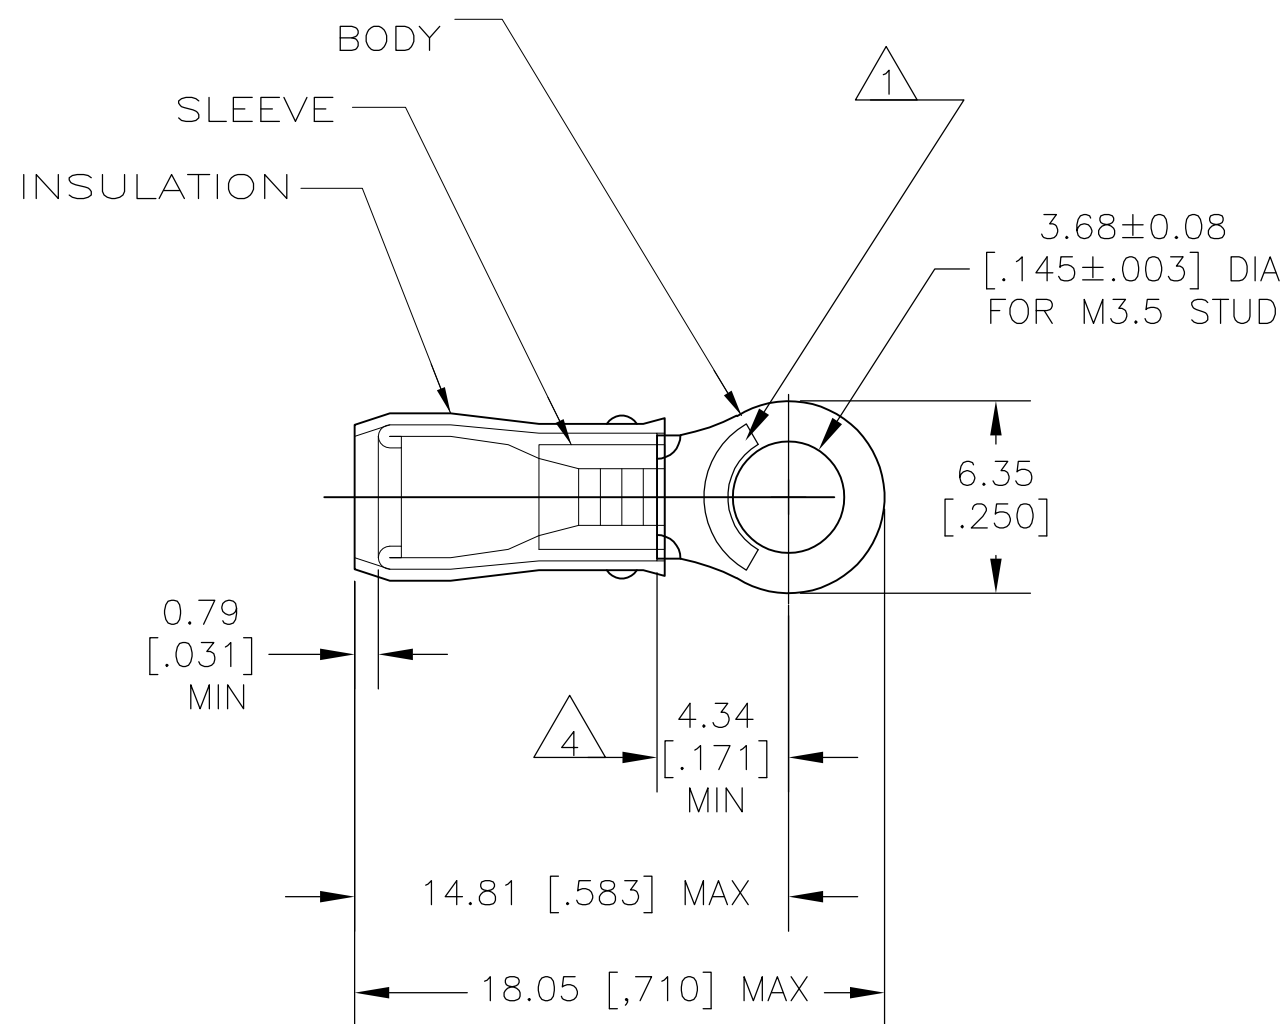

- 1 STAMP AMP 14-12, LOCATION AS SHOWN.
- 2 WIRE INSULATION DIA RANGE IS 2.0-3.2 [.080-.125] DIA
- 3 TONGUE MATERIAL THK IS 0.75±0.05 [.0295±.002]
- 4 DIMENSION APPLIES FROM CENTER OF STUD HOLE TO EDGE OF WIRE BARREL.
- 5 MATERIAL: BODY - COPPER PER ASTM B-152 SLEEVE - NYLON, COLOR WHITE
- 6 FINISH: BODY - TIN PLATE PER ASTM B-545
- 7 MAX RECOMMENDED OPERATING TEMP .105°C
- 8 VOLTAGE RATING: 300 V MAX
- 9 WIRE CROSS SECTIONAL AREA RANGE: 1.20-4.18 mm<sup>2</sup> [3,260-8,240 CMA]

<b>AMP</b> WIRE RANGE
14-12 AWG SOLID OR STRANDED

500	LOOSE PIECE	152875
QTY	PACKAGE TYPE	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 23AUG07	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: MM [INCHES]		CHK T MICHELUTTI 23AUG07		
		APVD T MICHELUTTI 23AUG07	NAME TERMINAL, RING TONGUE, NYLON , P.I.D.G. WIRE SIZE: 14-12 AWG	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	RESTRICTED TO	
0 PLC ± -		APPLICATION SPEC	SIZE	CAGE CODE
1 PLC ± 0.2		WEIGHT	DRAWING NO	
2 PLC ± -		A300779 C-152875		
3 PLC ± -		CUSTOMER DRAWING		
4 PLC ± -		SCALE 4:1		
4 PLC ANGLES ± -		SHEET 1 OF 1		
MATERIAL - 5		REV F		
FINISH - 4				