


C-170733

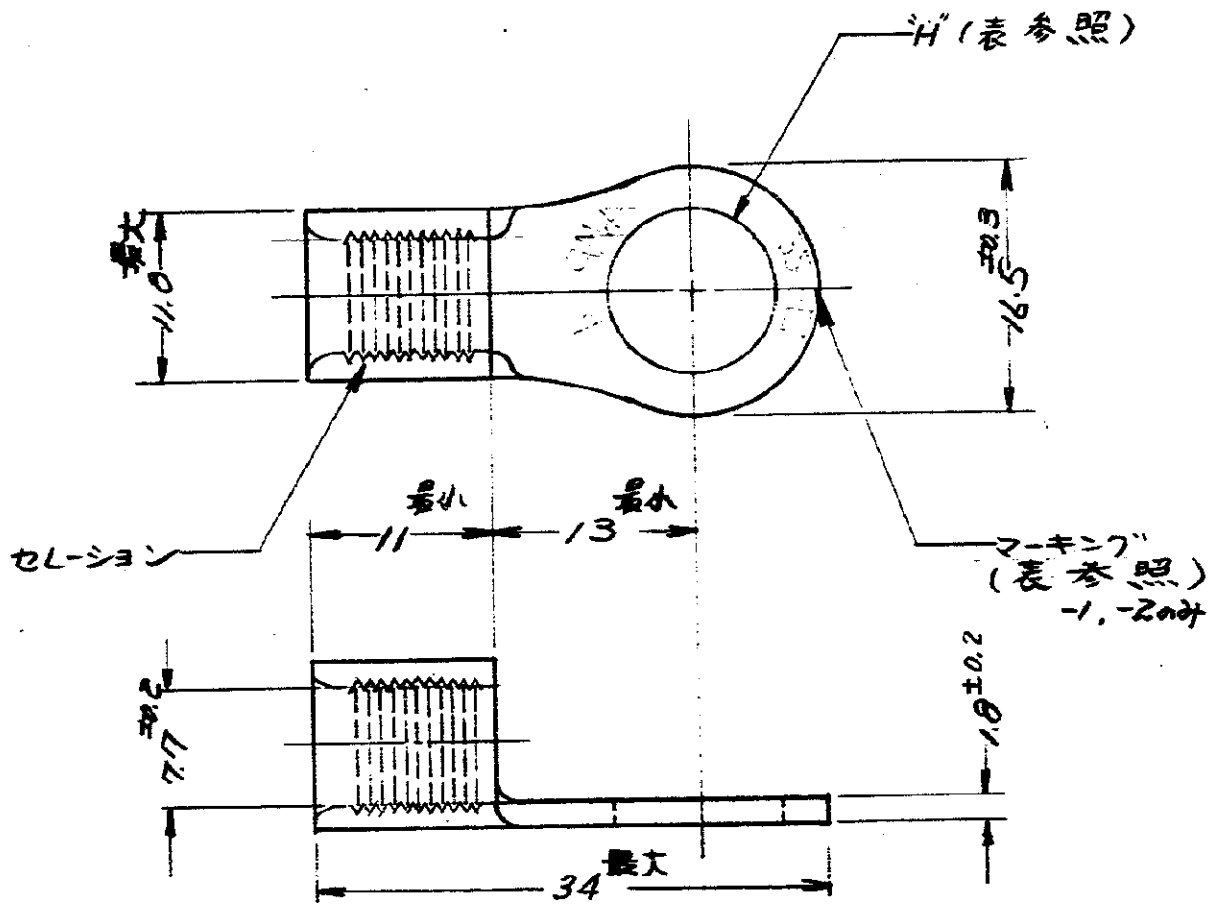

型番	スタッド	H ±0.25	マキング
C-170733-1	6MM	6.6	22-6
C-170733-2	8MM	8.6	22-8
C-170733-3	10MM	10.7	

G2	DELETE MARK	3/17/70	Y.S.
G1	REVISED (REV. A)	4/9/70	Y.S.
G	REVISED (REV. A)	5/10/70	S.O.
F1	ADD. (REV. B)	5/10/70	T.T.
F	REVISED (REV. B)	5/10/70	Z.K.
E	REVISED (REV. A)	5/10/70	Y.S.
D	REVISED (REV. A)	5/10/70	Y.S.
C	ADD JIS MARK	5/10/70	Y.S.
B	REVISED (REV. A)	5/10/70	Z.K.
A	DELETE MARK	5/10/70	Z.K.
O	RELEASED (REV. O)	5/10/70	Z.K.
LTR	変更 REVISION RECORD	DR.	CHK. DATE
DR.	K. Nakagaki	3/13/70	
DE.	Y. Irie	3/13/70	
CHK.	K. Nakagaki	3/13/70	

AMP JAPAN, LTD. ALL RIGHTS RESERVED AMP PRODUCTS COVERED BY PATENTS AND OR PATENTS PENDING

参考図面
CUSTOMER COPY
REFERENCE ONLY

MATERIAL 電気鋼

FINISH 焼付

WIRE RANGE 1.27-2.14 mm AWG #4

INSULATION DIA. 0.1 IN

ソリストラッド

TRADE MARK

AMP

日本エー・イー・ピー株式会社
TOKYO, JAPAN

公差 TOLERANCE EXCEPT AS NOTED

SCALE 2-1

LOC SIZE 番号 NO. J A C-170733

REV 5

品名 丸型端子