


LOC	QTY	REV	ZONE	LTR	DESCRIPTION	DATE	APPD
G	14	F			REVISED & REDRAWN PER 0720-0040-93	4-8-93	1 st DAP
					REACTIVATED 324209 PER 0720-6018-92		

METRIC
DIMENSIONS LISTED IN mm [INCHES]

AMP WIRE RANGE	IL E13288 Listed
12-10 AWG SOLID OR STRANDED	12-10 AWG STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
12-10 AWG SOLID OR STRANDED	NOT APPLICABLE

△ STAMP AMP 12-10* APPROX AS SHOWN

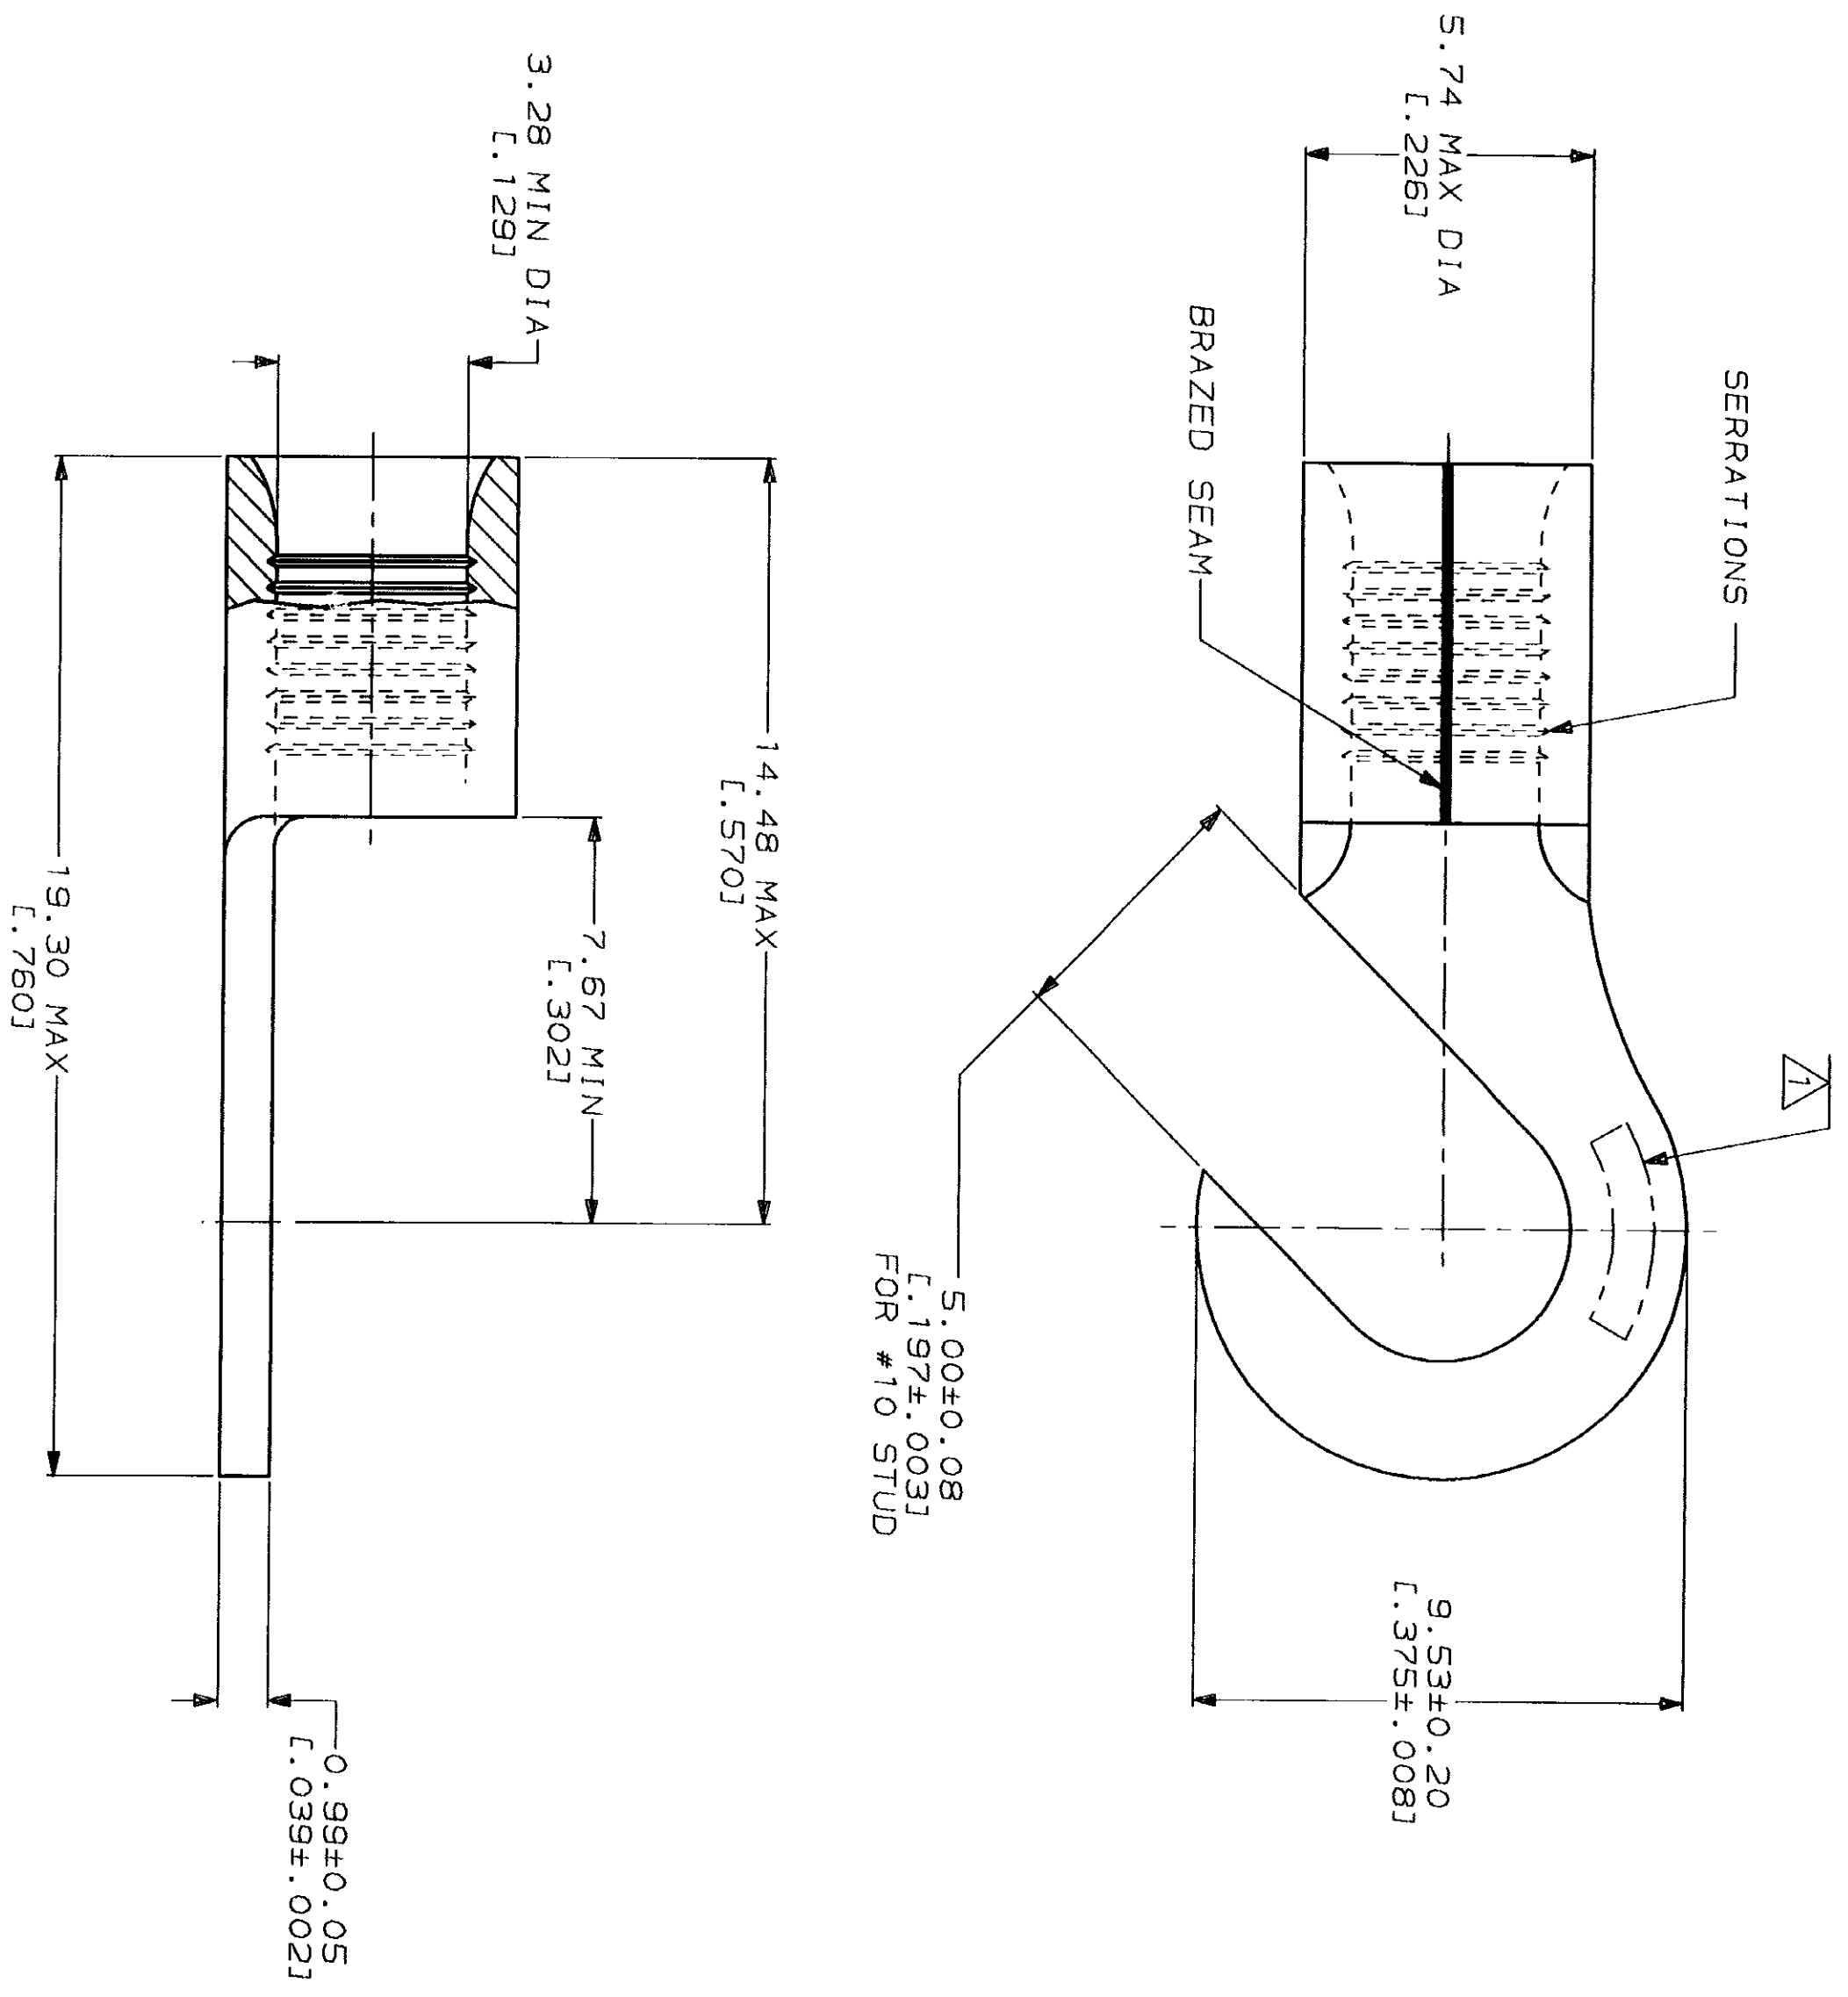

**AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS**

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX
VOLTAGE RATING: NOT APPLICABLE
WIRE CROSS SECTIONAL AREA RANGE: 2.62-6.64mm² (5,180-13,100) CIR MILS
SOLID OR STRANDED

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC # - - 3 PLC DEC # - - ANGLES

FINISH: TIN PLATE
0.00254 [0.000100] MIN THK PER MIL-T-10727

DR 4-8-93 TA BRINKMAN
CHK 4-8-93 DA PATTERSON
APPD 4-8-93 DE MILLER
APPD 4-8-93 JL MECKLEY

AMP
AMP Incorporated
Harrisburg, PA 17105-3508

TERMINAL, HOOK
TONGUE, SOLISTRAND™

QUANTITY	2500	ON TAPE	2-324209-1
	---	LOOSE PIECE	324209
PACKAGING TYPE		PART NO	
SIZE	CAGE CODE	DRAWING NO	
SCALE	00779	324209	
	8:1		