



LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	N	REV PER 0G3A-0260-03	24APR03	JR DD

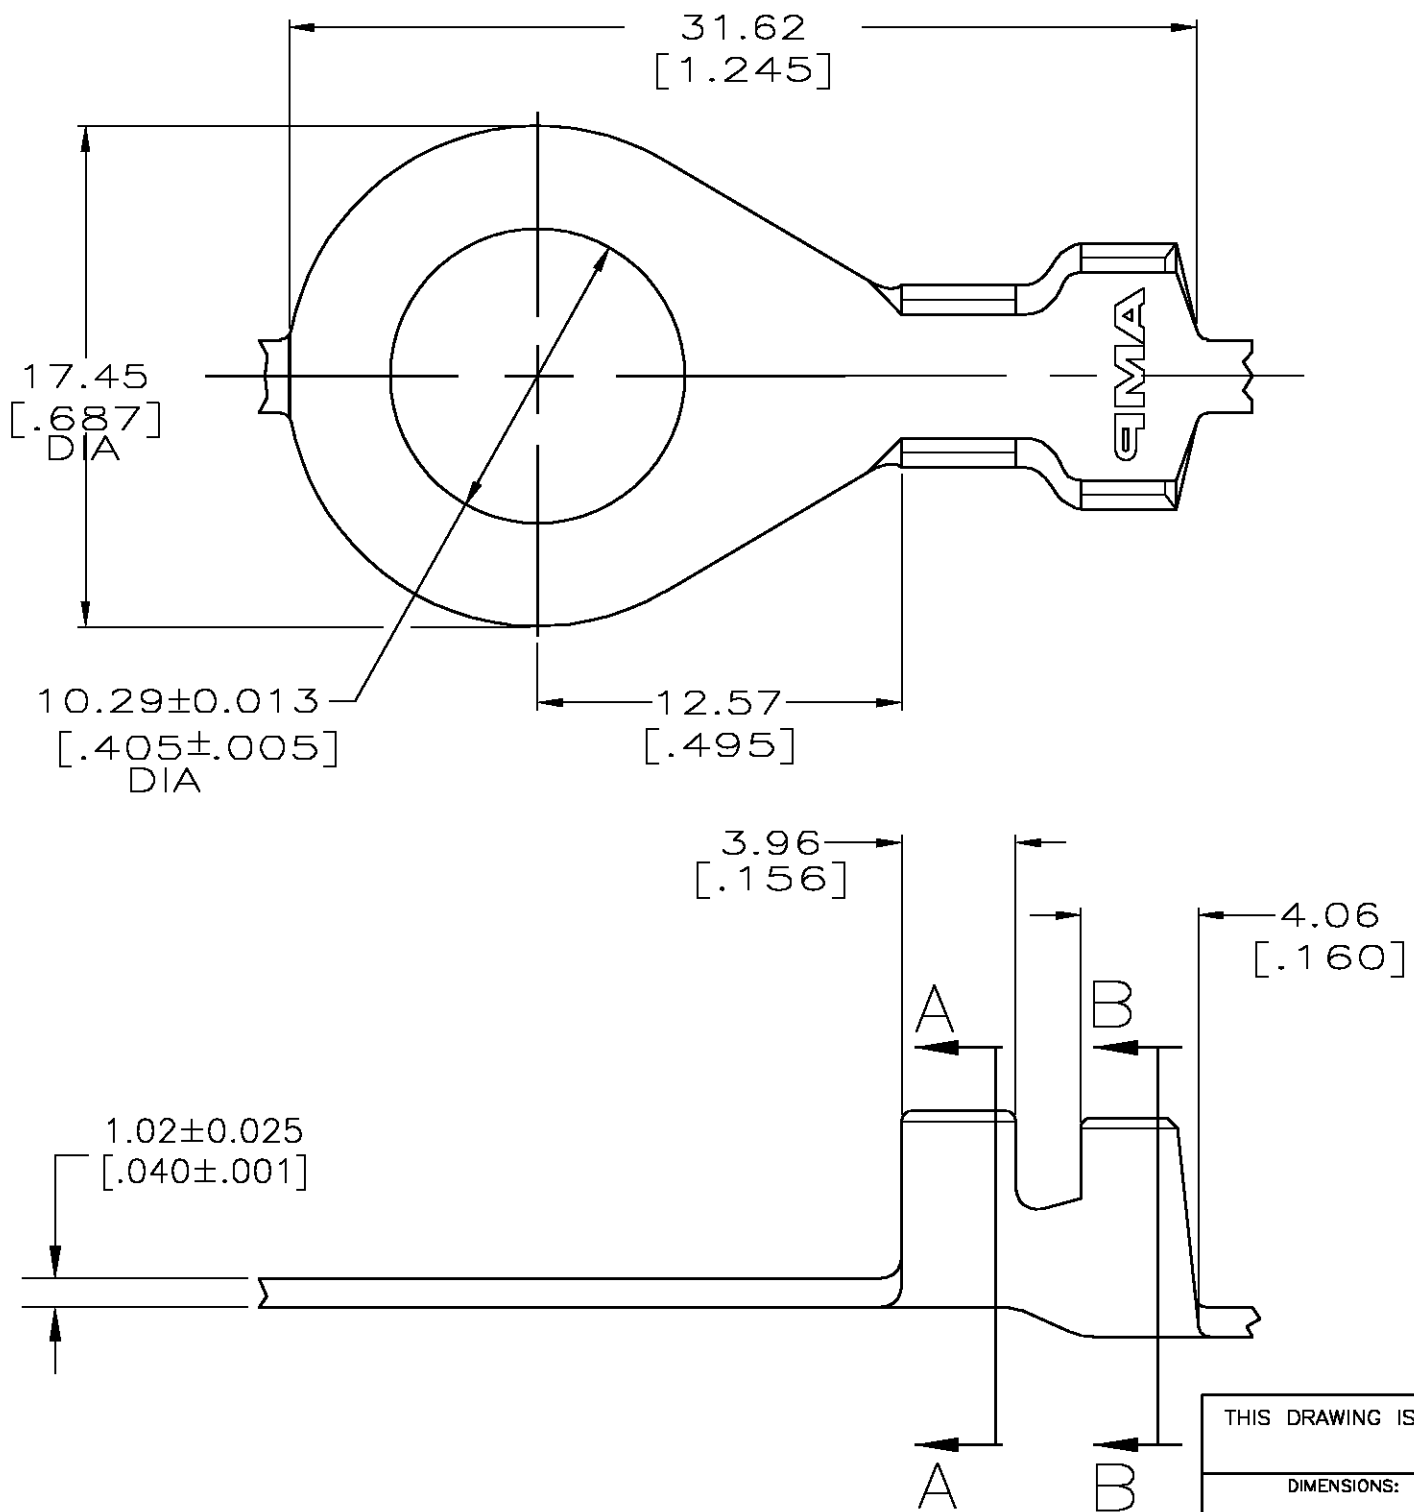

- 1 CONTINUOUS STRIP ON REEL.
- △ 2 0.00381-0.00635 [.000150-.000250] TIN PLATE PER MIL-T-10727 OVER 0.00127 [.000050] MIN NICKEL UNDERPLATE PER QQ-N-290.
- 3 WIRE RANGE IS 12-8 AWG
- 4 INSULATION RANGE IS 3.81-5.59 [.150-.220] DIA
- △ 5 0.002032 [.000080] MIN THK TIN PLATE

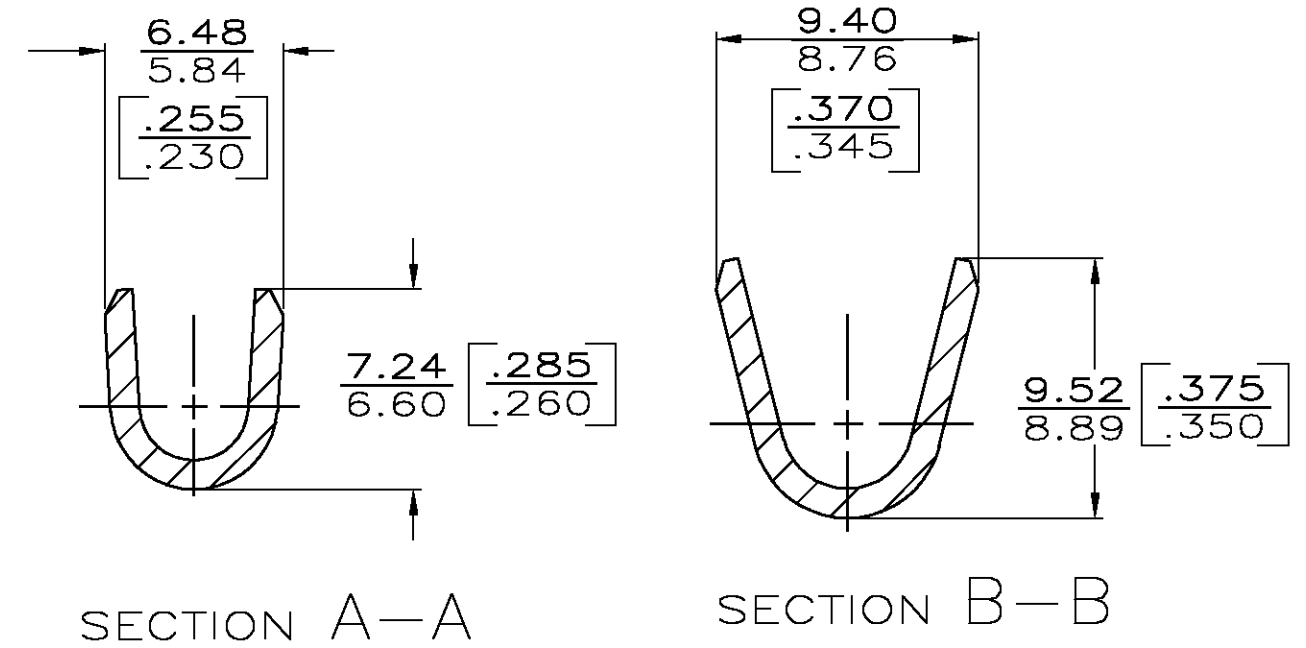

△ 2	42947-3
△ 5	42947-2
FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 25/JAN/96 PHILLIP M. FORTNEY	Tyco Electronics Corporation Harrisburg, PA 17105	
DIMENSIONS: INCHES		CHK 25/JAN/96 JEFF R RUTH	NAME RING	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 25/JAN/96 MARK BARNABA	PRODUCT SPEC -	
0 PLC ± -		APPLICATION SPEC -	RESTRICTED TO -	
1 PLC ± -		WEIGHT -	SIZE A3	CAGE CODE 00779
2 PLC ± 0.25 [.010]		CUSTOMER DRAWING	DRAWING NO C-42947	SCALE 4:1
3 PLC ± -			SHEET 1 OF 1	REV N
4 PLC ± -				
ANGLES ± -				
MATERIAL 082 BRASS	FINISH SEE TABLE			