


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS				
				ZONE	LTR	DESCRIPTION	DATE	APPD
G	14				N	REV PER OG3A-0199-99	16FEB00	JR/TM

AMP WIRE RANGE	 E13288 Listed	 LR7189 Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED

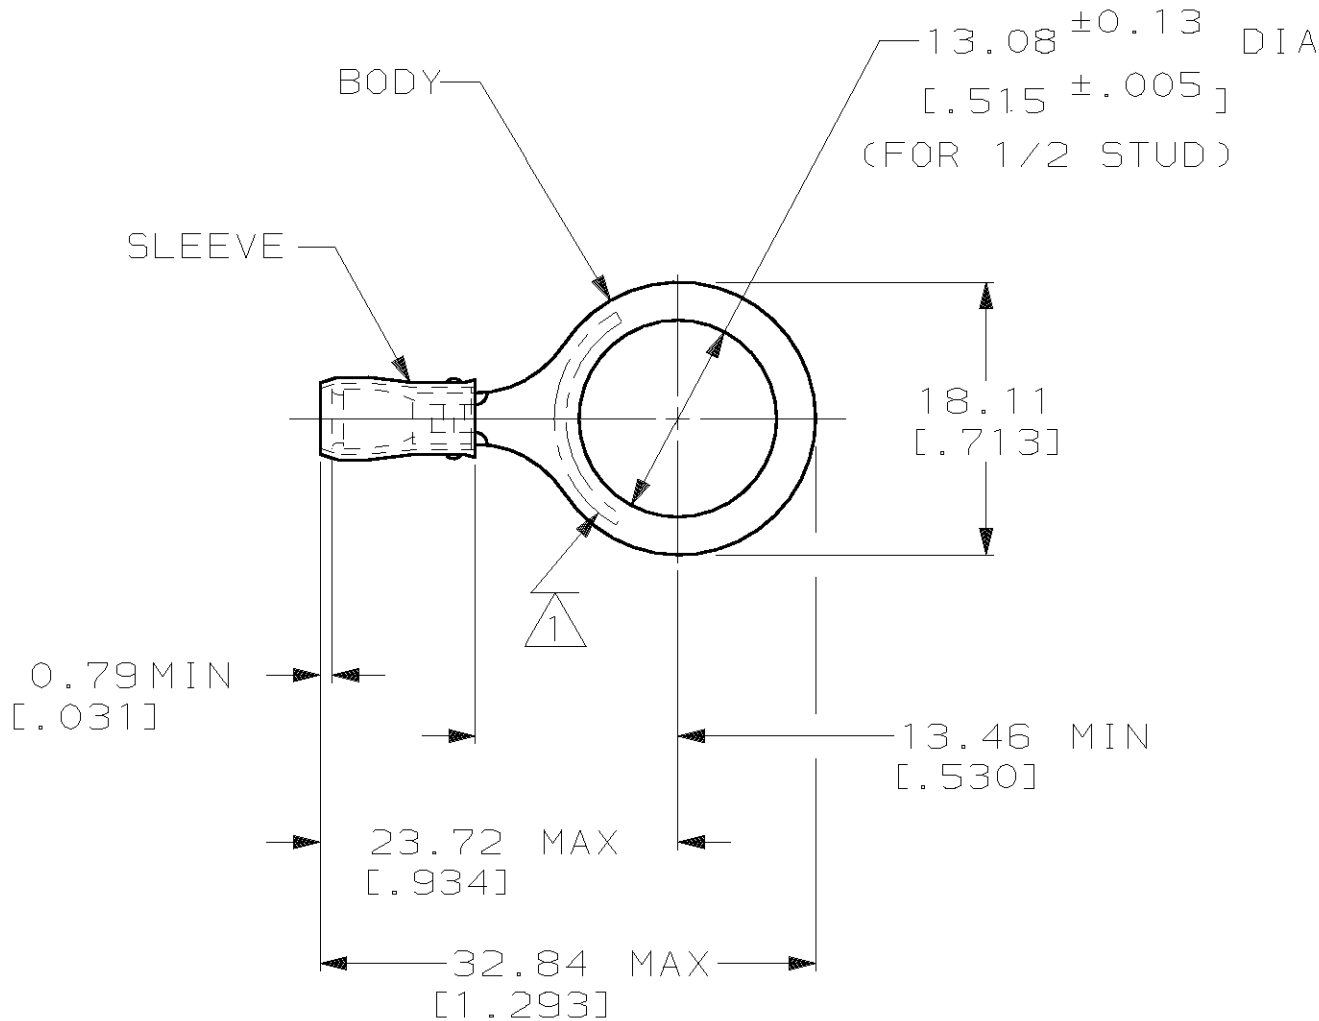

- 1 STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPEC MIL-T-7928
COMMERCIAL WIRE RANGE IS 22-16
- 2 WIRE INSULATION DIA: 2.03 - 3.18
[.080 - .125]
- 3 TONGUE MATERIAL THK: 0.79±0.05
[.031±.002]

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS


FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111

FOR ORDER ENTRY 1-800-526-5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C MAX
VOLTAGE RATING: 300 V MAX
CIRCULAR MIL AREA: 0.26-1.65mm ² [509-3,260] CIR MILS SOLID OR STRANDED

MS25036-151 CLASS 1 & 2	100	LOOSE PIECE, BOX	8-328975-1
MILITARY P/N AND CLASS	1000	LOOSE PIECE	328975
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.20[.008] 3 PLC DEC ± - ANGLES ± -	QUANTITY	PACKAGE TYPE	PART NO
MATERIAL COPPER PER ASTM B-152 SLEEVE, RED NYLON	DR 9/8/93 DK SCHRUM CHK 9/8/93 RE HERSEY APPD 9/8/93 ML ELLIS APPD 9/8/93 M BARNABA	NAME	AMP Incorporated Harrisburg, PA 17105-3608
FINISH TIN PLATE PER ASTM B545	PRODUCT SPEC UL 486A APPLICATION SPEC NOT AVAILABLE	SIZE	TERMINAL, RING TONGUE, PIDG™, WIRE SIZE, 22-16 AWG
WEIGHT -	SCALE	CAGE CODE	NAME
	NTS	DRAWING NO	
		SHEET	
		1 OF 2	

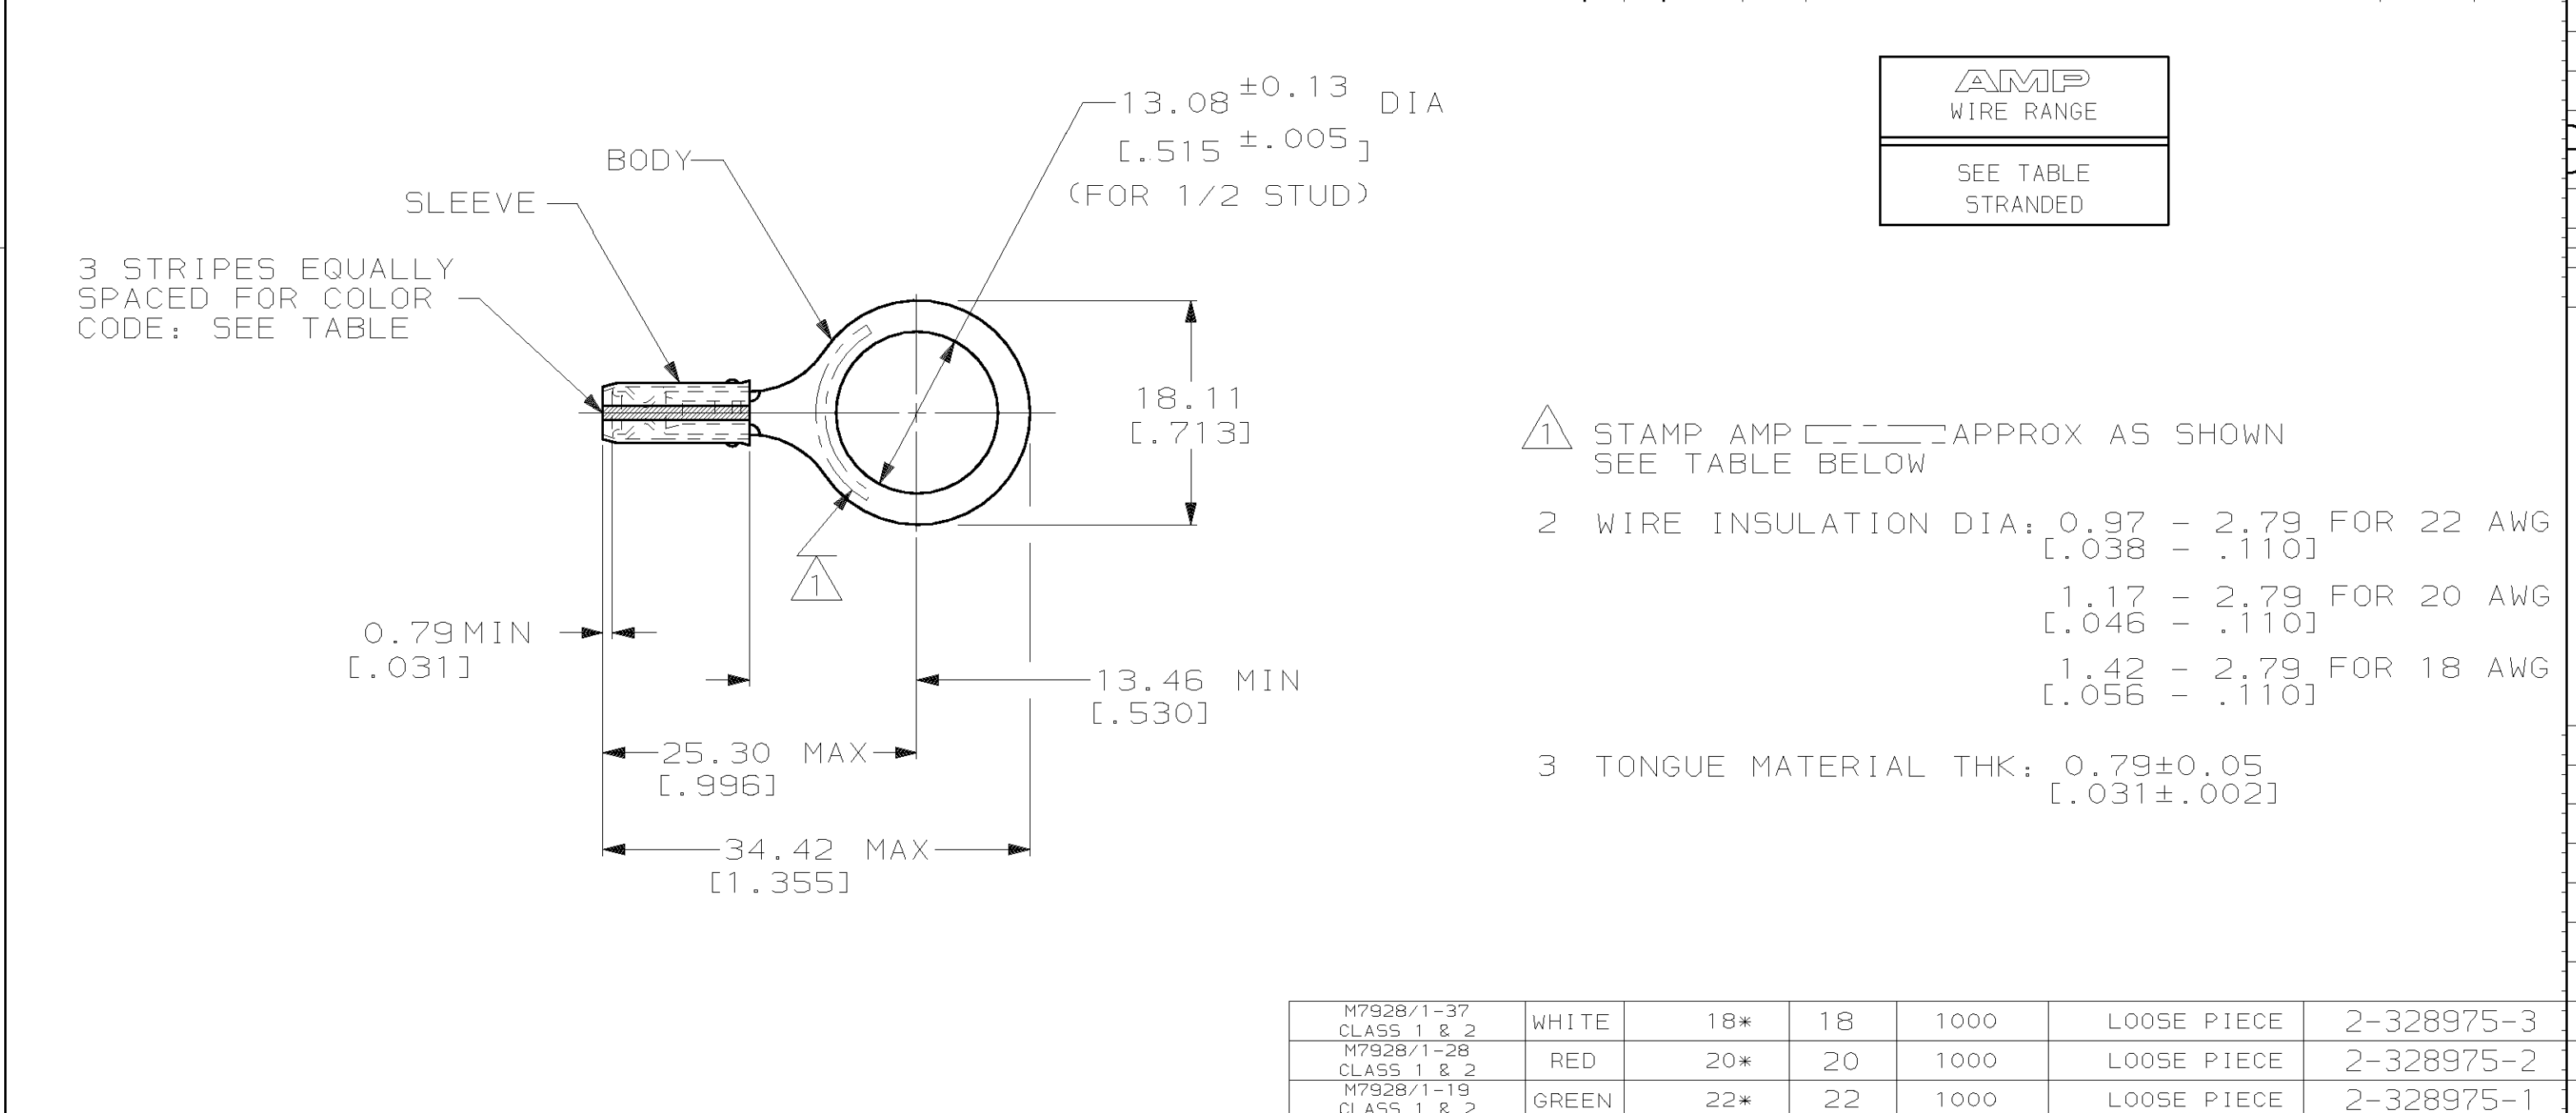

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C MAX		M7928/1-37 CLASS 1 & 2	WHITE	18*	18	1000	LOOSE PIECE	2-328975-3
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		VOLTAGE RATING: 300 V MAX		M7928/1-28 CLASS 1 & 2	RED	20*	20	1000	LOOSE PIECE	2-328975-2
FOR APPLICATION		WIRE RANGE: CIRC MIL AREA		M7928/1-19 CLASS 1 & 2	GREEN	22*	22	1000	LOOSE PIECE	2-328975-1
TOOLING INFORMATION		22 0.38mm² [754]		MILITARY P/N AND CLASS	STRIPE COLOR	STAMPING	WIRE SIZE	QUANTITY	PACKAGE TYPE	PART NO
FOR ORDER ENTRY		20 0.60mm² [1,186]		DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.20[.008] 3 PLC DEC ± - ANGLES ± -		DR 9/8/93 DK SCHRUM		AMP AMP Incorporated Harrisburg, PA 17105-3608		
		18 0.96mm² [1,900]		MATERIAL COPPER PER ASTM B-152 SLEEVE, RED NYLON		CHK 9/8/93 RE HERSEY		NAME TERMINAL, RING TONGUE, I.R., PIDG™, WIRE SIZE, 22-16 AWG		
		STRANDED		FINISH TIN PLATE PER ASTM B545		APPD 9/8/93 ML ELLIS		SIZE B		
						APPD 9/8/93 M BARNABA		CAGE CODE 00779		
						PRODUCT SPEC -		DRAWING NO C-328975		
						APPLICATION SPEC NOT AVAILABLE		SCALE NTS		
						WEIGHT -		SHEET 2 OF 2		