


METRIOR
DIMENSIONS LISTED IN mm [INCHES]

WIRE RANGE	E13288 Listed
6 AWG SOLID OR STRANDED	6 AWG STRANDED
6 AWG SOLID OR STRANDED	MILITARY P/N AND CLASS
6 AWG SOLID OR STRANDED	NOT APPLICABLE

△ STAMP AMP SIZE APPROX AS SHOWN

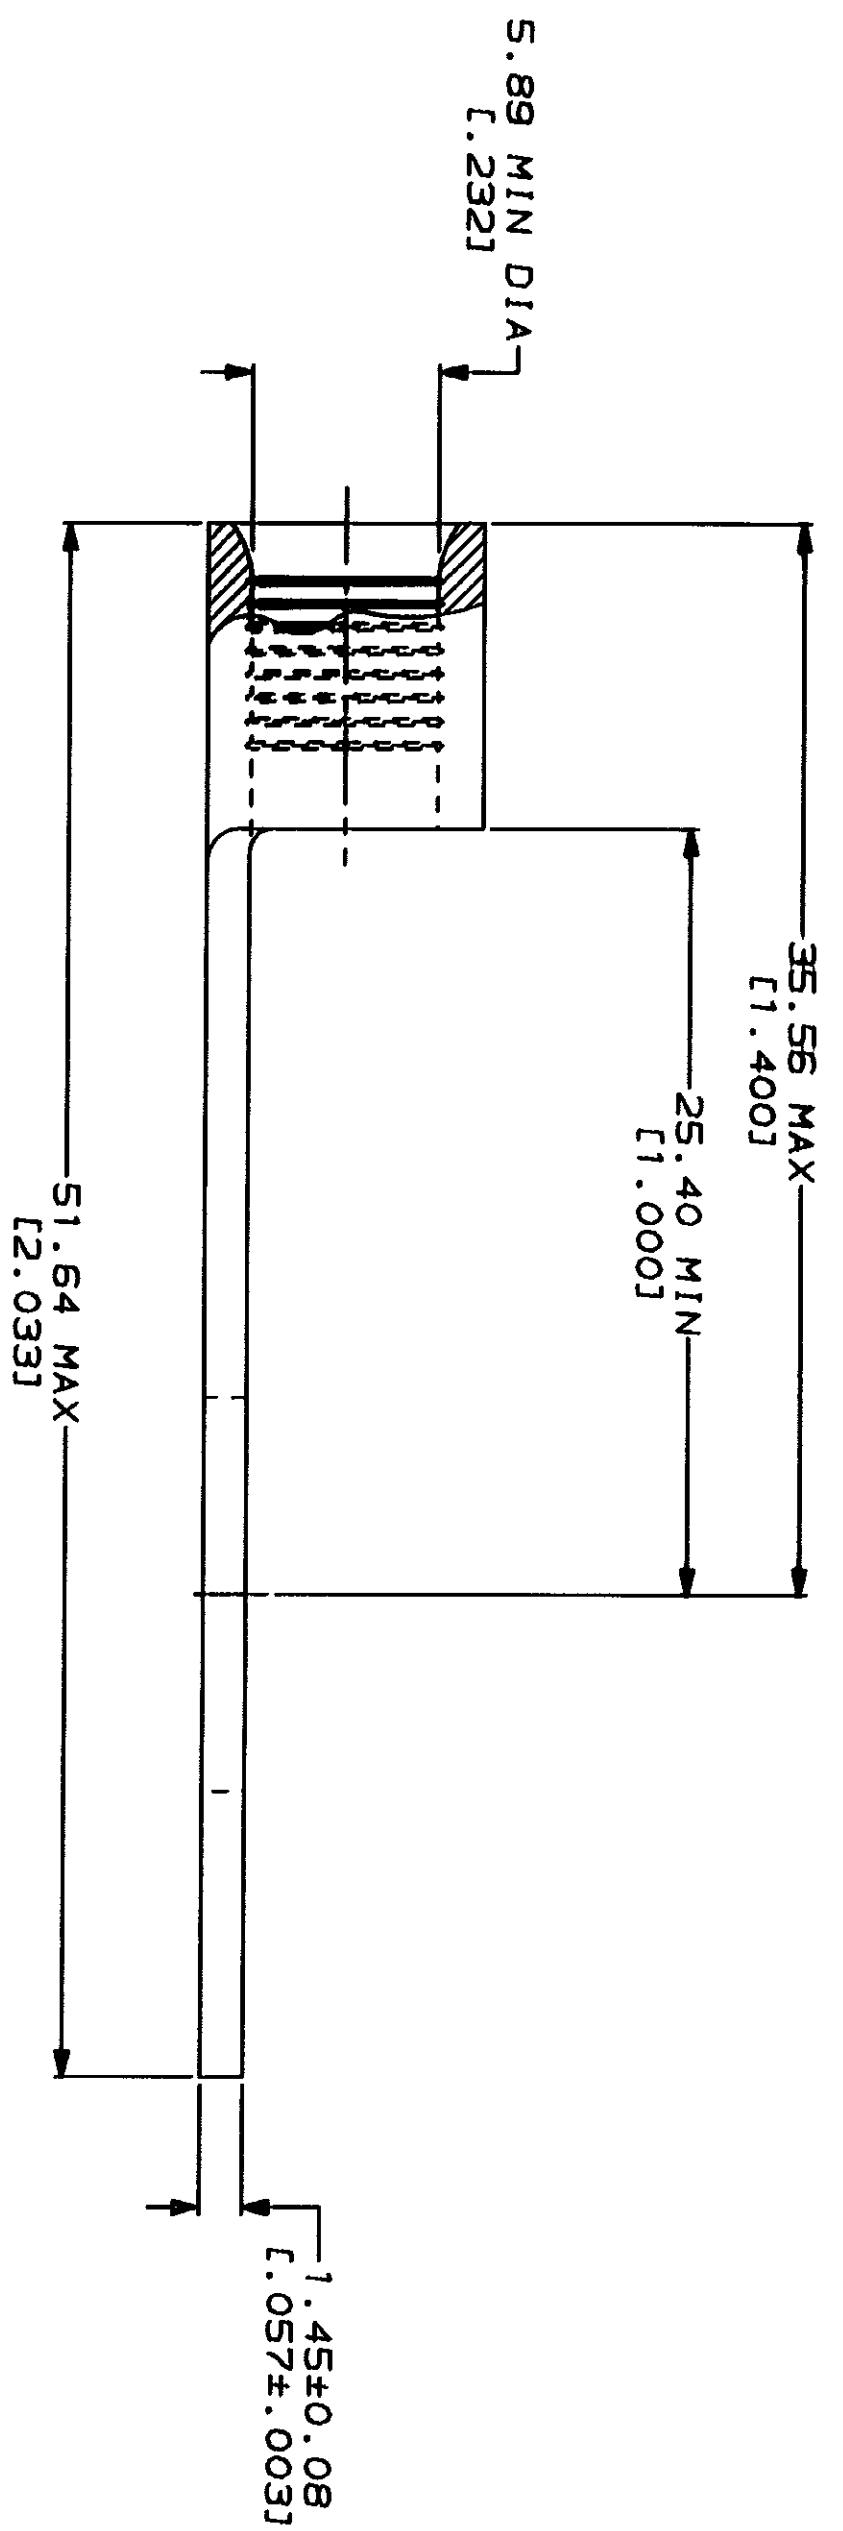

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

FOR APPLICATION
TOOLING INFORMATION
FOR ORDER ENTRY

PRODUCT INFORMATION CENTER
1-800-522-6752

TOOLING ASSISTANCE CENTER
1-800-722-1111

1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE: 170°C MAX

VOLTAGE RATING:
NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE:
10.5-16.8mm² [20,800-33,100] CIR MILS
SOLID OR STRANDED

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
DIMENSIONS IN INCHES ARE
APPROXIMATE

FINISH
TIN PLATE
0.00254 [1.000100] MIN
TKM PER MIL-T-10727

DR 3-24-93
TA-SHOWMAN

CHK 3-24-93
DUMAS

APP 3-24-93
JL MCKLEY

PRODUCT SPEC

APPLICATION SPEC

500	LOOSE PIECE, BOX	36808-1
-	LOOSE PIECE	36808
QTY	PACKAGE TYPE	PART NO

AMP AMP Incorporated
Harrisburg, PA 17105-3608

TERMINAL, RING TONGUE,
SOLID STRAND™

SIZE G
CAGE CODE 00779
DRAWING NO G-36808

CUSTOMER DRAWING