


©1962 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
B	REDRAWN & ADDED TAPE NO. P-6075 ^{MM}	2-9-70	FCY
C	REVISED, & ADDED STAMPING PER EGN #572 ER	1-11-72	FCY
D	REV / 0610-0131-98	ME 11SEP98	JT

329636

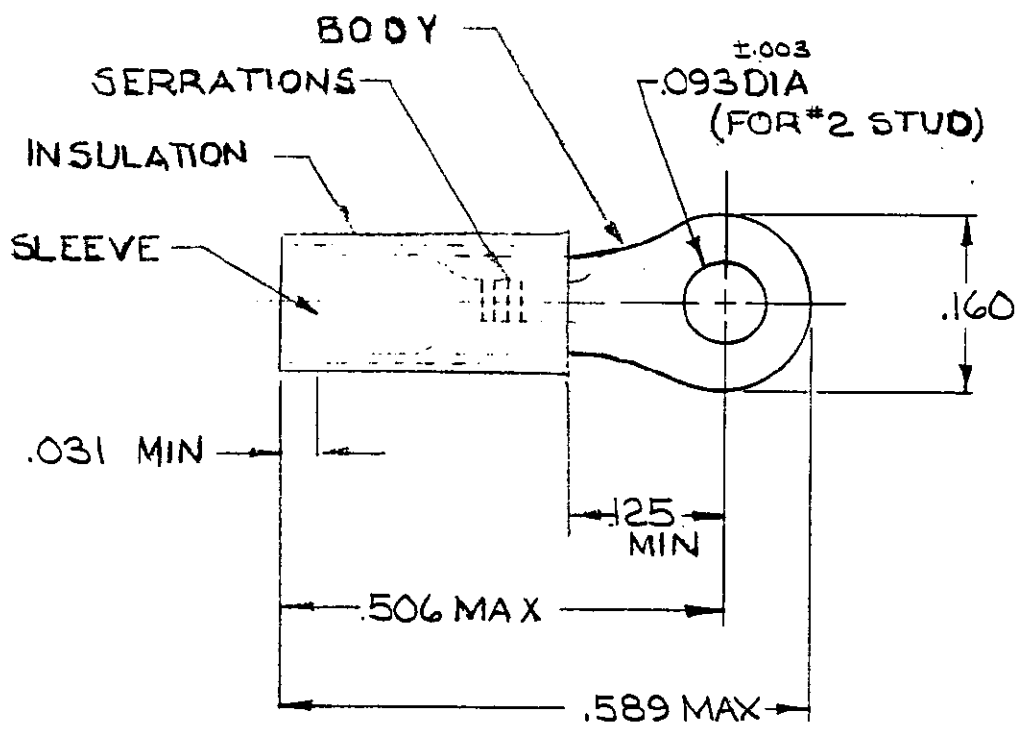

FOR .040 TO .100 WIRE INSULATION DIA.
TONGUE MATERIAL THK = .023 ±.002

QTY	PACKAGE TYPE	PART NO.	MATERIAL & FINISH
250	Loose Pc, Box	8-329636-5	M/F 329636
5000	329636 ON TAPE	2-329636-1	BODY & SLEEVE: COPPER (ASTM B152), TIN PL (ASTM B545)
1000	Loose Pc	329636	INSULATION: NATURAL NYLON (MIL-M-20693) TYPE I

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS DECIMALS ANGLES
 MATERIAL: SEE TABLE

CONTRACT NO. _____
 DR. Wayne Millhiser 2-6-70
 CHK. R.C. Frymoyer 2-9-70
 APPR. L. Wabel 2-9-70
 REL. R.C. Frymoyer 2-10-70
 DSGN. R. PC



AMP INCORPORATED
 SEABOARD DRIVE, WILMINGTON, DE 19806

WIRE TERMINAL
 P1 D G . RING TONGUE
 WIRE SIZE: 24-20

REV	REV IDENT NO.	NUM
A	00779	329636

CUSTOMER-DRAWING