

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS				
G	14			ZONE	LTR	DESCRIPTION	DATE	APPD
					D1	REV PER ECR 07-011918	21MAY07	JR TM


AMP
WIRE RANGE

4 AWG
STRANDED

METRIC

DIMENSIONS LISTED IN mm [INCHES]

1. TONGUE MATERIAL THK 1.22 ± 0.08 [.048 ± .003] FOR 9.70 [.382] MAX INS DIA

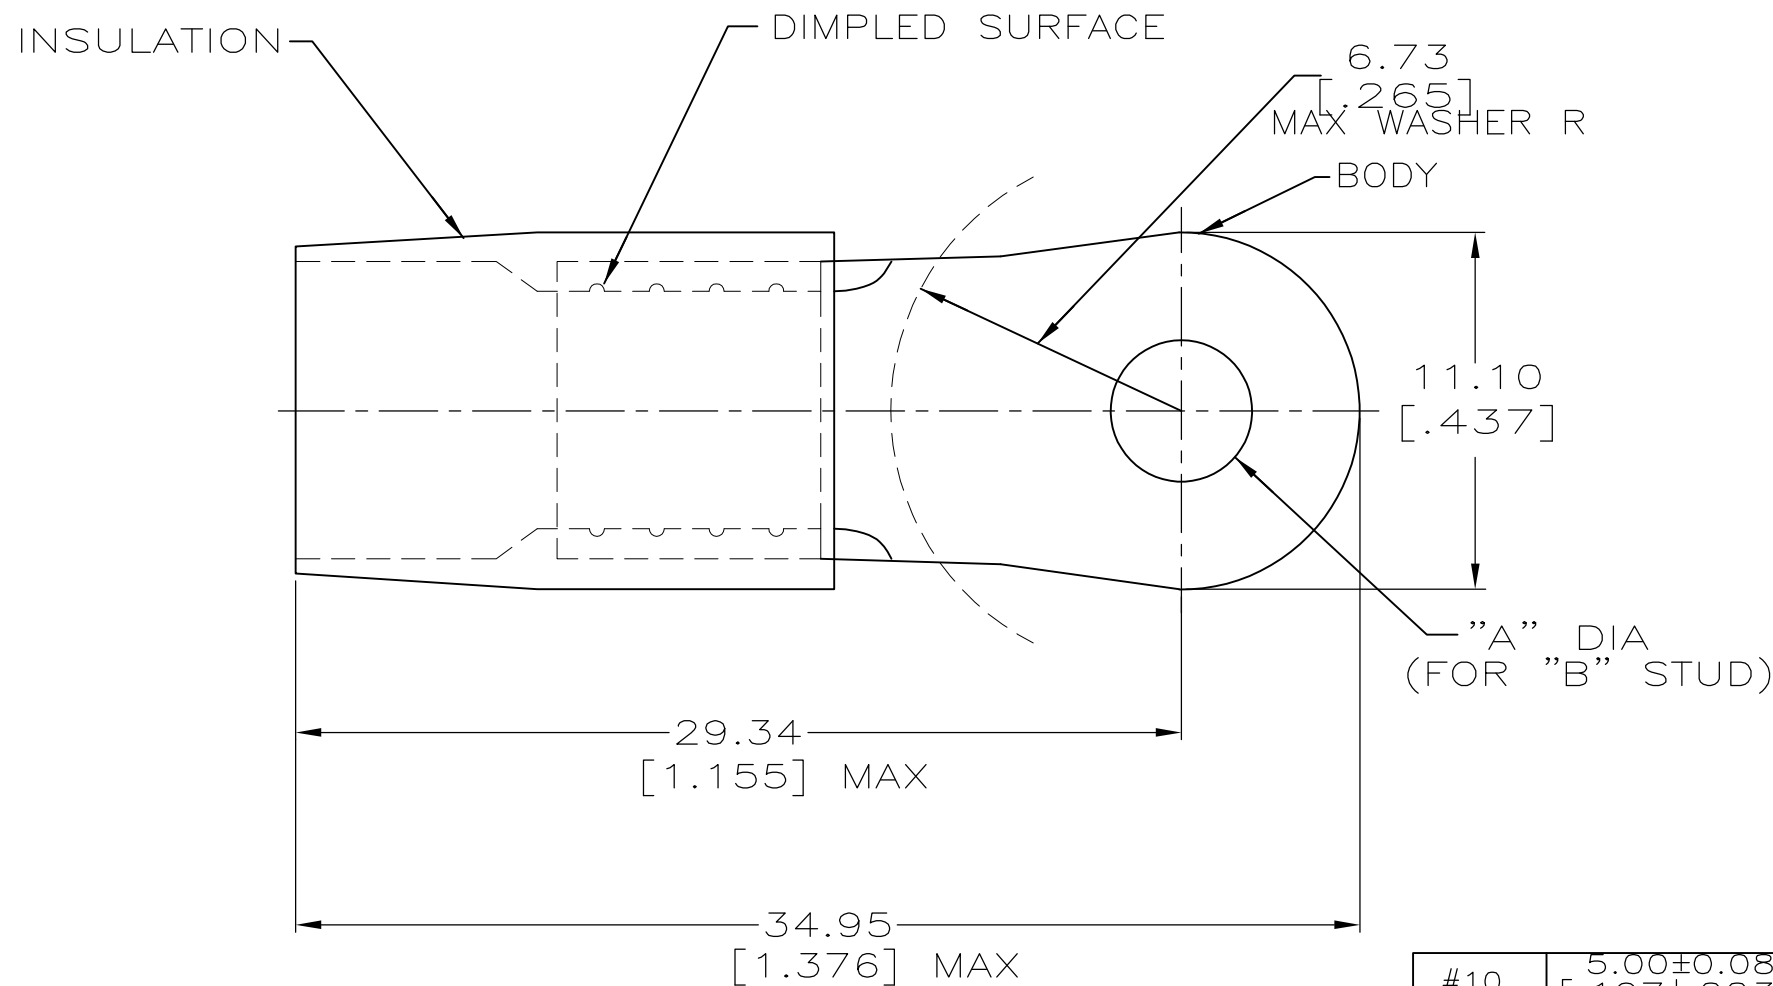

#10	5.00 ± 0.08 [.197 ± .003]	-	LOOSE PC	1-331456-0
#8	4.43 ± 0.08 [.171 ± .003]	-		331456
"B"	"A"	QTY	PACKAGE TYPE	PART NO
DO NOT SCALE PRINT. UNLESS SPECIFIED		DR 6-21-93 S.S. GOULDEN	AMP AMP Incorporated	
DIMENSIONS IN mm [INCHES]		CHK 6-21-93 R. HERSEY	Harrisburg, PA 17105-3608	
TOLERANCES ON:		APPD 6-21-93 B. BARE	NAME	
2 PLC DEC ± 0.20 [.008]		APPD 6-21-93 M. ELLIS	TERMINAL, RING TONGUE, TERMINYL	
3 PLC DEC ± -		PRODUCT SPEC -	WIRE SIZE: 4 AWG	
ANGLES ± -		APPLICATION SPEC -	SIZE	CAGE CODE
MATERIAL		WEIGHT -	B	00779
COPPER PER ASTM B-152			SCALE	DRAWING NO
NYLON (MIL-M-20693) TYPE 1			NTS	C -331456
COLOR: YELLOW				SHEET
FINISH				1 OF 1
TIN PLATE PER MIL-T-10727				

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105° c
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: -
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 16.8-26.7mm² [33,100-52,600] STRANDED
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.