

THIS COPY IS PROVIDED ON	A RESTRICTED BASIS AND IS NOT TO BE U	JSED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.		
Material	High Conductivity Seamless Copper Tube			
Plating	Electro-Tin	.60 R Ref		
Wire Size	1/0 AWG	] / /		
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric			
Wire Strip Length	1.0 in.	PANDUIT PANDUI		
Stud Size	1/2 in.	80±.04 Z + + + + + + + + + + + + + + + + + +		
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	.47±.04 .53±.02 DIA		
UL Temperature Rating	90°C	2.31±.06		
C.S.A Certified Wire Connector	Yes	2.51±.00		
Panduit Color Code on Barrel	PINK			
Panduit Die Index No. on Barrel	P42	.94		
Alternate Industry Die Index No. ( ) on Barrel	(12)	Wire inspection window—		





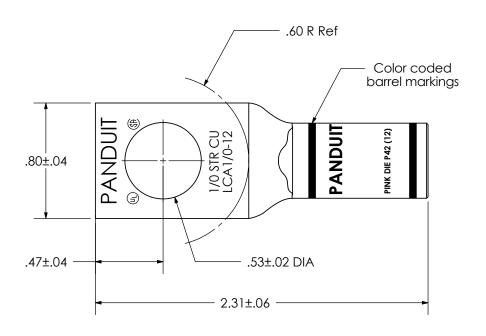

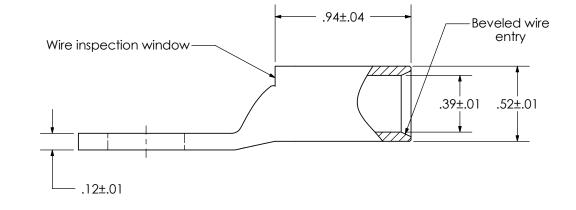

Wire Connector

						PANDUIT CORP. TINLEY PARK, ILLINOIS
						LCA1/0-12-X Copper Lug - One-Hole, Standard Barrel
01	1/08	DRL	DRL	removed navy number from Stamp		Copper Lug - One-Hole, Standard Barrel
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCA1_0-12-CUST