



Designers' Choice

NEW PRODUCTS

THRU-HOLE & SURFACE MOUNT AUTOMOTIVE BLADE FUSE CLIPS

- Available for maxi, standard and mini blade fuses
- Thru hole PC mountable, maintains position during wave soldering
- Space saving, low profile designs
- Horizontal and vertical mini blade clips for Littelfuse ATO 297 series and Bussmann ATM series
- Withstands the rigors of shock and vibration
- Horizontal and vertical standard blade clips for Littelfuse ATO 257 series and Bussmann ATC series
- Holds fuse securely, even after multiple insertions
- Vertical maxi blade clips for Littelfuse MAXI series and Bussmann MAX series.
- Current Rating: 30 Amps or as noted

NEW FOR .110 x .032 MINI BLADE FUSES



.016 Brass, Tin Plate


• Low Profile

Vertical-Surface Mount


CAT. NO. 3563

CAT. NO. 3563TR


(On Tape & Reel)



Pad Layout For Two Clips




FOR .110 x .032 MINI BLADE FUSES





.012 Brass, Nickel Plate

CAT. NO. 3544 - Vertical




Mounting Detail For Two Clips




.012 Brass, Nickel Plate

CAT. NO. 3549 - Horizontal



Mounting Detail For Two Clips



FOR .205 x .025 STANDARD BLADE FUSES




.016 Brass, Tin Plate


• Low Profile

Vertical-Thru Hole Mount

CAT. NO. 3564




Mounting Detail For Two Clips





.016 Brass, Nickel Plate

Current Rating: 40 Amps

CAT. NO. 3522 - Vertical




Mounting Detail For Two Clips




.012 Brass, Nickel Plate

Current Rating: 40 Amps


CAT. NO. 3550 - Horizontal

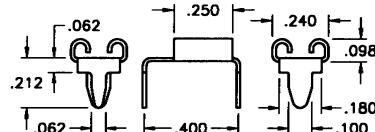

Mounting Detail For Two Clips



NEW FOR .312 x .032 MAXI BLADE FUSES




.020 Copper, Nickel Plate


Current Rating: 80 Amps

Vertical

CAT. NO. 3555



Mounting Detail For Two Clips




MALE/FEMALE STANDOFFS

FOR PC/104 & PC/104-PLUS MODULES



Brass



Nylon

CAT. NO.	A	MATERIAL
8799	.250	Brass, Nickel Plate
4799	.187	Nylon 6/6

PC SCREW TERMINAL

EXTENDED

SPECIFICATIONS


Rated: 15 Amps

Terminal:


.032 Thick Brass, Tin Plate

Binding Head Screw:

Brass, Nickel Plate



Mounting Detail



CAT. NO. 7697 (Screw Supplied Unassembled)


CAT. NO. 7699 (Screw Captivated)

CAT. NO. 7789 (Supplied Less Screw)

METRIC - "SNAP-IN" PC SCREW TERMINALS




Mounting Detail



CAT. NO. 7689 (Screw Supplied Unassembled)

CAT. NO. 7695 (Screw Installed & Captivated)

CAT. NO. 7790 (Supplied Less Screw)

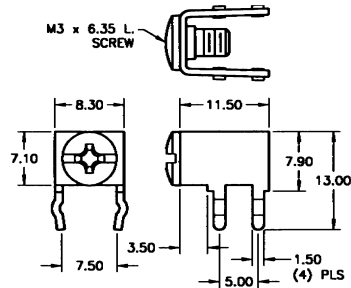

SPECIFICATIONS


Rated: 15 Amps

Terminal:


0.81 Thick Brass, Tin Plate

Binding Head Screw:

Brass, Nickel Plate



Mounting Detail



CAT. NO. 7698 (Screw Supplied Unassembled)

CAT. NO. 7696 (Screw Installed & Captivated)

CAT. NO. 7788 (Supplied Less Screw)

HORIZONTAL

VERTICAL

NOTE: All dimensions are in millimeters



31-07 20th Road • Astoria, New York 11105-2017 • (718) 956-8900 • FAX (718) 956-9040

e-mail: kec@keyelco.com • WebSite: keyelco.com