


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS				
G	14			ZONE	LTR	DESCRIPTION	DATE	APPD
					B	REV PER 0G3A-0001-03	07JAN03	JR TM


<b>AMP</b> WIRE RANGE	Listed	Certified
22-18 AWG STRANDED	22-18 AWG STRANDED	22-18 AWG STRANDED

**METRIC**  
 DIMENSIONS LISTED IN mm [ INCHES ]

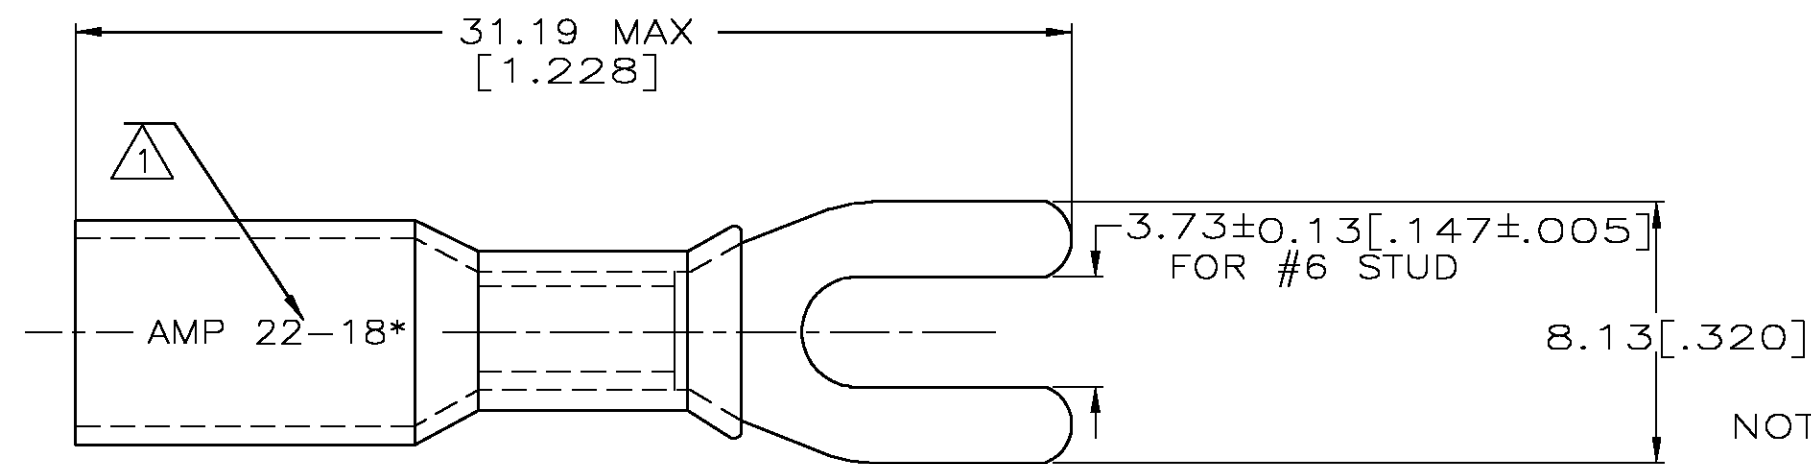

NOTES:

- STAMP AMP 22-18\* APPROX AS SHOWN
- WIRE INSULATION DIA 4.32mm [.170] MAX
- TONGUE MATERIAL THICKNESS 0.76±0.05mm [.030±.002]

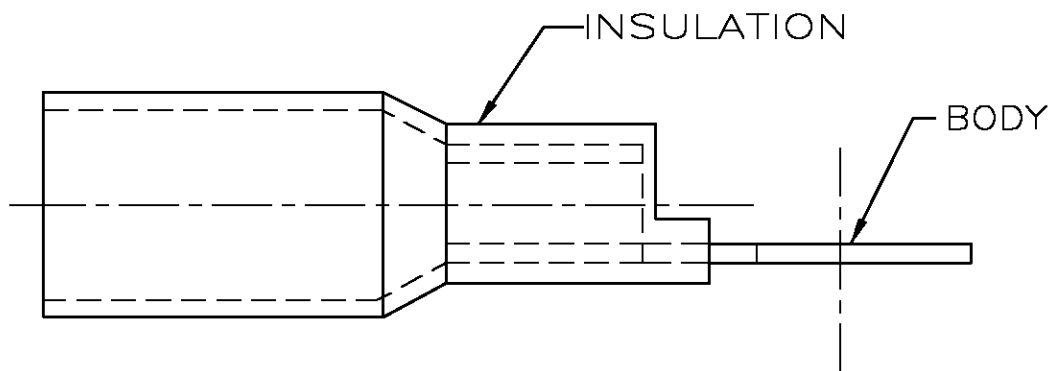

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 125° C MAX	DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.20[.008] 3 PLC DEC ± - ANGLES ± -	DR 6/93 S S GOULDEN	50	LOOSE PIECE	8-55866-2	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 600 MAX	MATERIAL	CHK 6/93 R HERSEY	1000	LOOSE PIECE	55866-1	
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 0.26-0.96mm <sup>2</sup> [509-1900] STRANDED	BODY: ETP COPPER INSULATION: POLYOLEFIN COLOR: RED	APPD 6/93 B BARE	QTY	PACKAGE TYPE	PART NO	
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	FINISH	APPD 6/93 M ELLIS		<b>AMP</b> AMP Incorporated Harrisburg, PA 17105-3608		
			EDP TIN PLATED		PRODUCT SPEC		NAME TERMINAL, SPADE TONGUE, SEALABLE HEAT SHRINKABLE	
				APPLICATION SPEC		SIZE	CAGE CODE	DRAWING NO
				WEIGHT		<b>B</b>	00779	<b>C</b> -55866
						SCALE	NTS	SHEET 1 OF 1