


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS				
G	14			ZONE	LTR	DESCRIPTION	DATE	APPD
					B	REV PER 0G3A-0001-03	07JAN03	JR TM


AMP WIRE RANGE	Listed	Certified
22-18 AWG STRANDED	22-18 AWG STRANDED	22-18 AWG STRANDED

METRIC
 DIMENSIONS LISTED IN mm [INCHES]

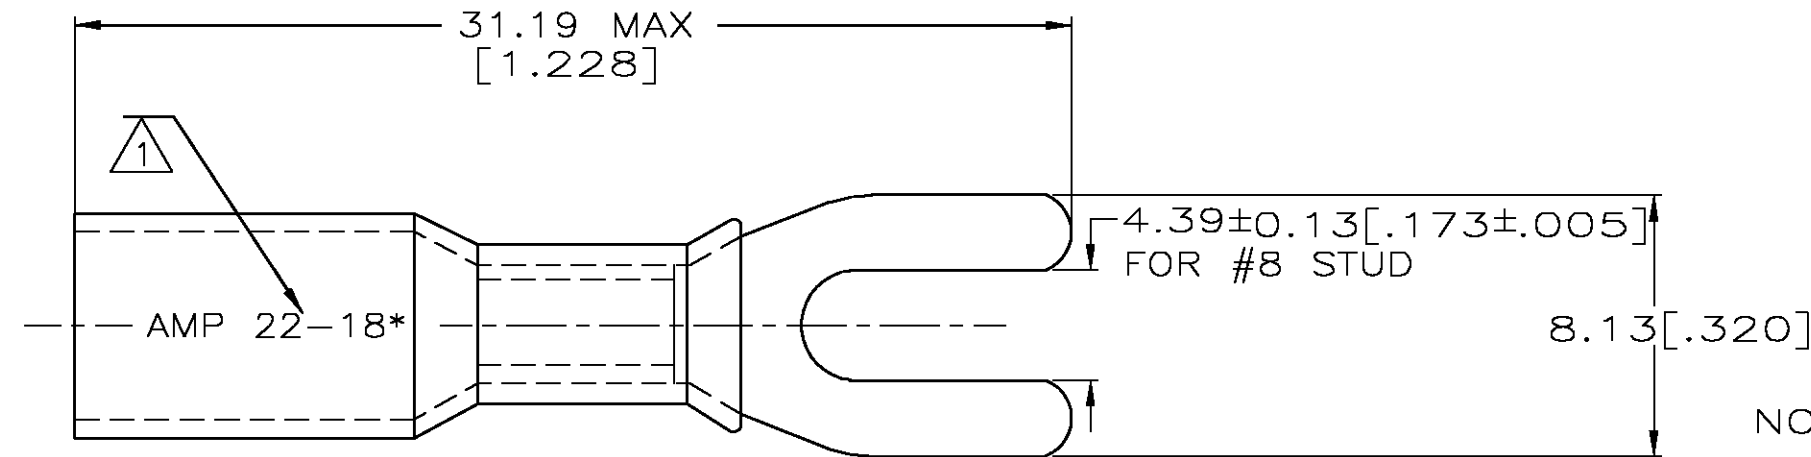

NOTES:

- 1 STAMP AMP 22-18* APPROX AS SHOWN
- 2. WIRE INSULATION DIA 4.32mm [.170] MAX
- 3. TONGUE MATERIAL THICKNESS 0.76±0.05mm [.030±.002]

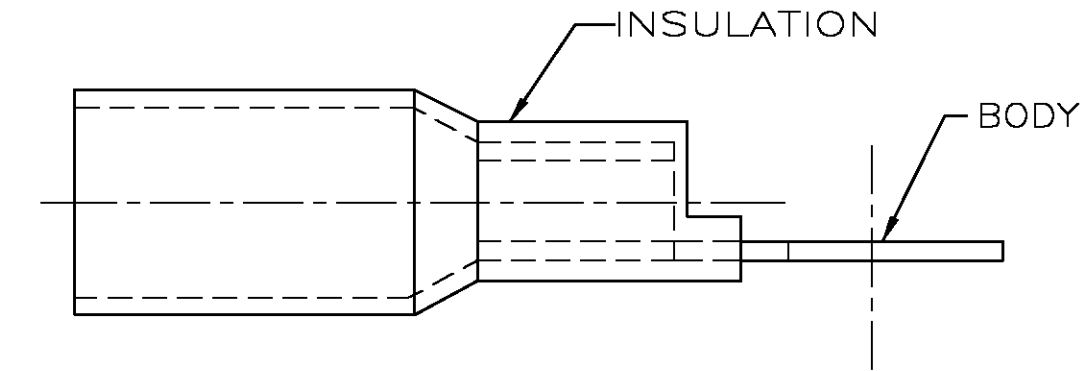

50	LOOSE PIECE	8-55867-2
1000	LOOSE PIECE	55867-1
QTY	PACKAGE TYPE	PART NO
DR 6/93 S S GOULDEN	AMP AMP Incorporated Harrisburg, PA 17105-3608	
CHK 6/93 R HERSEY		
APPD 6/93 B BARE	NAME	
APPD 6/93 M ELLIS	TERMINAL, SPADE TONGUE, SEALABLE HEAT SHRINKABLE	
PRODUCT SPEC	SIZE B	CAGE CODE 00779
APPLICATION SPEC	DRAWING NO C-55867	
WEIGHT -	SCALE NTS	SHEET 1 OF 1

**AMP INCORPORATED
 CUSTOMER SERVICE SYSTEMS**

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE:
125° C MAX

VOLTAGE RATING:
600V MAX

CIRCULAR MIL AREA:
0.26-0.96mm² [509-1900]
STRANDED

DO NOT SCALE PRINT.
UNLESS SPECIFIED

~~DIMENSIONS IN mm [INCHES]~~

TOLERANCES ON:

2 PLC DEC ± 0.20[.008]

3 PLC DEC ± -

ANGLES ± -

MATERIAL

BODY: ETP COPPER

INSULATION: POLYOLEFIN

COLOR: RED

FINISH

EDP TIN PLATED

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.