


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS			DATE	APPD
G	14			ZONE	LTR	DESCRIPTION		
					B	REV PER 0G3A-0001-03	07JAN03	JR ME


<b>AMP</b> WIRE RANGE	Listed	Certified
12-10 AWG STRANDED	12-10 AWG STRANDED	12-10 AWG STRANDED

**METRIC**  
 DIMENSIONS LISTED IN mm [ INCHES ]

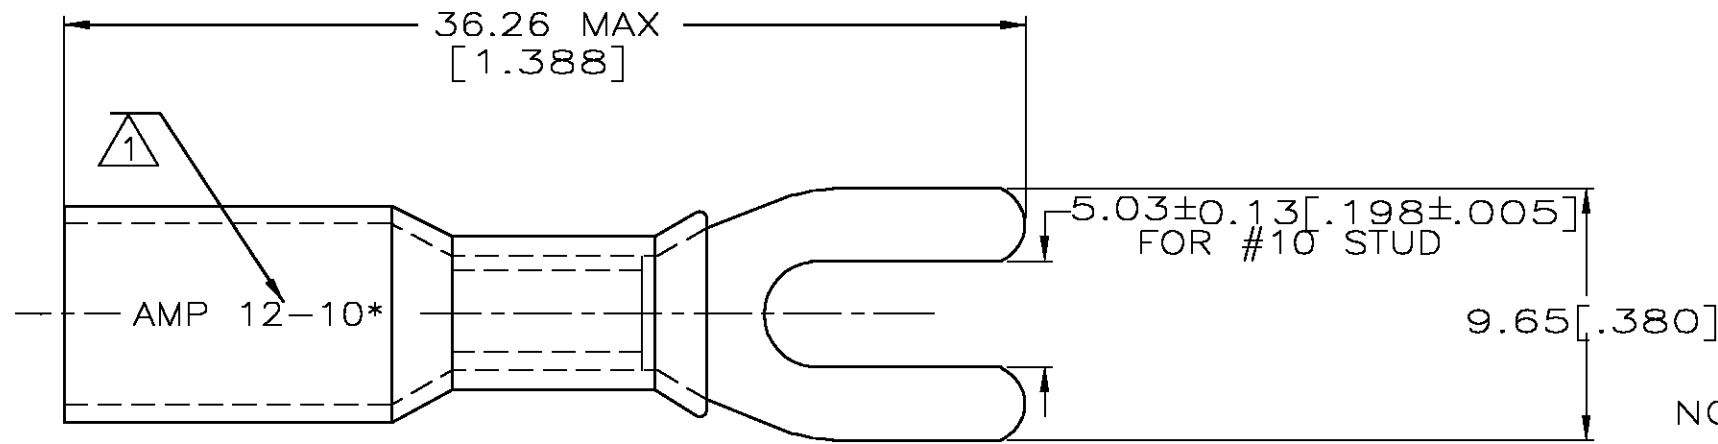

NOTES:

- 1 STAMP AMP 12-10\* APPROX AS SHOWN
2. WIRE INSULATION DIA 6.10mm [.240] MAX
3. TONGUE MATERIAL THICKNESS 0.81±0.05mm [.032±.002]

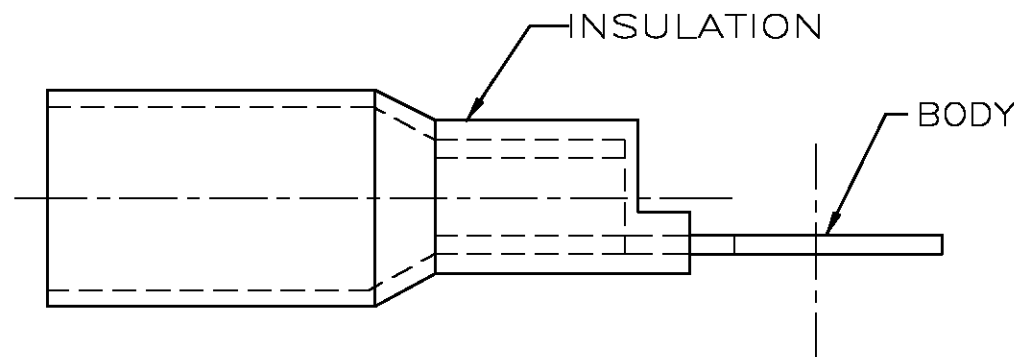

**AMP INCORPORATED  
 CUSTOMER SERVICE SYSTEMS**

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING  
TEMPERATURE:

125° C MAX

VOLTAGE RATING:  
600 MAX

CIRCULAR MIL AREA:  
2.62-6.64mm[5180-13100]  
STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT FOR  
AMP INCORPORATED. IT IS SUBJECT TO CHANGE  
AND THE CONTROLLING ENGINEERING ORGANIZATION  
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT.  
UNLESS SPECIFIED  
DIMENSIONS IN mm [INCHES]  
TOLERANCES ON:  
2 PLC DEC ± 0.20[.008]  
3 PLC DEC ± -  
ANGLES ± -

MATERIAL  
BODY: ETP COPPER  
INSULATION: POLYOLEFIN  
COLOR: YELLOW

FINISH  
EDP TIN PLATED

25	LOOSE PIECE	8-55873-3
500	LOOSE PIECE	55873-1
QTY	PACKAGE TYPE	PART NO
DR 6/93 S S GOULDEN	<b>AMP</b> AMP Incorporated Harrisburg, PA 17105-3608	
CHK 6/93 R HERSEY	NAME	
APPD 6/93 B BARE	TERMINAL, SPADE TONGUE, SEALABLE HEAT SHRINKABLE	
APPD 6/93 M ELLIS	SIZE	CAGE CODE
PRODUCT SPEC	B	00779
APPLICATION SPEC	DRAWING NO C-55873	
WEIGHT -	SCALE	SHEET
	NTS	1 OF 1