


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14						
			5	REDRAWN PER 0G3A-0439-02	24JUL02	JR	TM

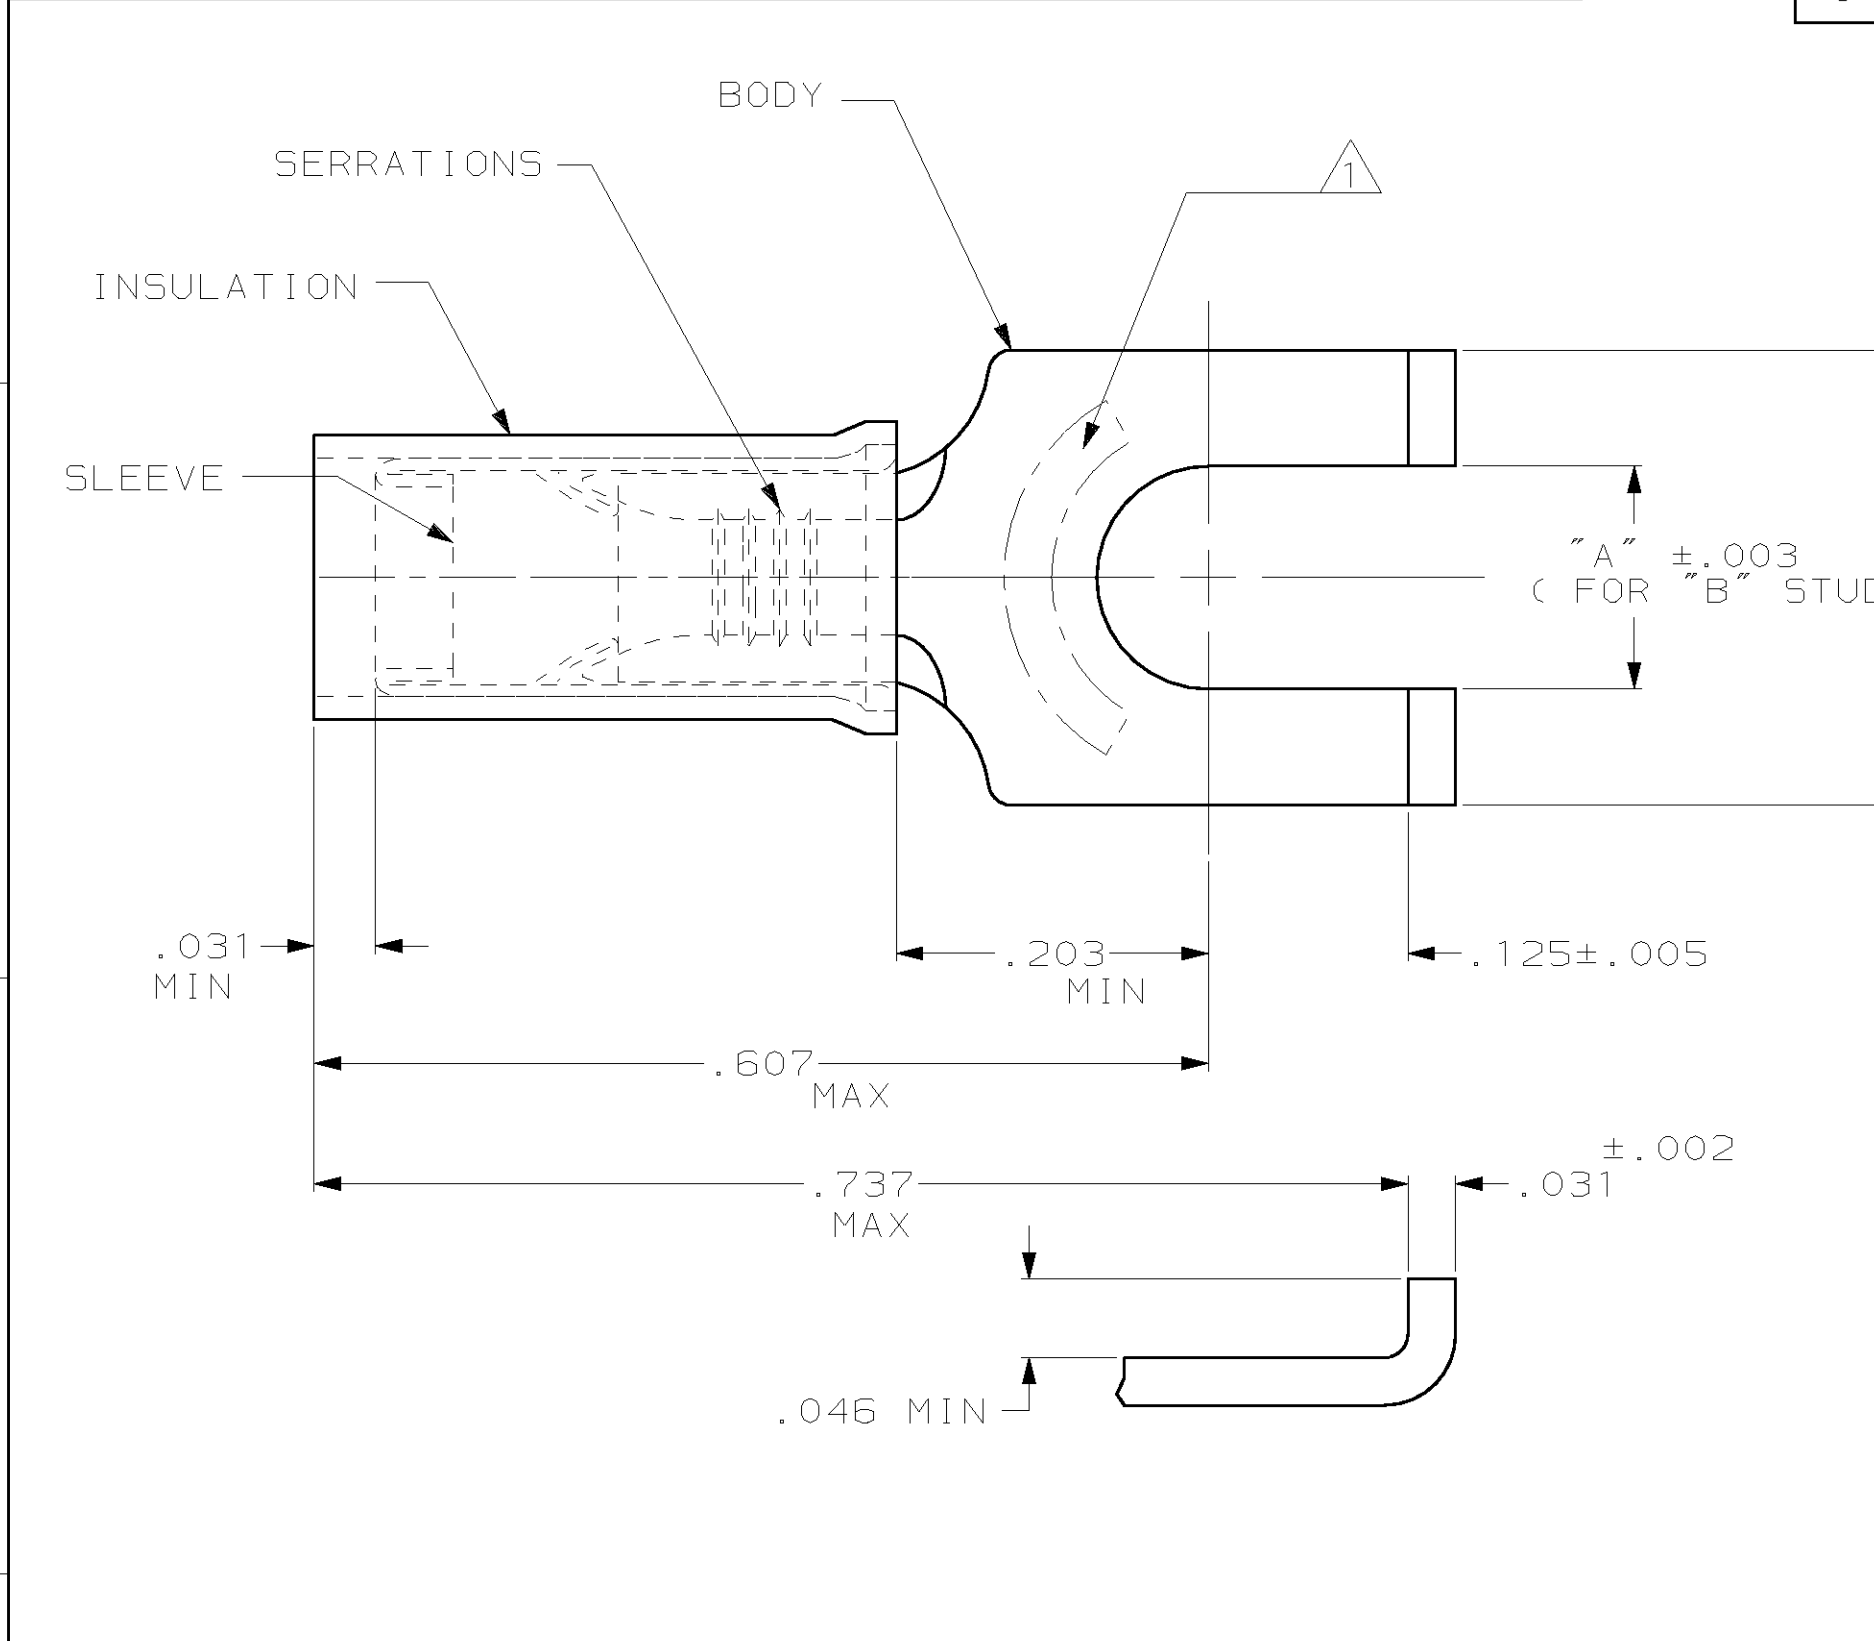

AMP WIRE RANGE	UL Listed	SR LR7189 Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED

1 STAMP AMP 22-18* APPROX AS SHOWN
 22-16 TERMINALS ARE STAMPED 22-18
 IN ACCORDANCE WITH MILITARY SPEC
 MIL-T-7928, COMMERCIAL WIRE RANGE
 IS 22-16.
 2 WIRE INSULATION DIA IS .105-.140

QTY	"B"	"A"	DESCRIPTION	PART NO.
100	#6	.145	LOOSE PIECE, BOX	8-32562-1
5000	#8	.171	ON TAPE, REEL	2-32562-3
-	#8	.171	LOOSE PIECE	2-32562-2
5000	#6	.145	ON TAPE, REEL	2-32562-1
-	#6	.145	LOOSE PIECE	32562

**AMP INCORPORATED
 CUSTOMER SERVICE SYSTEMS**

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE:
105°C MAX

VOLTAGE RATING:
300 V MAX

WIRE CROSS SECTIONAL AREA RANGE:
0.26-1.65mm² [509-3,260] CIR MILS
SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS, INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ±-
	1 PLC ±-
	2 PLC ±-
	3 PLC ±.008
	4 PLC ±-
	ANGLES ±-

MATERIAL
BODY & SLEEVE:
COPPER PER ASTM B152
INSULATION: NYLON-RED

FINISH
BODY: TIN PLATE PER
ASTM B545

DWN JR RUTH 24JUL02
 CHK T MICHIELUTTI 24JUL02
 APVD T MICHIELUTTI 24JUL02
 PRODUCT SPEC
 APPLICATION SPEC
 WEIGHT -

AMP AMP Incorporated
 Harrisburg, PA 17105-3608

NAME
**WIRE TERMINAL, PIDG,
 FLANGED SPADE, 22-16 AWG**

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C- 32562	-

CUSTOMER DRAWING SCALE 8:1 SHEET 1 OF 1 REV 5