


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES :

1. UL LISTED AND CSA CERTIFIED AFTER HEAT SHRINKING FOR:
 - A. 600 V MAX. VOLTAGE RATING
 - B. 257°F (125°C) MAX. TEMP. RATING
 - C. STRANDED COPPER WIRE ONLY (SEE CHART FOR WIRE RANGE)
2. MATERIAL :
 - A. TERMINAL - TIN PLATED COPPER WITH BRAZED SEAM
 - B. INSULATOR - HEAT SHRINKABLE POLYOLEFIN WITH HOT MELT SEALANT
3. MINIMUM SHRINK TEMPERATURE: 300°F (150°C)
4. ALL DIMENSIONS SHOWN ARE NOMINAL. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.
5. INSTALLATION TOOL: CT-310
6. PACKAGING QTY:

STD. -Q	= 25	-E	= 20
BULK -D	= 500	-T	= 200

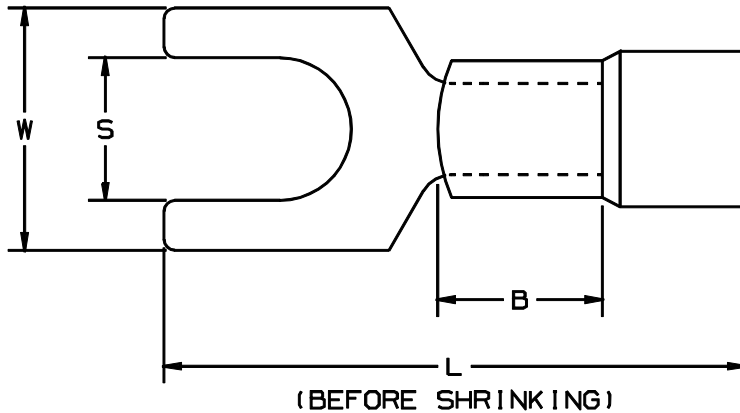

LISTED
12D0



CERTIFIED
73971

PANDUIT PART NUMBER		WIRE RANGE (AWG)	STUD SIZE S	DIMENSIONS			MAX WIRE INSULATION DIA	INSULATION COLOR
PREFIX	PKG			B	W	L		
PH18-6F	-Q -D	22-18	#6	.250 (6.35)	.32 (8.13)	1.04 (26.42)	.170 (4.32)	RED
PH18-8F	-Q -D	22-18	#8	.250 (6.35)	.32 (8.13)	1.04 (26.42)	.170 (4.32)	RED
PH18-10F	-Q -D	22-18	#10	.250 (6.35)	.32 (8.13)	1.04 (26.42)	.170 (4.32)	RED
PH14-6F	-Q -D	16-14	#6	.250 (6.35)	.38 (9.65)	1.07 (27.18)	.190 (4.83)	BLUE
PH14-8F	-Q -D	16-14	#8	.250 (6.35)	.38 (9.65)	1.07 (27.18)	.190 (4.83)	BLUE
PH14-10F	-Q -D	16-14	#10	.250 (6.35)	.38 (9.65)	1.07 (27.18)	.190 (4.83)	BLUE
PH10-8F	-E -T	12-10	#8	.250 (6.35)	.38 (9.65)	1.20 (30.48)	.240 (6.10)	YELLOW
PH10-10F	-E -T	12-10	#10	.250 (6.35)	.38 (9.65)	1.20 (30.48)	.240 (6.10)	YELLOW

A41455_02

02	7/01	JAMB		ADDED PACKAGING QUANTITIES TO TABLE AND NOTES.					 TINLEY PARK, ILLINOIS HEAT SHRINK INSULATED FORK TERMINALS		
01	1/01	RM	SKB	FILESPEC WAS NPC-A41455-00	08937	TRO	JAC				
00	12/90	DL	SKB	RELEASED	00221	DH	LCA				
REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST	DRAWN BY DRL	CHK'D DRL	SCALE NONE	DRAWING NO. A41455