

NOTES:


- ① MAT'L: COPPER (STOCK TRN. $\frac{028}{71}$)
- ② PLATING: ELECTRO TIN (.0003 MIN)
- ③ TIN-PLATED BRASS FUNNEL FERRULE
- ④ NYLON INSULATION (COLOR CODED RED)

STUD SIZES: (.005)

- 02 = .094
- 04 = .119
- 06 = .146
- 08 = .173
- 10 = .198
- 14 = .265
- 56 = .328
- 38 = .390

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$

(MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

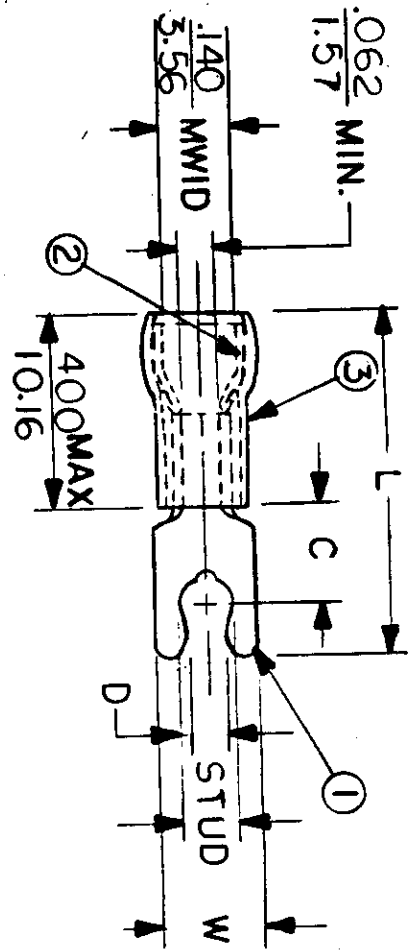

"UL" LISTING # E32244
 "CSA" LISTING # 18689

WIRE SIZE: 22 - 18 AWG
 .25 - 1.5 MM²

PART NUMBER	"W" MIN.	"C" MIN.	"L" MAX.	"D" ±.005	AVAILABLE STUD SIZES	DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		REFERENCE	SCALE:	NTS	DATE	TITLE:	DWG. NO.	CUSTOMER DWG
						FRAC.	DEC.							
AA-8704-	$\frac{.250}{6.35}$	$\frac{.230}{5.84}$	$\frac{.810}{20.57}$	$\frac{.105}{2.67}$	05 ($\frac{.127}{3.23}$)						11.8.84	SNAP SPADE SHORT TONGUE TERMINAL AVIKRIMP	A	
AA-8704-	$\frac{.250}{6.35}$	$\frac{.230}{5.84}$	$\frac{.810}{20.57}$	$\frac{.114}{2.90}$	06						11.14.84			

