


NOTES:

- ① MAT'L: COPPER (STOCK TKN. $\pm .040$)
PLATING: ELECTRO TIN (.0003 MIN)
 - ② TIN-PLATED BRASS FUNNEL FERRULE
 - ③ NYLON INSULATION (COLOR CODED YELLOW)
- STUD SIZES: ($\pm .005$)
- 02 = .094
 - 04 = .119
 - 06 = .146
 - 08 = .173
 - 10 = .198
 - 14 = .265
 - 56 = .328
 - 38 = .390

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$

(MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

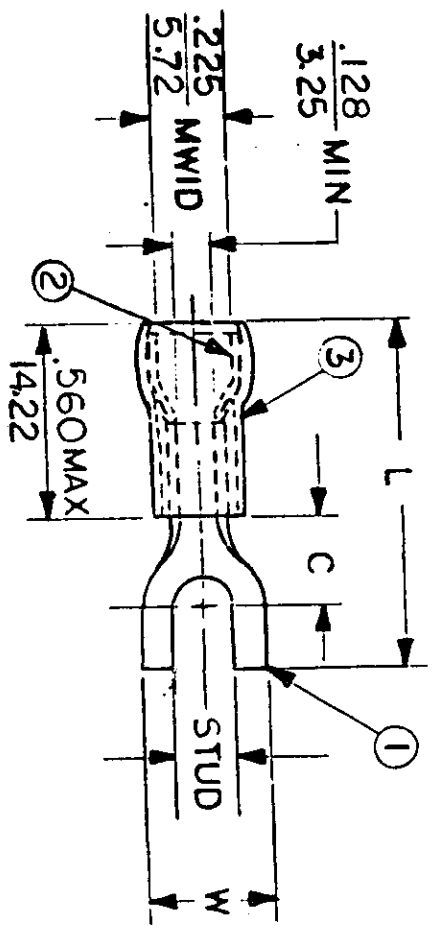

"UL" LISTING #E32244
"CSA" LISTING #18689

WIRE SIZE: 12 - 10 AWG
4.0 - 6.0 MM²

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	AVAILABLE STUD SIZES	REFERENCE		SCALE: NTS		DATE	TITLE:
					DRWN. BY:	CHKD. BY:	APPRD. BY:	DATE		
C-841-	$\frac{.375}{9.53}$	$\frac{.301}{7.65}$	$\frac{1.118}{28.40}$	06,08,10	JJ	GZ		11.12.84	SPADE TONGUE TERMINAL AVIKRIMP 800-SERIES	
C-868-	$\frac{.533}{13.54}$	$\frac{.393}{9.98}$	$\frac{1.271}{32.28}$	10,14,56				11.26.84		
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED					FRAC.		DEC.		ANG.	
					±		±		±	

FILE NO.

C-CD-803-02



DWG. NO. A CUSTOMER DWG