

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
G	14	H	REVISE&REDRAW ON CAD/OL20-0142-97	29AUG97	ME SB		

- 1 WIRE INSULATION DIA 1.17-2.29 [.046-.090]
- △2 COPPER PER ASTM B 152
- △3 TIN PLT PER ASTM B 545

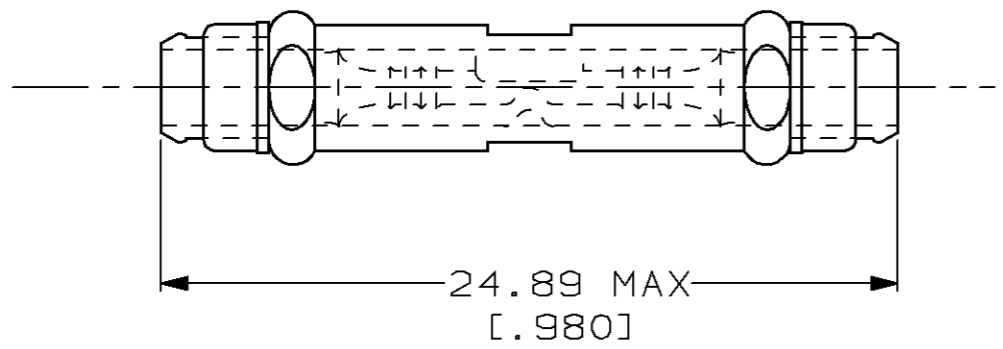

25	LOOSE PIECE	324544
QTY	PACKAGE TYPE	PART NUMBER

AMP INCORPORATED  
 CUSTOMER SERVICE SYSTEM

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS  
 PRODUCT INFORMATION CENTER  
 1-800-522-6752

FOR APPLICATION TOOLING INFORMATION  
 TOOLING ASSISTANCE CENTER  
 1-800-722-1111

FOR ORDER ENTRY  
 1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE:  
 -

VOLTAGE RATING:  
 -

CIRCULAR MIL AREA:  
 - - - -

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±-
	1 PLC ±-
	2 PLC ±-
	3 PLC ±-
	4 PLC ±-
	ANGLES ±-

MATERIAL RING & BODY △2 SLEEVE, NYLON, NAT

FINISH RING & BODY △3

DWN M ELLIS	AMP Incorporated		
CHK S BORTNER	Harrisburg, PA 17105-3608		
APVD C FOX	NAME ASSEMBLY, SPLICE, BUTT, CERTI-SEAL™, 24-20 AWG		
PRODUCT SPEC	SIZE A3	CAGE CODE 00779	DRAWING NO C-324544
APPLICATION SPEC	RESTRICTED TO		
WEIGHT -	CUSTOMER DRAWING		SCALE 4:1
	SHEET 1 OF 1		REV H