

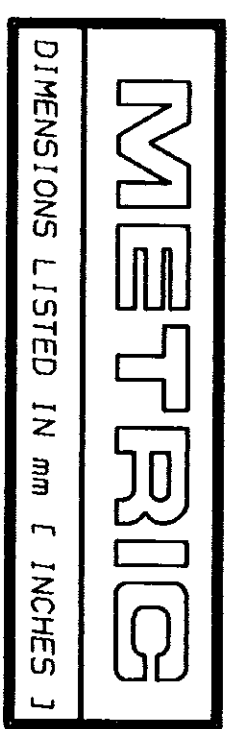


LOC	Q15*	P	F	ZONE	LTR	REV, RDRW, & SM PKG PER 0720-0040-93	DATE	APPD
G	14			B		REV, RDRW, & SM PKG PER 0720-0040-93	2-24-93	18 DAP

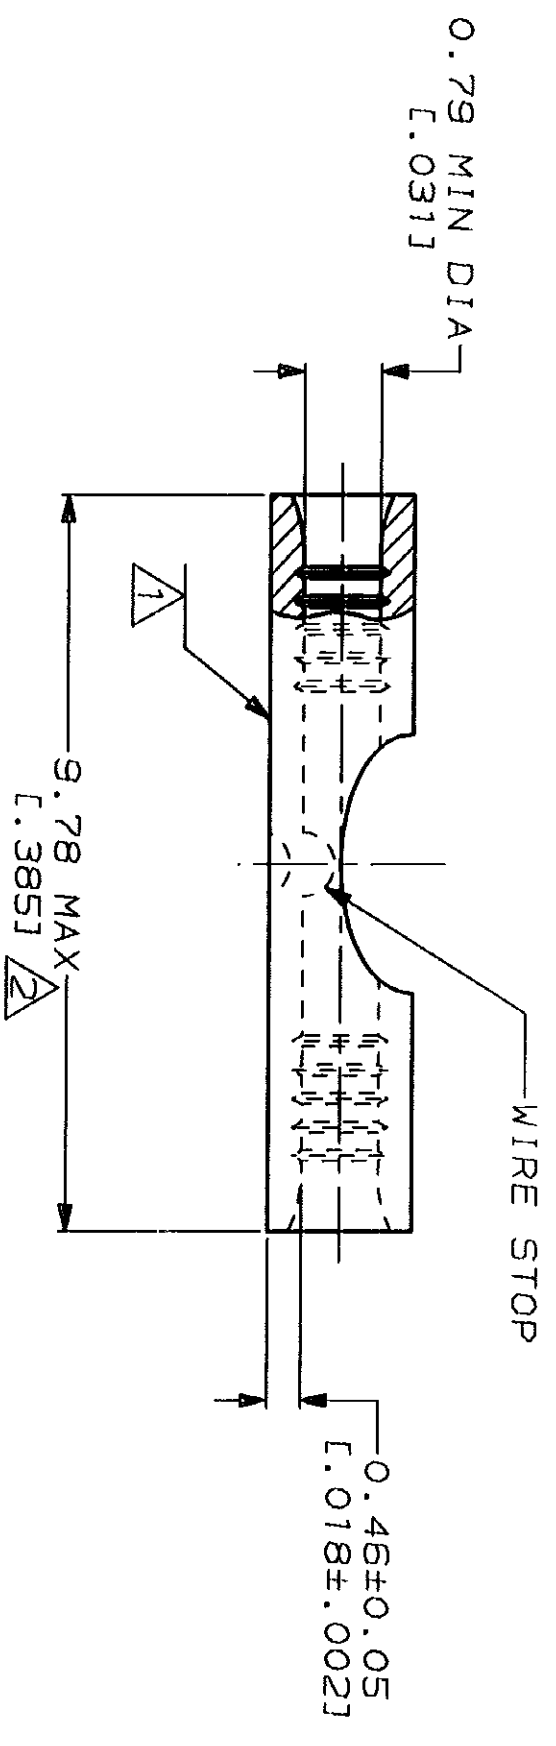

AMP WIRE RANGE	IL E13288 Listed
26-22 AWG SOLID OR STRANDED	NOT LISTED
LR7189 Certified	MILITARY P/N AND CLASS
NOT CERTIFIED	NOT APPLICABLE

- 1 STAMP AMP APPROX AS SHOWN
- 2 MAXIMUM LENGTH DOES NOT INCLUDE MANUFACTURING TABS

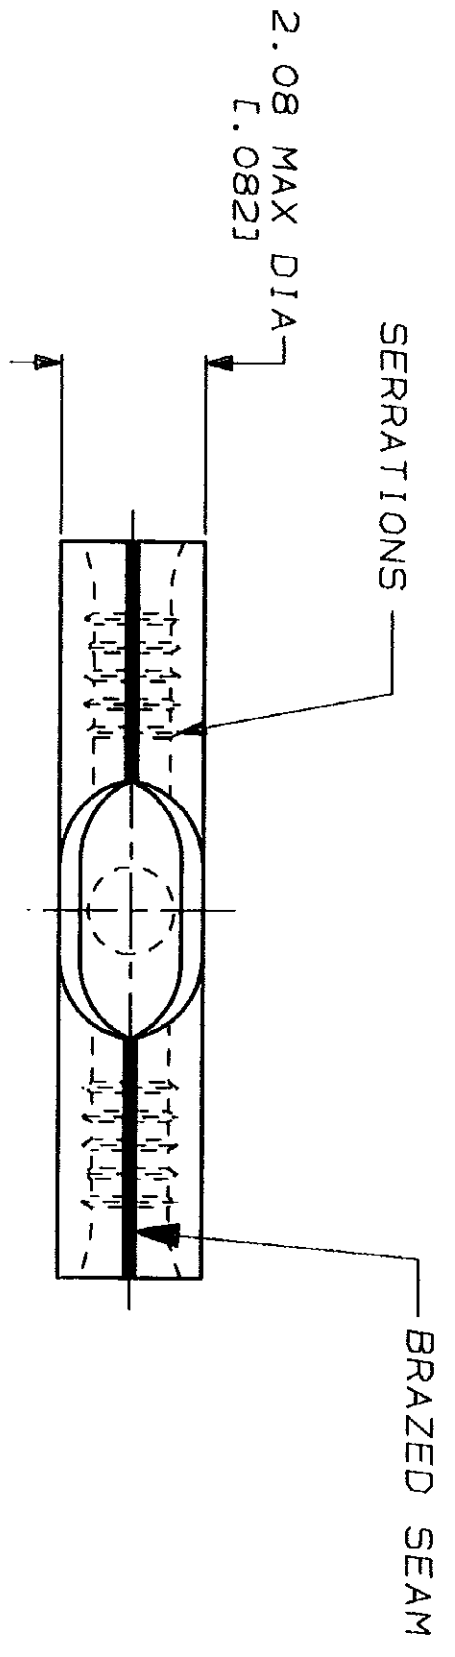

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 0.1-0.41mm² [202-810] CIR MILS SOLID OR STRANDED
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON:	DR 2-24-93 TA BRINKMAN
1 2 PLG DEC ±	CHK 2-24-93 DA PATTERSON
3 PLG DEC ±	APPD 2-24-93 DE MILLER
MATERIAL	APPD 2-24-93 JI MECKLEY
COPPER PER ASTM B-152 ANNEALED	PRODUCT SPEC
FINISH TIN PLATE	APPLICATION SPEC
0.00254L [.000100] MIN THK PER MIL-T-10727	WEIGHT

100	LOOSE PIECE, BOX	8-321198-1
---	LOOSE PIECE	321198
QUANTITY	PACKAGE TYPE	PART NO

AMP AMP Incorporated
 Harrisburg, PA 17105-3608

NAME
 SPLICE, BUTT,
 STRAP, SOLISTRAND™

SIZE	CAGE CODE	DRAWING NO
SCALE 10:1	00779	321198
		SHEET 1 OF 1