
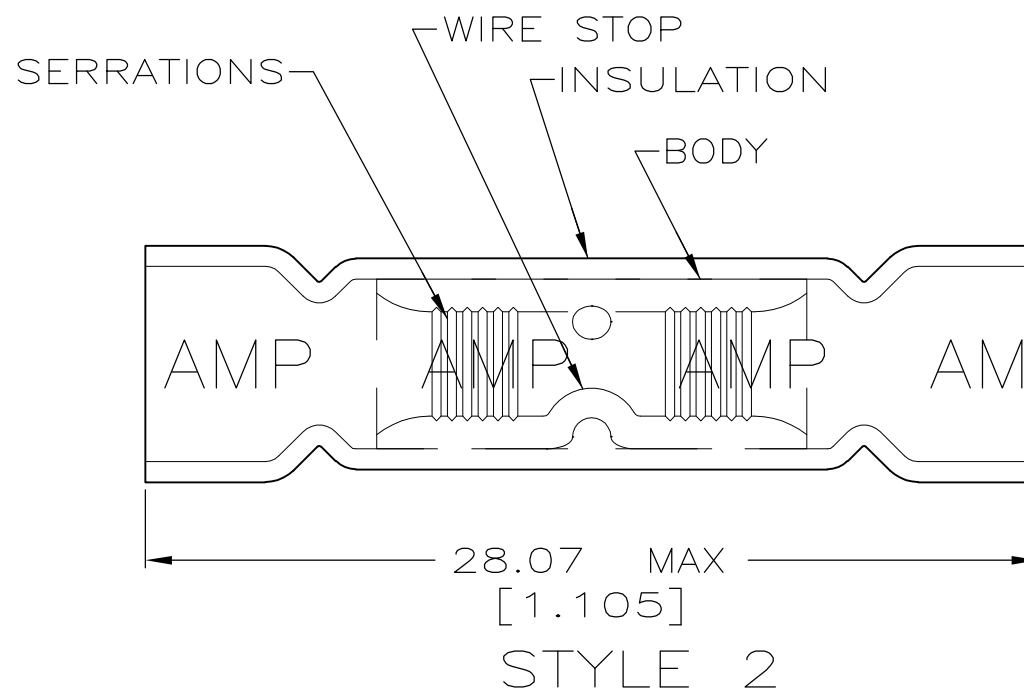


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
G	14	P	LTR	DESCRIPTION	DATE	DWN	APVD
			M2	REV PER ECR 08-003519	08FEB08	JR	TM

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

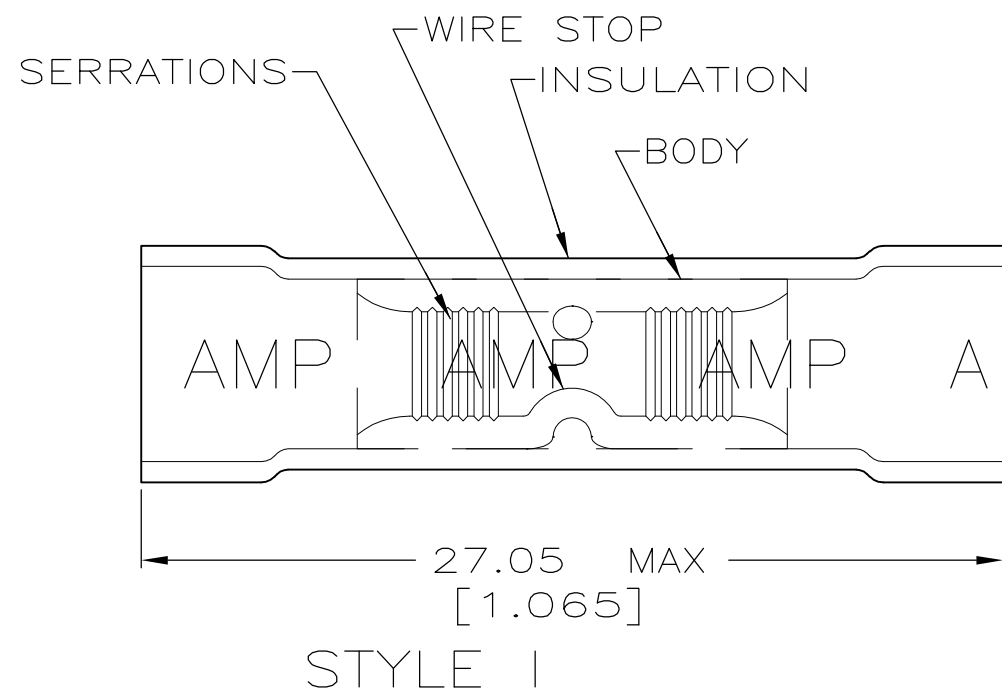

1. WIRE INSUL DIA,
2.92-4.32 [.115-.170]
- 2 TAPE, NO STICKY

1	50	LOOSE PIECE, BAG	8-34071-5
1	5	LOOSE PIECE, BLS	8-34071-4
1	100	LOOSE PIECE, BOX	8-34071-1
2	2500	ON TAPE, REEL	4-34071-4
2	2500	ON TAPE, REEL	2-34071-3
2	1000	LOOSE PIECE	2-34071-2
1	2500	ON TAPE, REEL	2-34071-1
1	1000	LOOSE PIECE	34071
STYLE	QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 90°C [194° F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M ELLIS 19JUL95	Tyco Electronics Corporation Harrisburg, PA 17105-3608					
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN)	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK C PRESNELL 19JUL95	NAME					
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 1.04-2.62mm² [2,050-5,180] SOLID OR STRANDED		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	APVD S BORTNER 19JUL95	SPLICE, BUTT, PLASTI-GRIP WIRE SIZE 16-14 AWG					
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	MATERIAL BODY, CU ASTM B 152 SLV, PVC, COLOR-BLUE	FINISH TIN PLATE ASTM B545	PRODUCT SPEC UL486A	APPLICATION SPEC	RESTRICTED TO				
					WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO G-34071	SCALE 4:1	SHEET 1 OF 1	REV M2
CUSTOMER DRAWING											