REV	ECN.NO:	B Y	DATE
..	... .	..	... .
..	... .	.....	... .

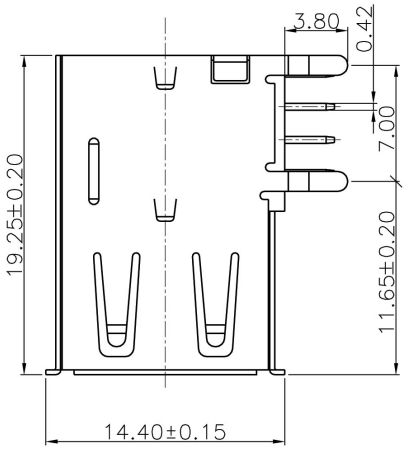

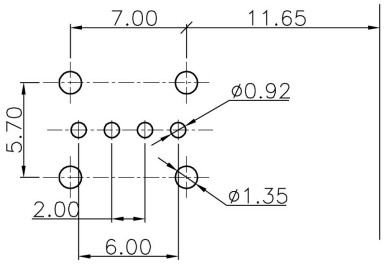

RECOMMENDED PCB LAYOUT

NOTE:
MATERIAL:
HOUSING:THERMOPLASTIC(PA6T)
COLOR:BLACK/WHITE/BROWN/BEIGE----
CONTACT: PHOSPHONE BRONZE
FRONT SHELL:BRASS
BACK SHELL:STEEL
PLATING:
CONTACT: GOLD PLATING CORD:1u"/3u"/5u"/10u"/15u"/30u"
SHELL: NICKEL PLATING
SPECIFICATION:
VOLTAGE RATING: 30V
CURRENT RATIN G: 1.5A
CONTACT RESISTANCE TERMINAL: 30mΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE:750V AC
INSULATION RESISTANCE:1000MΩ MIN
ENVIRONMENTAL:TEMPERATURE RANGE −55° C~+85° C

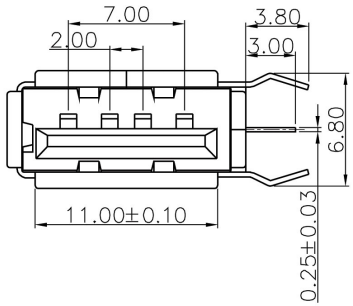

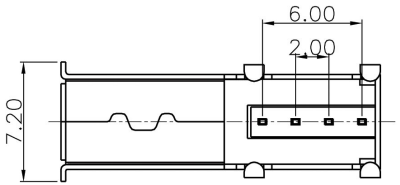

RoHS Compliant

-TOLERANCES- UNLESS OTHERWISE SPECIFIED		ASSMANN Electronics, Inc.					
			TITLE: USB, A VERSION, HORIZONTAL, DIP TYPE.				
X.X ±0.30	X.X° ±3°	APPD:	PRODUCT NO: A-USB-A-E-R				
X.XX ±0.15	X.XX° ±1°	CHECK:	DATE	SCALE	UNIT	TYPE	PAGE
X.XXX ±0.10	X.XXX° ±0.5°	DRAW:	2007.05.03	FREE	MM	Z	•