

1




2

3

4


A

A

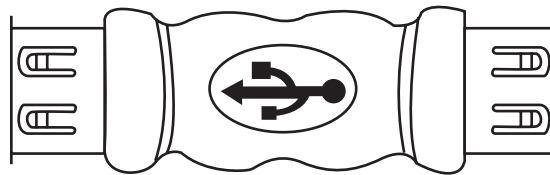

B

B

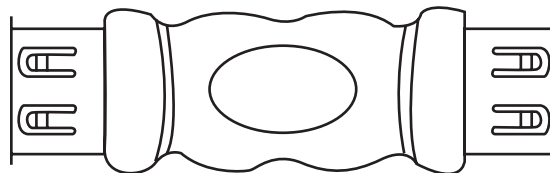


Remark:

- 1.Hook Up Wire:Non-UL 26AWG
- 2.Connector: P1&P2: USB A Female Gold Flash Contact; Nickel Plated Shell
Plastic:White
- 3.Inner Mold with Copper Foil
- 4.Hood: Molded Type PVC 45P Color: Beige(NK-A03)
- 5.Electrical Test: A.100% Open Short & Mis Wire Test
B. Contact Resistance 3 Ohm Max
C. Insulation Resistance 20m Ohm min
- 6.Packing:See P-0039 Rev. C Packing Drawing+EAN Code
EAN-Code:4016032052692

PIN Out
(P1)

(P2)

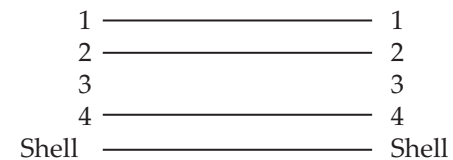

C

C

Description

Name :
A - USB - 4
USB Adaptor (A/F-A/F)

D

D



THIS DRAWING IS UNPUBLISHED

© Copyright 2005 by Assmann Electronic Components All International Rights Reserved

This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.

1

2

3

4