




| PERFORMANCE SPECIFICATION | MIN | TYP | MAX | UNITS |
|--|------|------|------|--------------------|
| Lower Frequency: | | | 1650 | MHz |
| Upper Frequency: | 2150 | | | MHz |
| Tuning Voltage: | 0.5 | | 4.5 | VDC |
| Supply Voltage: | 4.75 | 5.0 | 5.25 | VDC |
| Output Power: | +2.0 | +5.0 | +8.0 | dBm |
| Supply Current: | | 15 | 22 | mA |
| Harmonic Suppression (2 nd Harmonic): | | -15 | -10 | dBc |
| Pushing: | | | 2.5 | MHz/V |
| Pulling, all Phases: | | | 20 | MHz pk-pk |
| Tuning Sensitivity: | | 160 | | MHz/V |
| Phase Noise @ 10kHz offset: | | -95 | | dBc/Hz |
| Phase Noise @ 100kHz offset: | | -117 | | dBc/Hz |
| Load Impedance: | | 50 | | Ω |
| Input Capacitance: | | | 27 | pF |
| Operating Temperature Range: | -40 | | +85 | $^{\circ}\text{C}$ |
| Storage Temperature Range: | -45 | | +90 | $^{\circ}\text{C}$ |

Phase Noise (1 Hz BW, Typical)

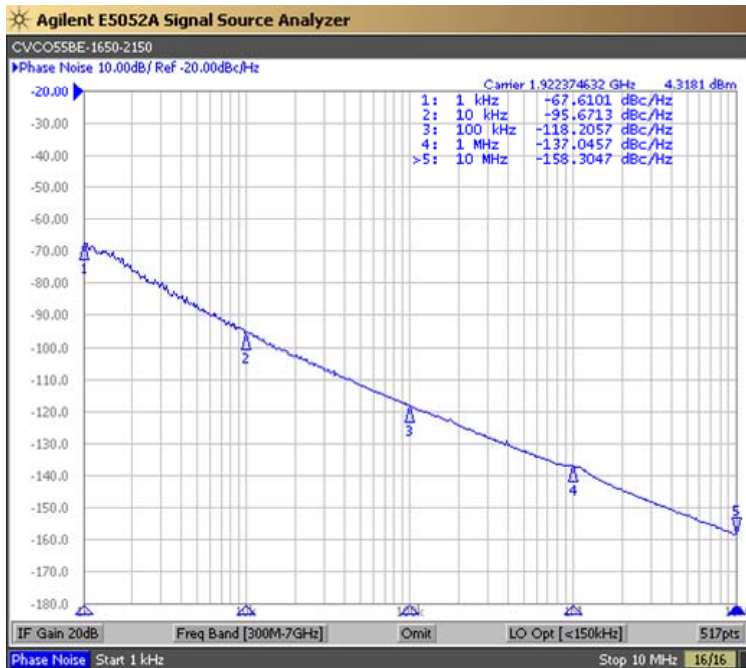

Tuning Curve (Typical)

