


**Features:**

- Stable frequency over temperature
- Good SSBN Noise performance
- Surface mountable package

**Description and Applications:**

Surface mount 3.2 x 5 mm Voltage Control Temperature Compensated Crystal Oscillator (VCTCXO) for use in 3G, GSM, TDMA, CDMA, PDAs, Satellite handsets, 2-way radios, Pagers, Analog applications, and other portable electronics requiring a stable frequency source.

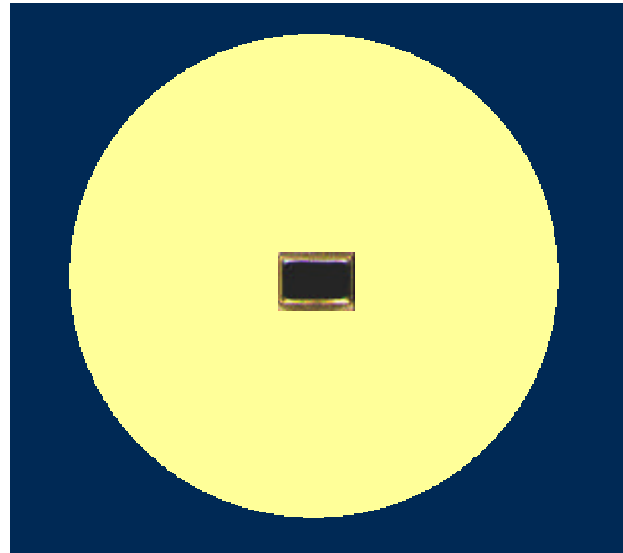

**Electrical Specifications:**

OSC1604A	Specification
Nominal Frequency	26.0 MHz
Supply Voltage (Vdd)	2.75 V ± 0.1 V
Frequency Stability over Temperature	± 3.0 PPM (-20 C to 70C)
RF output (AC Coupled)	0.6 Vpp (minimum) Clipped Sinewave
Current Drain	1.5 mA maximum
Frequency Adjust Method	Analog DC Frequency Adjust
Frequency Adjust Center Voltage (Vcc)	1.30 VDC
Frequency Adjust Range	± 9.0 PPM to ± 16.0 PPM (1.30 V ± 1.0 V )
SSBN @ 16.8MHz at 10kHz offset	-140dBc/Hz Typical
Aging	± 1PPM/Yr @25C

Mechanical Dimensions (mm):

