


**CVPD-940 Model**  
9X14 mm SMD, **3.3V, LVPECL**



# Differential LVPECL VCXO

<b>Frequency Range:</b>	50MHz to 250MHz
<b>Temperature Range:</b> (Option X)	0°C to 70°C -40°C to 85°C
<b>Storage:</b>	-55°C to 120°C
<b>Input Voltage:</b>	3.3V ± 0.3V
<b>Control Voltage:</b>	1.65V ± 1.65V
<b>Settability At Nominal:</b>	1.65V ± 0.25V
<b>Input Current:</b>	88mA Max
<b>Output:</b>	Differential LVPECL
Symmetry:	49/51% Typ, 45/55% Max
Rise/Fall Time:	550ps Max @ 20% to 80% Vcc
Pullability APR:	±50ppm Min.
Linearity:	± 10% Max
Load: Terminated to Vdd-2V into 50 ohms	
Logic "1" Level:	Vcc-0.96V Min, Vcc-0.81V Max
Logic "0" Level:	Vcc-1.85V Min, Vcc-1.65V Max
Disable Time:	100ns Max
Start-up time:	2ms Typ., 10ms Max
<b>Modulation BW:</b>	>10KHz @ -3dB
<b>Sub-harmonics:</b>	none
<b>Period Jitter:</b> (20,000 periods)	<5ps RMS (1-sigma) Max
<b>Phase Jitter:</b> 12KHz~20MHz	<1ps RMS (1-sigma) Max,
50KHz~80MHz	<1ps RMS (1-sigma) Max,
<b>Phase Noise Max:</b>	
100Hz	-80 dBc/Hz
1KHz	-108 dBc/Hz
10KHz	-132 dBc/Hz
100KHz	-140 dBc/Hz
<b>Aging:</b>	<3ppm 1st/yr, <2ppm every year thereafter

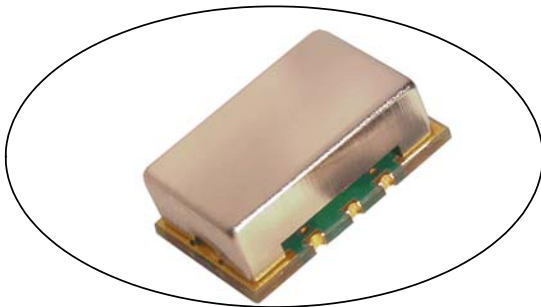

#### Applications:

10 Gigabit Ethernet  
OC48: Forward Error Correction  
Broadband Networks  
SONET/SDH/DWD  
ATM  
Network/switch  
Telecom

Designed using FR5 PCB & HFF crystal technology to provide a Low Noise, Low Jitter Voltage Controlled Crystal Oscillator solution at a competitive price.

Specifications subject to change without notice.

TD-030705 Rev. C

Page 1 of 2



**Crystek Crystals Corporation**

12730 Commonwealth Drive • Fort Myers, FL 33913  
239.561.3311 • 800.237.3061 • FAX: 239.561.1025 • www.crystek.com

**CVPD-940 Model**  
9X14 mm SMD, 3.3V, LVPECL



# Differential LVPECL VCXO

### Crystek Part Number Guide

**CVPD-940 X-155.520**


#1 #2 #3 #4

- #1 Crystek SMD PECL VCXO
- #2 Model 940 = 9x14 High Frequency 3.3V
- #3 Temp. Range: Blank = 0/70°C, X=-40/85°C
- #4 Frequency in MHz: 3 or 6 decimal places




Example:  
CVPD-940X-155.520 = 3.3V, -40/85°C, 155.520 MHz

Standard Frequencies MHz	
74.1758	161.1328
74.250	166.6286
77.7600	167.3317
155.5200	212.5000
156.2500	250.0000


### RECOMMENDED REFLOW SOLDERING PROFILE

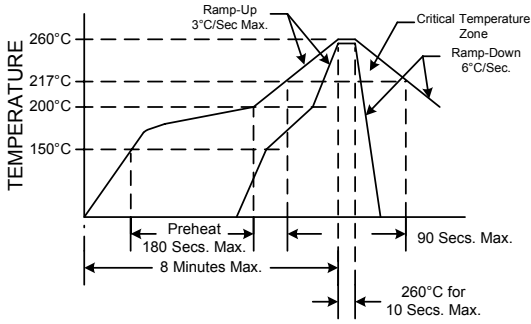

NOTE: Reflow Profile with 240°C peak also acceptable.



### SUGGESTED PAD LAYOUT



Pad	Connection
1	Volt Cont.
2	E/D
3	GND
4	OUT
5	COU
6	Vdd

Enable/Disable Function	
Pin 2	Output Pin
Open	Active
"0" level Vcc-1.620V Max	Active
"1" level Vcc-1.025V Min	Disabled
Disabled State:	
Pin 4 will assume a fixed level of logic "0"	
Pin 5 will assume a fixed level of logic "1"	

### Mechanical:

- Shock:
- Solderability:
- Vibration:
- Solvent Resistance:
- Resistance to Soldering Heat:

- MIL-STD-883, Method 2002, Condition B
- MIL-STD-883, Method 2003
- MIL-STD-883, Method 2007, Condition A
- MIL-STD-202, Method 215
- MIL-STD-202, Method 210, Condition I or J

### Environmental:

- Thermal Shock:
- Moisture Resistance:

- MIL-STD-883, Method 1011, Condition A
- MIL-STD-883, Method 1004

### Packaging:

- Tape/Reel: 100ea, 250ea, 500ea 24mm Tape

Specifications subject to change without notice.

TD-030705 Rev. C  
Page 2 of 2



**Crystek Crystals Corporation**

12730 Commonwealth Drive • Fort Myers, FL 33913  
239.561.3311 • 800.237.3061 • FAX: 239.561.1025 • www.crystek.com