




CRYSTEK
CRYSTALS
A DIVISION OF CRYSTEK CORPORATION

CCSO-914X3-1000
TRUE SINEWAVE
SAW BASED CLOCK OSC
9X14MM SMD
3.3 VOLT



Ultra-Low Phase Noise 1GHz SAW Clock

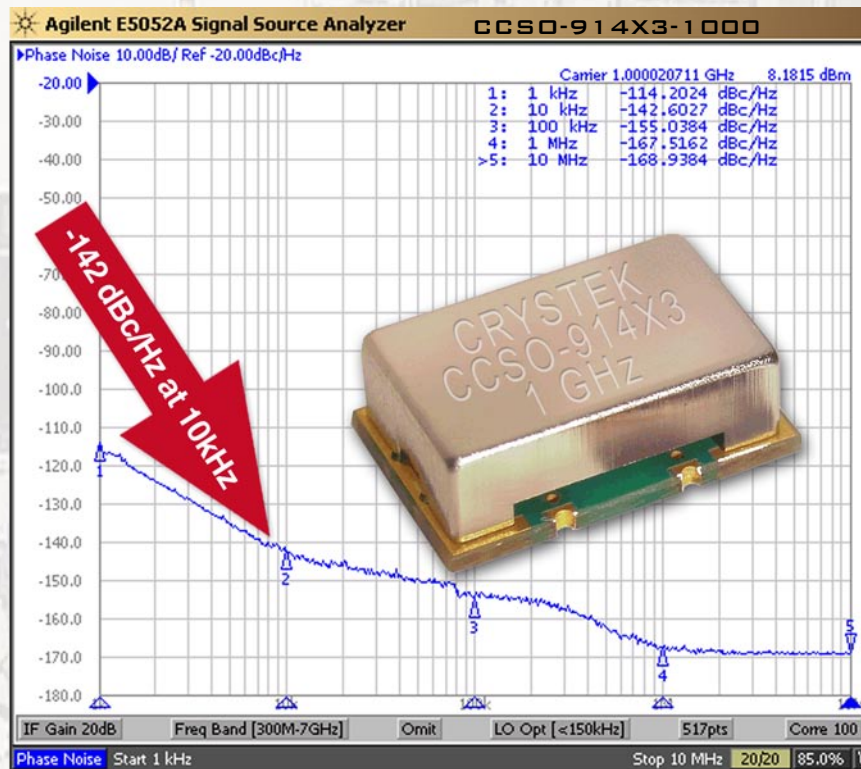

Model CCSO-914X3-1000 is a 1GHz SAW (surface acoustic wave) Clock Oscillator (CCSO). SAW crystal technology provides low-noise and low-jitter performance with true sinewave output. Features include -142dBc/Hz phase noise at 10kHz offset, 3.3V input voltage, -40 to +85C operating temperature, FR5 PCB and 9x14 mm SMT package. The oscillator has no sub-harmonic and the second harmonic is typically -25dBc.

Applications include:

System Clock for Network Clock Generator/Synchronizer, Clock for DDS, Test and Measurement, Avionics, Point-to-Point Radios, and Multi-point Radios.



CRYSTEK

CRYSTALS

A DIVISION OF CRYSTEK CORPORATION

CCSO-914X3-1000
 TRUE SINEWAVE
 SAW BASED CLOCK OSC
 9X14MM SMD
 3.3 VOLT




Frequency : 1 GHz
Temperature Range: -40°C to 85°C
Storage: -45°C to 90°C
Input Voltage: 3.3V ± 0.15V

Freq. vs Temp. ±120ppm Typ.
Input Current: 25mA Typ., 35mA Max
Output: True SineWave
Output Power: +5dBm Min. into 50 Ohm Load
Start-up time: 2ms Typ., 10ms Max
2nd Harmonic: -25dBc Typ., -20dBc Max
Sub-harmonics: None
Modulation BW: >20KHz @ -3dB
Jitter:
 SONET OC-48(12KHz~20MHz) 0.18ps RMS Typ., 0.20ps RMS Max
 SONET OC-192(50KHz~80MHz) 0.12ps RMS Typ., 0.15ps RMS Max

Phase Noise Typical:

1KHz	-112 dBc/Hz
10KHz	-142 dBc/Hz
100KHz	-155 dBc/Hz
1MHz	-167 dBc/Hz
10MHz	-168 dBc/Hz

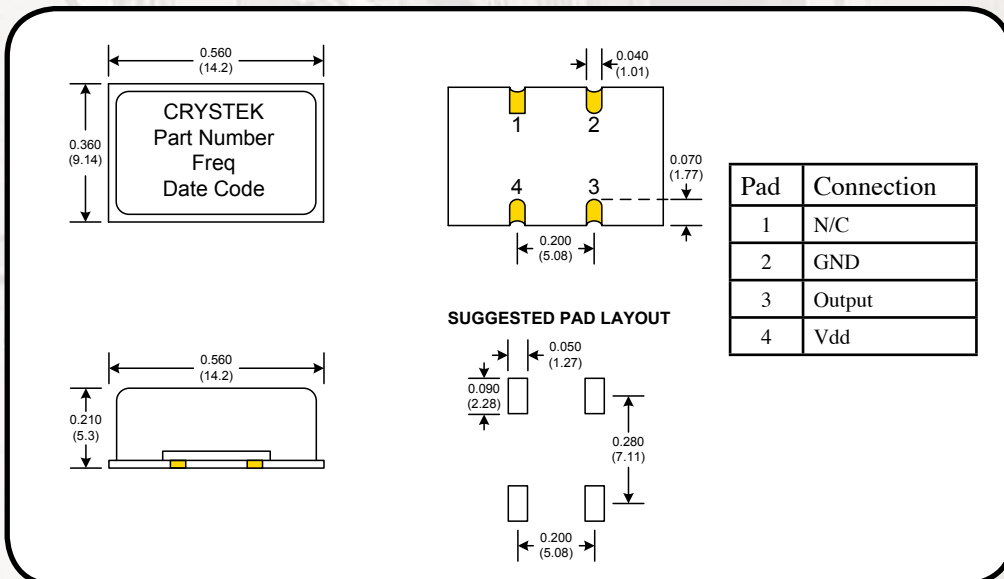

CRYSTEK
 CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913

PHONE: 239-561-3311 • 800-237-3061




FAX: 239-561-1025 • WWW.CRYSTEK.COM

Rev.: A
 Date: 10-23-07



CRYSTEK
CRYSTALS
A DIVISION OF CRYSTEK CORPORATION

CCSO-914X3-1000
TRUE SINEWAVE
SAW BASED CLOCK OSC
9X14MM SMD
3.3 VOLT

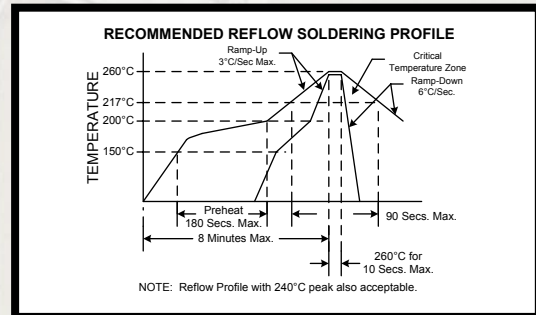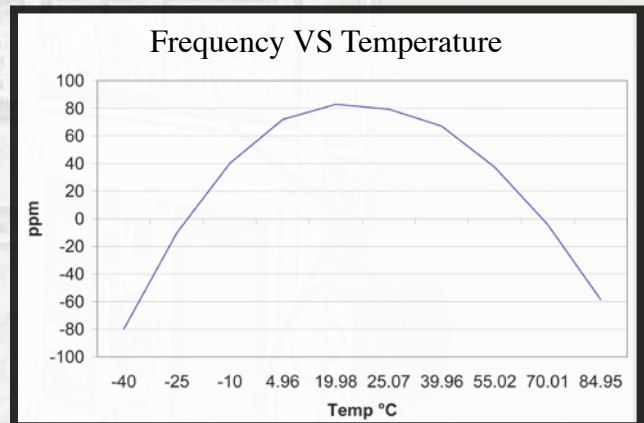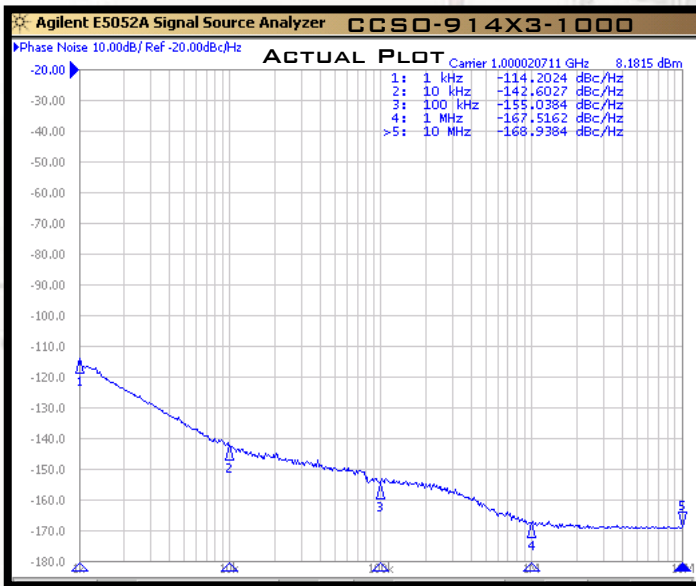

Parameter	Conditions
Mechanical Shock	MIL-STD-883, Method 2002, Condition B
Mechanical Vibration	MIL-STD-883, Method 2007, Condition A
Solderability	MIL-STD-883, Method 2003
Solvent Resistance	MIL-STD-202, Method 215
Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition I or J
Thermal Shock	MIL-STD-883, Method 1011, Condition A
Moisture Resistance	MIL-STD-883, Method 1004



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913

PHONE: 239-561-3311 • 800-237-3061

FAX: 239-561-1025 • WWW.CRYSTEK.COM

Rev.: A
Date: 10-23-07