


Crystek Corporation



WLAN Clock Oscillator



Designed for WLAN


Ultra-Miniature for small layout requirement. Each oscillator is produced using only the best raw materials. NPC IC, Xray sorted quartz blanks and automated clean room production enable Crystek to provide superior quality. Many others may look the same but do not compare.

CCWLAN-2BC-20-22.000 5X3.2 mm SMD, 3.3V, HCMOS


Frequency Range:	22.000MHz
Frequency Stability:	±20ppm Max
Temperature Range:	
Operating:	-20°C to 70°C
Storage:	-55°C to 120°C
Input Voltage:	3.3V ± 0.3V
Input Current:	20mA Max
Standby Current:	10uA Max
Output:	HCMOS
Symmetry:	45/55% Max @ 50% Vdd
Rise/Fall Time:	6ns Max @ 10% to 90% Vdd
Logic:	"0" = 10% Vdd Max "1" = 90% Vdd Min
Load:	15pF Max
Start-Up Time:	10mS Max
Disable Time:	100nS Max
Enable Time:	10mS Max
Aging:	<3ppm 1st/yr, 1ppm every year thereafter

Dimensions inches (mm)


All dimensions are Max unless otherwise specified.

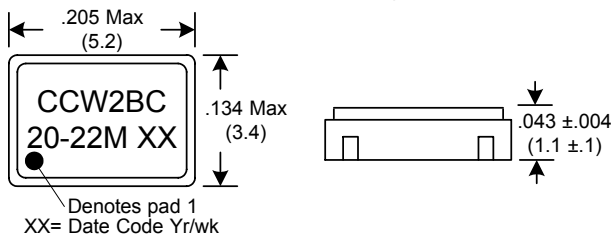


SUGGESTED PAD LAYOUT



0.01uF Bypass Capacitor Recommended

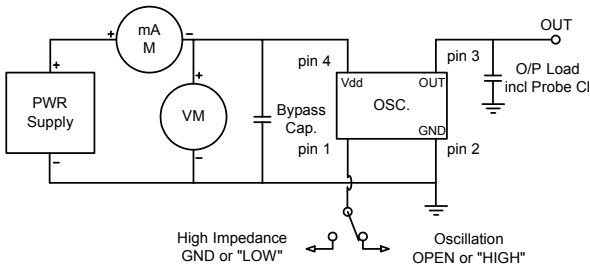

RECOMMENDED REFLOW SOLDERING PROFILE

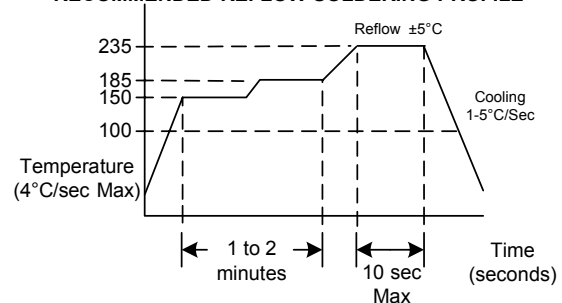

Tri-State Function	
Function pin 1	Output pin
Open	Active
"1" level 2.3V Min	Active
"0" level 0.4V Max	High Z

Available on Tape and Reel in quantities of 1,000 pcs.

Specifications subject to change without notice.

Rev. A

Crystek Crystals Corporation

12730 Commonwealth Drive : Fort Myers, FL 33913 : 239-561-3311 : 800-237-3061 : FAX 239-561-1025 : www.crystek.com