


### Features

- High Current Capability
- Surge Overload Rating to 125A Peak
- High Case Dielectric Strength of 1500V
- Ideal for Printed Circuit Board Application
- UL Listed: Recognized Component Index, File Number E94661

### Mechanical Data

- Case: PBPC-6
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Marked on Body
- Mounting: Through Hole for #6 Screw
- Mounting Torque: 5.0 Inch-pounds Maximum
- Ordering Information: See Last Page
- Marking: Type Number
- Weight: 3.8 grams (approximate)

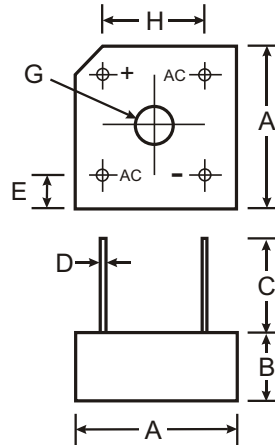

PBPC-6		
Dim	Min	Max
A	14.73	15.75
B	5.84	6.86
C	19.00	
D	1.01	Typical
E	1.70	3.20
G	Hole for #6 screw	
	3.60	4.00
H	10.30	11.30
All Dimensions in mm		

### Maximum Ratings and Electrical Characteristics @ T<sub>A</sub> = 25 C unless otherwise specified

Single phase, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

Characteristic	Symbol	PBPC 601	PBPC 602	PBPC 603	PBPC 604	PBPC 605	PBPC 606	PBPC 607	Unit	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	50	100	200	400	600	800	1000	V	
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	280	420	560	700	V	
Average Rectified Output Current (Note 1) @ T <sub>C</sub> = 50 C (Note 2) @ T <sub>C</sub> = 50 C	$I_o$					6.0 4.0				A
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$					125				A
Forward Voltage (per element) @ I <sub>F</sub> = 3.0A	$V_{FM}$					1.1				V
Peak Reverse Current @ T <sub>C</sub> = 25 C at Rated DC Blocking Voltage (per element) @ T <sub>C</sub> = 100 C	$I_R$					10 1.0				A mA
I <sup>2</sup> t Rating for Fusing (t < 8.3ms) (Note 3)	$I^2t$					64				A <sup>2</sup> s
Typical Total Capacitance (Note 4)	$C_T$					55				pF
Typical Thermal Resistance Junction to Case (per element)	$R_{JC}$					12.5				C/W
Operating and Storage Temperature Range	$T_j, T_{STG}$					-65 to +125			C	

- Notes:
- Mounted on metal chassis.
  - Mounted on PC board FR-4 material.
  - Non-repetitive, for t > 1.0ms and < 8.3ms.
  - Per element, measured at f = 1.0MHz and applied reverse voltage of V<sub>R</sub> = 4.0V DC.

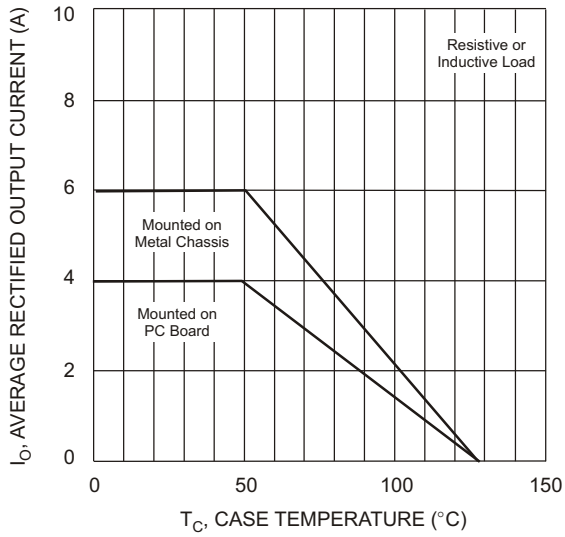


Fig. 1 Forward Current Derating Curve

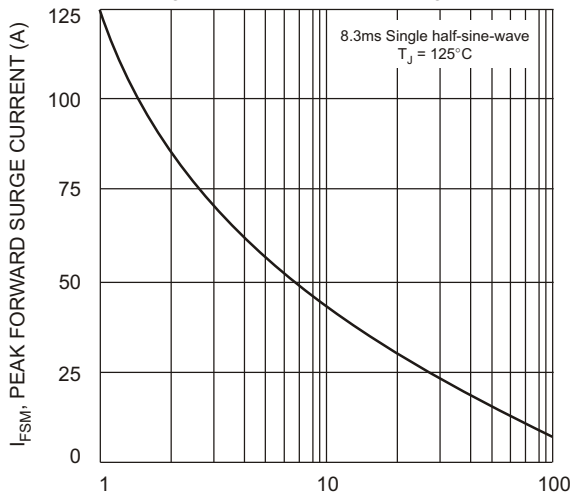


Fig. 3 Peak Forward Surge Current

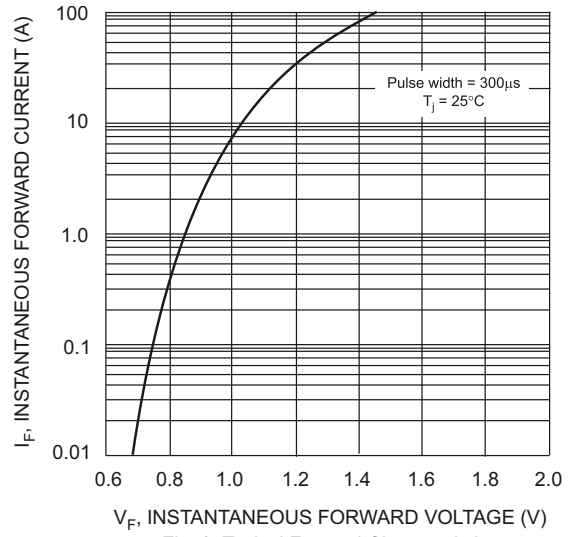


Fig. 2 Typical Forward Characteristics

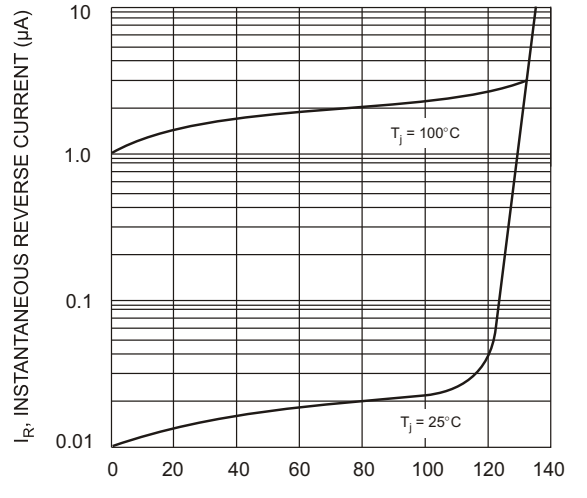


Fig. 4 Typical Reverse Characteristics

**Ordering Information** (Note 5)

Device	Packaging	Shipping
PBPC601	PBPC-6	200/Box
PBPC602	PBPC-6	200/Box
PBPC603	PBPC-6	200/Box
PBPC604	PBPC-6	200/Box
PBPC605	PBPC-6	200/Box
PBPC606	PBPC-6	200/Box
PBPC607	PBPC-6	200/Box

Notes: 5. For packaging details, visit our website at <http://www.diodes.com/datasheets/ap02008.pdf>.

**IMPORTANT NOTICE**

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

**LIFE SUPPORT**

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.