



Micro Commercial Components™

Micro Commercial Components  
20736 Marilla Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

# SMAJ5918B THRU SMAJ5942B

## Features


- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)
  - Low Zener Impedance
  - Low Regulation Factor
  - $V_z$  - tolerance:  $\pm 5\%$
  - For Surface Mount Applications
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL rating 1

## 1.5 Watt Zener Diode 5.1 to 51 Volts

## Maximum Ratings


- Junction Temperature: 150°C
- Storage Temperature: -65°C to +175°C
- 1.5 Watt DC Power Dissipation ( $T_L \leq 75^\circ\text{C}$ )
- Thermal Resistance Junction to Lead: 50°C/W
- Forward Voltage @ 200mA: 1.5 Volts

### DO-214AC (SMAJ)(LEAD FRAME)

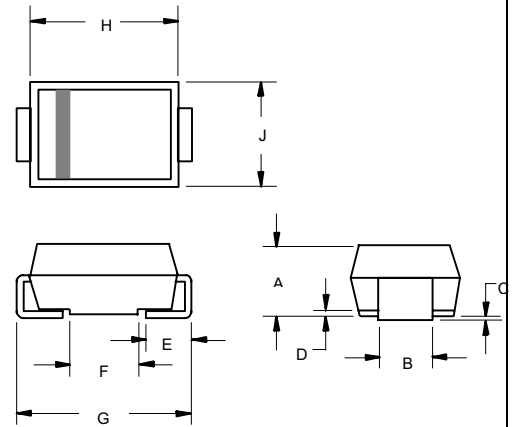

| DIM | DIMENSIONS |      |      |      | NOTE |
|-----|------------|------|------|------|------|
|     | INCHES     |      | MM   |      |      |
| A   | .079       | .096 | 2.00 | 2.44 |      |
| B   | .050       | .064 | 1.27 | 1.63 |      |
| C   | .002       | .008 | .05  | .20  |      |
| D   | ---        | .02  | ---  | .51  |      |
| E   | .030       | .060 | .76  | 1.52 |      |
| F   | .065       | .091 | 1.65 | 2.32 |      |
| G   | .189       | .220 | 4.80 | 5.59 |      |
| H   | .157       | .181 | 4.00 | 4.60 |      |
| J   | .090       | .115 | 2.25 | 2.92 |      |

#### SUGGESTED SOLDER PAD LAYOUT

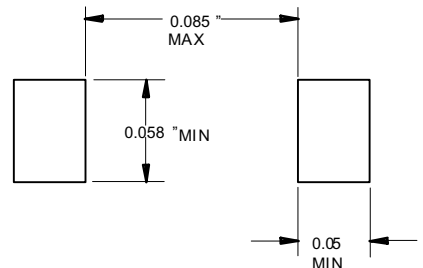

Note: 1. High Temperature Solder Exemptions Applied, see EU Directive Annex 7.

**ELECTRICAL CHARACTERISTICS @25°C**

| MCC<br>PART<br>NUMBER | ZENER<br>VOLTAGE<br>$V_Z$ (1) | TEST<br>CURRENT<br>$I_{ZT}$ | MAXIMUM<br>DYNAMIC<br>IMPEDANCE<br>$Z_{ZT}$ @ $I_{ZT}$ | KNEE<br>CURRENT<br>$I_{ZK}$ | KNEE<br>IMPEDANCE<br>$Z_{ZK}$ | MAXIMUM<br>REVERSE<br>CURRENT<br>$I_R$ | REVERSE<br>VOLTAGE<br>$V_R$ | DEVICE<br>MARKING |
|-----------------------|-------------------------------|-----------------------------|--|-----------------------------|-------------------------------|--|-----------------------------|-------------------|
|                       | VOLTS                         | mA                          | OHMS   | mA                          | OHMS                          | $\mu$ A                                | VOLTS                       |                   |
| SMAJ5918B             | 5.1                           | 73.5                        | 4.0  | 1.0                         | 350                           | 2.5                                    | 2.0                         | 18B               |
| SMAJ5919B             | 5.6                           | 66.9                        | 2.0  | 1.0                         | 250                           | 2.5                                    | 3.0                         | 19B               |
| SMAJ5920B             | 6.2                           | 60.5                        | 2.0  | 1.0                         | 200                           | 2.5                                    | 4.0                         | 20B               |
| SMAJ5921B             | 6.8                           | 55.1                        | 2.5  | 1.0                         | 200                           | 2.5                                    | 5.2                         | 21B               |
| SMAJ5922B             | 7.5                           | 50.0                        | 3.0  | 0.5                         | 400                           | 2.5                                    | 6.0                         | 22B               |
| SMAJ5923B             | 8.2                           | 45.7                        | 3.5  | 0.5                         | 400                           | 2.5                                    | 6.5                         | 23B               |
| SMAJ5924B             | 9.1                           | 41.2                        | 4.0  | 0.5                         | 500                           | 2.5                                    | 7.0                         | 24B               |
| SMAJ5925B             | 10                            | 37.5                        | 4.5  | 0.25                        | 500                           | 0.5                                    | 8.0                         | 25B               |
| SMAJ5926B             | 11                            | 34.1                        | 5.5  | 0.25                        | 550                           | 0.5                                    | 8.4                         | 26B               |
| SMAJ5927B             | 12                            | 31.2                        | 6.5  | 0.25                        | 550                           | 0.5                                    | 9.1                         | 27B               |
| SMAJ5928B             | 13                            | 28.8                        | 7.0  | 0.25                        | 550                           | 0.5                                    | 9.9                         | 28B               |
| SMAJ5929B             | 15                            | 25.0                        | 9.0  | 0.25                        | 600                           | 0.5                                    | 11.4                        | 29B               |
| SMAJ5930B             | 16                            | 23.4                        | 10.0   | 0.25                        | 600                           | 0.5                                    | 12.2                        | 30B               |
| SMAJ5931B             | 18                            | 20.8                        | 12.0   | 0.25                        | 650                           | 0.5                                    | 13.7                        | 31B               |
| SMAJ5932B             | 20                            | 18.7                        | 14.0   | 0.25                        | 650                           | 0.5                                    | 15.2                        | 31B               |
| SMAJ5933B             | 22                            | 17.0                        | 17.5   | 0.25                        | 650                           | 0.5                                    | 16.7                        | 33B               |
| SMAJ5934B             | 24                            | 15.6                        | 19.0   | 0.25                        | 700                           | 0.5                                    | 18.2                        | 34B               |
| SMAJ5935B             | 27                            | 13.9                        | 23.0   | 0.25                        | 700                           | 0.5                                    | 20.6                        | 35B               |
| SMAJ5936B             | 30                            | 12.5                        | 28.0   | 0.25                        | 750                           | 0.5                                    | 22.8                        | 36B               |
| SMAJ5937B             | 33                            | 11.4                        | 33.0   | 0.25                        | 800                           | 0.5                                    | 25.1                        | 37B               |
| SMAJ5938B             | 36                            | 10.4                        | 38.0   | 0.25                        | 850                           | 0.5                                    | 27.4                        | 38B               |
| SMAJ5939B             | 39                            | 9.6                         | 45.0   | 0.25                        | 900                           | 0.5                                    | 29.7                        | 39B               |
| SMAJ5940B             | 43                            | 8.7                         | 53.0   | 0.25                        | 950                           | 0.5                                    | 32.7                        | 40B               |
| SMAJ5941B             | 47                            | 8.0                         | 67.0   | 0.25                        | 1000                          | 0.5                                    | 35.8                        | 41B               |
| SMAJ5942B             | 51                            | 7.3                         | 70.0   | 0.25                        | 1100                          | 0.5                                    | 38.8                        | 42B               |

1) Based on DC-measurement at thermal equilibrium while maintaining the lead temperature( $T_L$ ) at 30°C, 9.5mm(3/8") from the diode body.

**Characteristics** ( $T_j=25^{\circ}\text{C}$  unless otherwise specified)

| Symbol   | Parameter                          |
|----------|------------------------------------|
| $V_Z$    | Reverse zener voltage @ $I_{ZT}$   |
| $I_{ZT}$ | Reverse current                    |
| $Z_{ZT}$ | Maximum zener impedance @ $I_{ZT}$ |
| $I_{ZK}$ | Reverse current                    |
| $Z_{ZK}$ | Maximum zener impedance @ $I_{ZK}$ |
| $I_R$    | Reverse leakage current @ $V_R$    |
| $V_R$    | Breakdown voltage                  |
| $I_F$    | Forward current                    |
| $V_F$    | Forward voltage @ $I_F$            |

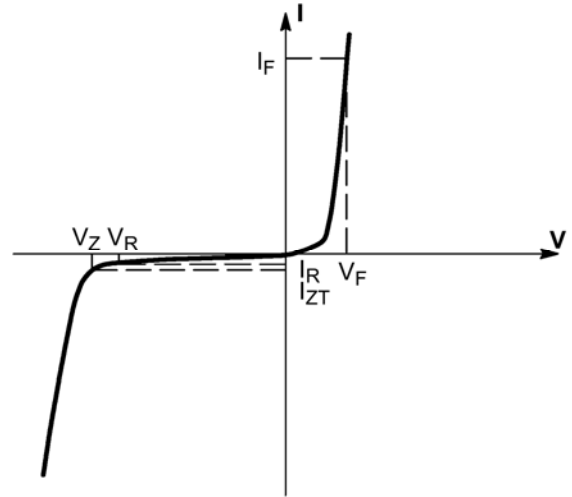


Figure 1. Zener voltage regulator

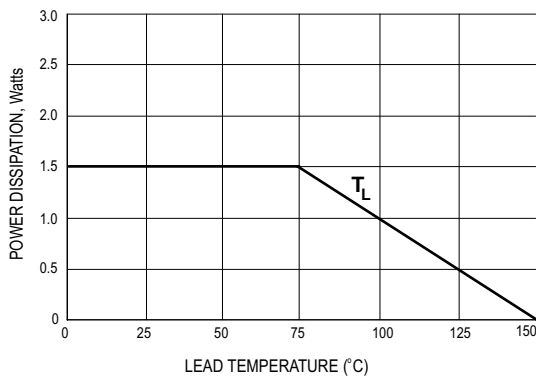


Figure 2. Steady state power derating

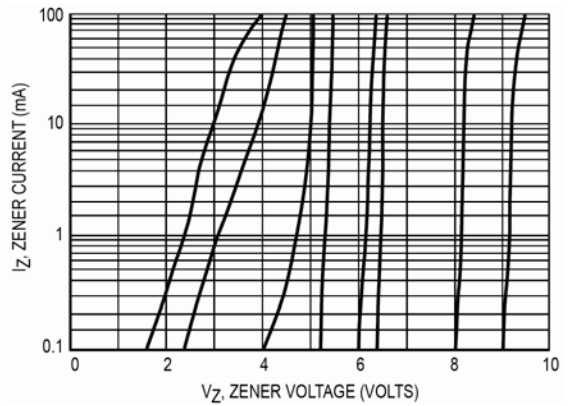


Figure 3.  $V_Z$  - 3.3 thru 10 volts

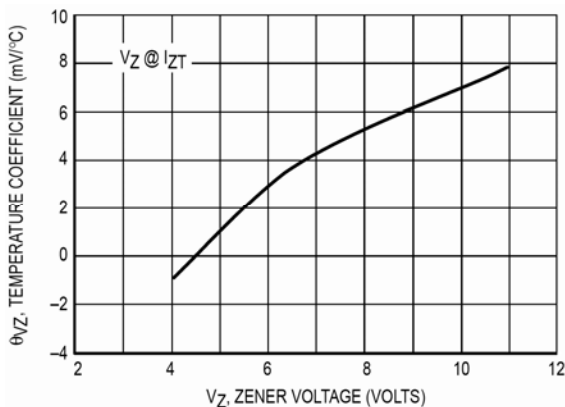


Figure 4. Zener voltage - 3.3 to 12 volts

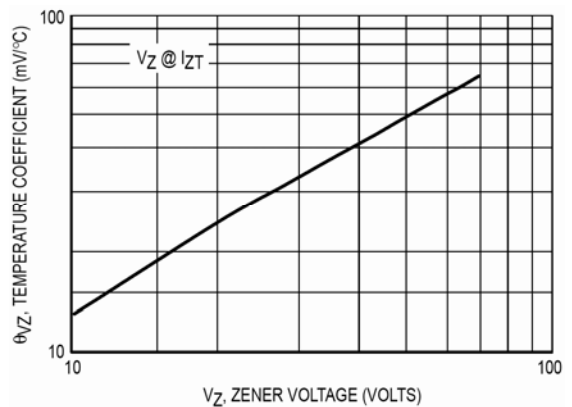


Figure 5. Zener voltage - 14 to 43 volts

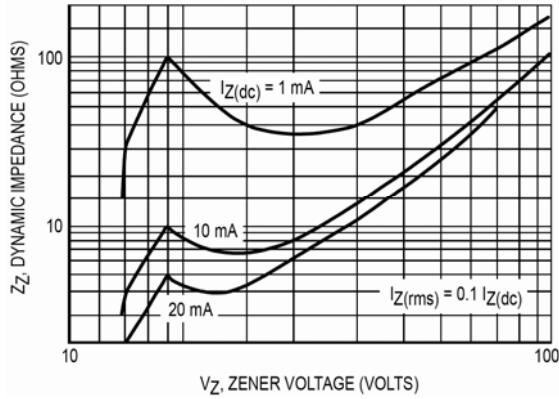


Figure 6. Effect of zener voltage

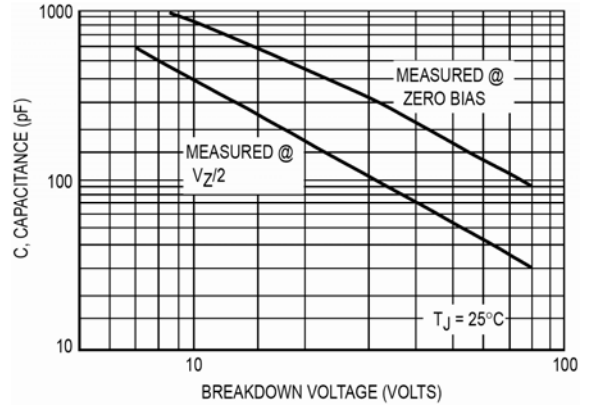


Figure 7. Capacitance curve

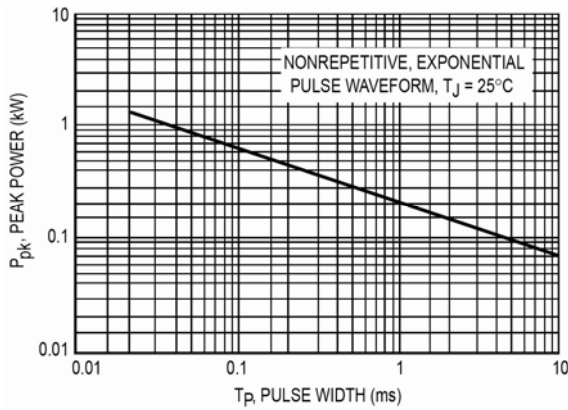


Figure 8. Typical pulse rating curve

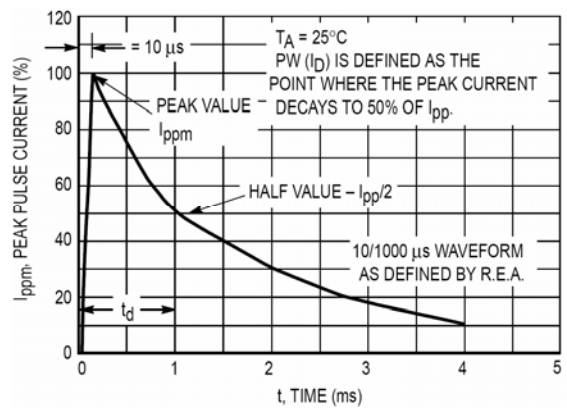


Figure 9. Pulse waveform

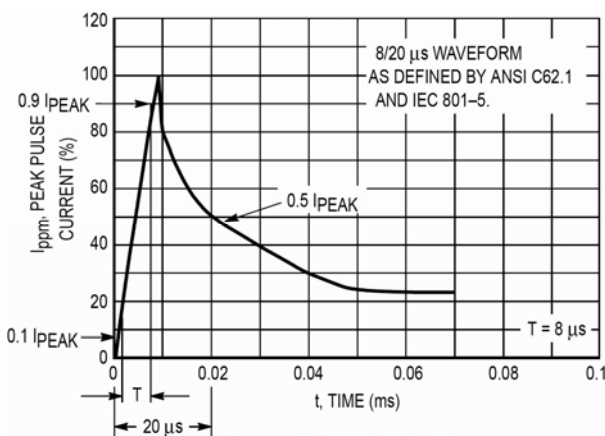


Figure 10. Pulse waveform



Micro Commercial Components <sup>TM</sup>

## Ordering Information

|                  |                        |
|------------------|------------------------|
| Device           | Packing                |
| (Part Number)-TP | Tape&Reel;7.5Kpcs/Reel |

**\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*APPLICATIONS DISCLAIMER\*\*\***

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.