

Micro Commercial Components

Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311 Phone: (818) 701-4933 Fax: (818) 701-4939

Features

- Power dissipation: 200mW (T_{amb}=25°C)
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- For Surface Mount Application


Marking KJA

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C

Electrical Characteristics @ 25°C Unless Otherwise Specified

Reverse Voltage	V _R	75V	I _R =100 μ A
Peak Forward Current	١ _F	150mA	
Maximum Instantaneous Forward Voltage	V _F	0.715V 0.855 1.0V 1.25V	$I_{FM} = 1mA;$ $I_{FM} = 10mA;$ $I_{FM} = 50mA;$ $I_{FM} = 150mA;$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I _R	2.5μΑ	V _R =75Volts
Diode Capacitance	CD	2pF	Measured at 1.0MHz, $V_R=0V$
Reverse Recovery Time	T _{rr}	4ns	$I_F=I_R=10mA$ Irr=0.1 I_R $R_L=100 \Omega$

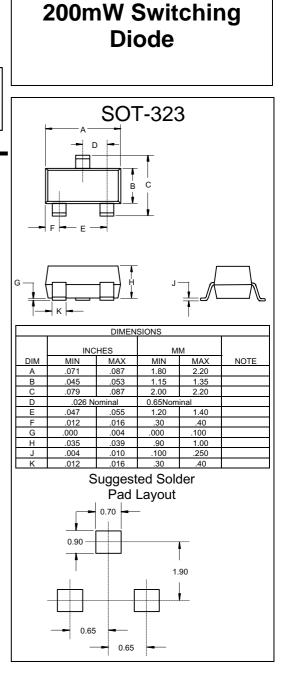

BAV70WT

www.mccsemi.com

2008/01/01



Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Micro Commercial Components Corp. and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by Micro Commercial Components Corp. are not intended for use in Medical,

Aerospace or Military Applications.

