# Switching diode

# **DAN202K**

#### Applications

Ultra high speed switching


#### ● Features

- 1) Small mold type. (SMD3)
- 2) High reliability


#### Construction


Silicon epitaxial planar

# ●Dimensions (Unit:mm)




## ●Land size figure (Unit : mm)





## ● Taping specifications (Unit: mm)

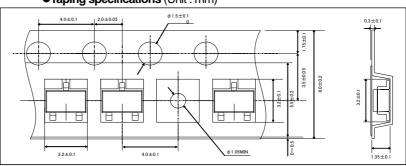

# ● Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Reverse voltage (repatitive peak)	$V_{RM}$	80	V
Reverse voltage (DC)	$V_R$	80	V
Forward current (Single)	I <sub>FM</sub>	300	mA
Forward current (Double)	I <sub>FM</sub>	450	mA
Average rectified forward current (Single)	lo	100	mA
Average rectified forward current (double)	lo	150	mA
Surge current (t=1us) (Single)	I <sub>surge</sub>	4	Α
Surge current (t=1us) (Double)	I <sub>surge</sub>	6	Α
Power dissipation	Pd	200	mW
Junction temperature	Tj	150	°C
Storage temperature	Tstg	-55 to +150	°C

## ●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Forward voltage	$V_{F}$	-	-	1.2	V	I <sub>F</sub> =100mA
Reverse current	I <sub>R</sub>	-	-	0.1	μA	V <sub>R</sub> =70V
Capacitance between terminals	Ct	-	-	3.5	pF	V <sub>R</sub> =6V , f=1MHz
Reverse recovery time	trr	-	-	4	ns	$V_R$ =6V , IF=5mA , RL=50 $\Omega$



#### ●Electrical characteristic curves (Ta=25°C) Ta=150°C 10 10000 FORWARD CURRENT:IF(mA) REVERSE CURRENT:IR(nA) CAPACITANCE BETWEEN TERMINALS:Ct(pF) 10 0.1 0.1 0.01 0 30 40 50 60 70 5 10 15 REVERSE VOLTAGE:VR(V) VR-Ct CHARACTERISTICS 0 FORWARD VOLTAGE:VF(mV) VF-IF CHARACTERISTICS REVERSE VOLTAGE: VR(V) VR-IR CHARACTERISTICS Ta=25°C VR=80V Ta=25°C 90 VR=6V IF=100m/ FORWARD VOLTAGE:VF(mV) 940 80 REVERSE CURRENT:IR(nA) n=30pcs 70 930 5 50 920 30 3 910 20 2 AVE:921.7m 10 900 VF DISPERSION MAP IR DISPERSION MAP Ct DISPERSION MAP Ta=25°C VR=6V IF=5mA RESERVE RECOVERY TIME:trr(ns) PEAK SURGE FORWARD CURRENT:IFSM(A) PEAK SURGE FORWARD CURRENT:IFSM(A) RL=50 Ω 7 10 3 \_ AVE:3.50A AVE:1.93ns 0 NUMBER OF CYCLES IFSM DISPERSION MAP trr DISPERSION MAP TRANSIENT THAERMAL IMPEDANCE:Rth (°C/W) FORWARD CURRENT:FSM(A) ELECTROSTATIC DISCHARGE TEST ESD(KV) 100 Rth(j-c) AVE:0.97kV 1 TIME:t(ms) 10 IFSM-t CHARACTERISTICS 0.1 1 TIME:t(ms) 0.001 0.01 Rth-t CHARACTERISTICS ESD DISPERSION MAP

#### Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any
  means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
  product described in this document are for reference only. Upon actual use, therefore, please request
  that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard
  use and operation. Please pay careful attention to the peripheral conditions when designing circuits
  and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
  otherwise dispose of the same, no express or implied right or license to practice or commercially
  exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact your nearest sales office.

**ROHM** Customer Support System

THE AMERICAS / EUPOPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp

Copyright © 2007 ROHM CO.,LTD.

ROHM CO., LTD. 21, Saiin Mizosaki-cho, Ukyo-ku, Kyoto 615-8585, Japan

pan TEL:+81-75-311-2121 FAX:+81-75-315-0172

