


Fast Recovery Epitaxial Diode (FRED)


DSEI 2x 101

$V_{RRM} = 1200\text{ V}$
 $I_{FAVM} = 2 \times 91\text{ A}$
 $t_{rr} = 40\text{ ns}$

| V_{RSM} | V_{RRM} | Type |
|-----------|-----------|-----------------|
| V | V | |
| 1200 | 1200 | DSEI 2x 101-12A |



miniBLOC, SOT-227 B
 E72873




| Symbol | Test Conditions | Maximum Ratings (per diode) | |
|------------------|---|-----------------------------|------------------|
| $I_{F(RMS)}$ | $T_{VJ} = T_{VJM}$ | 130 | A |
| $I_{F(AVM)}^{①}$ | $T_C = 50^\circ\text{C}$; rectangular, $d = 0.5$ | 91 | A |
| I_{FRM} | $t_p < 10\ \mu\text{s}$; rep. rating, pulse width limited by T_{VJM} | TBD | A |
| I_{FSM} | $T_{VJ} = 45^\circ\text{C}$; $t = 10\text{ ms}$ (50 Hz), sine | 900 | A |
| | $t = 8.3\text{ ms}$ (60 Hz), sine | 970 | A |
| | $T_{VJ} = 150^\circ\text{C}$; $t = 10\text{ ms}$ (50 Hz), sine | 810 | A |
| | $t = 8.3\text{ ms}$ (60 Hz), sine | 870 | A |
| I^2t | $T_{VJ} = 45^\circ\text{C}$; $t = 10\text{ ms}$ (50 Hz), sine | 4100 | A ² s |
| | $t = 8.3\text{ ms}$ (60 Hz), sine | 4000 | A ² s |
| | $T_{VJ} = 150^\circ\text{C}$; $t = 10\text{ ms}$ (50 Hz), sine | 3300 | A ² s |
| | $t = 8.3\text{ ms}$ (60 Hz), sine | 3200 | A ² s |
| T_{VJ} | | -40...+150 | °C |
| T_{VJM} | | 150 | °C |
| T_{stg} | | -40...+150 | °C |
| P_{tot} | $T_C = 25^\circ\text{C}$ | 250 | W |
| V_{ISOL} | 50/60 Hz, RMS $I_{ISOL} \leq 1\text{ mA}$ | 2500 | V~ |
| M_d | Mounting torque | 1.5/13 | Nm/lb.in. |
| | Terminal connection torque (M4) | 1.5/13 | Nm/lb.in. |
| Weight | | 30 | g |

Features

- International standard package
- miniBLOC (ISOTOP compatible)
- Isolation voltage 2500 V~
- matched diodes f. parallel operation
- Planar passivated chips
- two independent diodes
- Very short recovery time
- Extremely low switching losses
- Low I_{RM} -values
- Soft recovery behaviour

miniBLOC, SOT-227 B

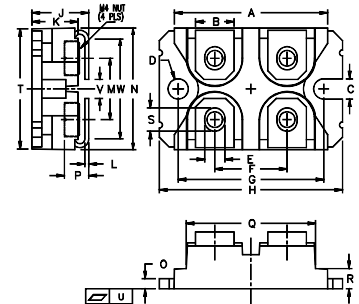

M4 screws (4x) supplied

| Dim. | Millimeter | | Inches | |
|------|------------|-------|--------|-------|
| | Min. | Max. | Min. | Max. |
| A | 31.50 | 31.88 | 1.240 | 1.255 |
| B | 7.80 | 8.20 | 0.307 | 0.323 |
| C | 4.09 | 4.29 | 0.161 | 0.169 |
| D | 4.09 | 4.29 | 0.161 | 0.169 |
| E | 4.09 | 4.29 | 0.161 | 0.169 |
| F | 14.91 | 15.11 | 0.587 | 0.595 |
| G | 30.12 | 30.30 | 1.186 | 1.193 |
| H | 37.80 | 38.20 | 1.489 | 1.505 |
| J | 11.68 | 12.22 | 0.460 | 0.481 |
| K | 8.92 | 9.60 | 0.351 | 0.378 |
| L | 0.76 | 0.84 | 0.030 | 0.033 |
| M | 12.60 | 12.85 | 0.496 | 0.506 |
| N | 25.15 | 25.42 | 0.990 | 1.001 |
| O | 1.98 | 2.13 | 0.078 | 0.084 |
| P | 4.95 | 5.97 | 0.195 | 0.235 |
| Q | 26.54 | 26.90 | 1.045 | 1.059 |
| R | 3.94 | 4.42 | 0.155 | 0.174 |
| S | 4.72 | 4.85 | 0.186 | 0.191 |
| T | 24.59 | 25.07 | 0.968 | 0.987 |
| U | -0.05 | 0.1 | -0.002 | 0.004 |
| V | 3.30 | 4.57 | 0.130 | 0.180 |
| W | 0.780 | 0.830 | 0.031 | 0.033 |

① I_{FAVM} rating includes reverse blocking losses at T_{VJM} , $V_R = 0.8 V_{RRM}$, duty cycle $d = 0.5$

Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions

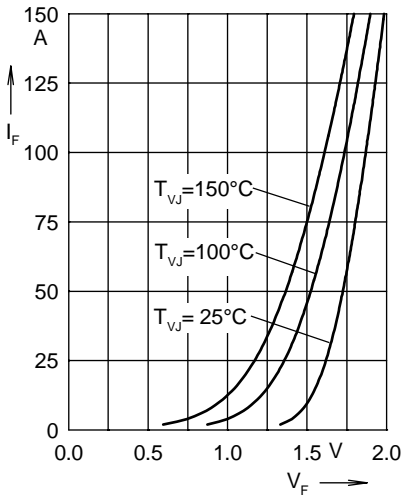


Fig. 1 Forward current I_F versus V_F

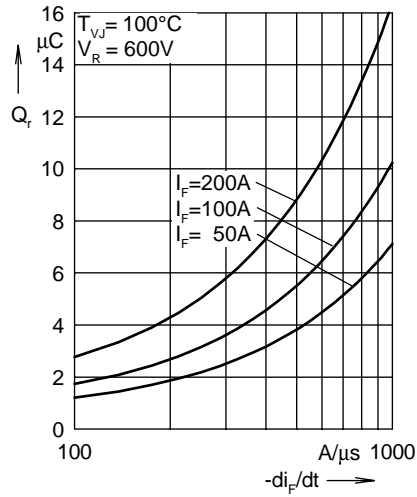


Fig. 2 Reverse recovery charge Q_r versus $-di_F/dt$

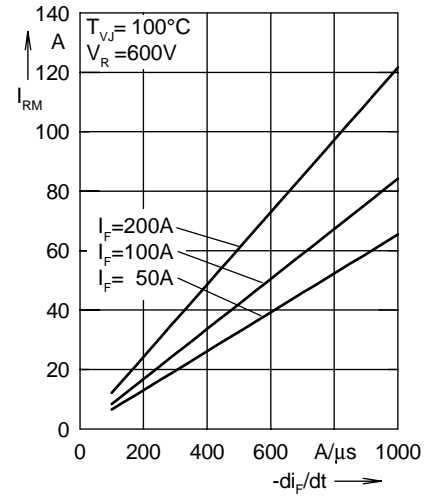


Fig. 3 Peak reverse current I_{RM} versus $-di_F/dt$

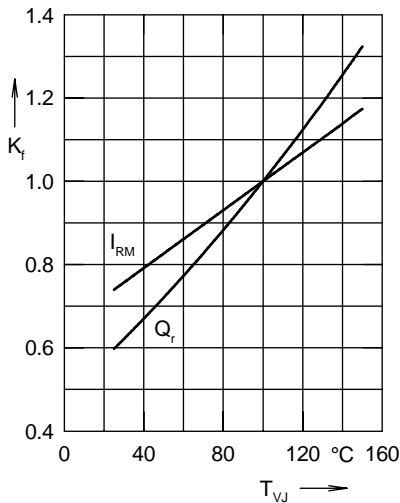


Fig. 4 Dynamic parameters Q_r , I_{RM} versus T_{VJ}

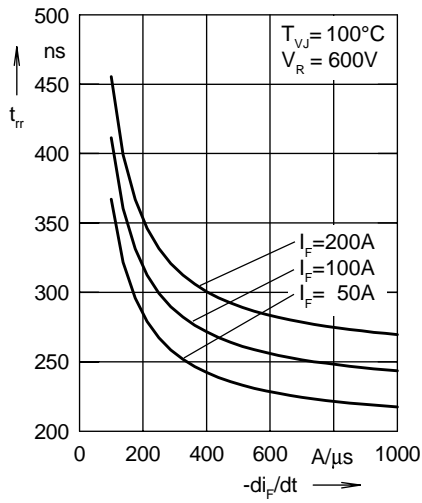


Fig. 5 Recovery time t_{rr} versus $-di_F/dt$

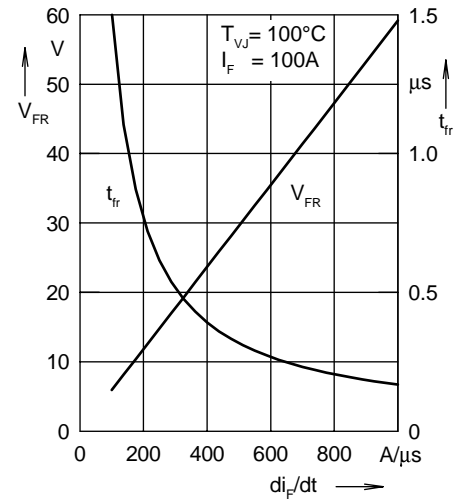


Fig. 6 Peak forward voltage V_{FR} and t_{fr} versus di_F/dt

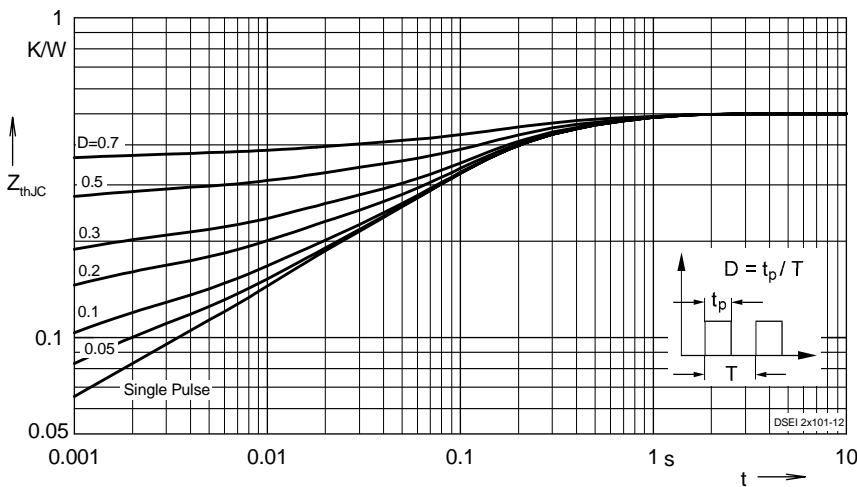


Fig. 7 Transient thermal impedance junction to case at various duty cycles

Constants for Z_{thJC} calculation:

| i | R_{thi} (K/W) | t_i (s) |
|---|-----------------|-----------|
| 1 | 0.02 | 0.00002 |
| 2 | 0.05 | 0.00081 |
| 3 | 0.076 | 0.01 |
| 4 | 0.24 | 0.94 |
| 5 | 0.114 | 0.45 |