



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

DL4151

500mA Small Signal Diode 75 Volts

Features

- Fast Switching Speed and Low Forward Voltage Drop
- High Reverse Breakdown Voltage and High Conductance
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates Compliant. See ordering information)

Mechanical Data

- Case: MiniMELF, Glass
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: Indicated by Cathode Band
- Weight: 0.05 grams (approx.)

Maximum Ratings @ 25°C Unless Otherwise Specified


Parameter	Symbol	DL4151	Unit
Repetitive peak reverse voltage	V_{RRM}	75	V
RMS reverse voltage	$V_{R(RMS)}$	50	V
Peak forward surge current ($t_p=1\mu s$)	I_{FSM}	2	A
Repetitive peak forward current	I_{FM}	500	mA
Continuous forward current	I_F	300	mA
Average forward current	$I_{F(AV)}$	150	mA
Power dissipation	P_D	500	mW
Junction temperature	T_j	175	°C
Storage temperature range	T_{stg}	-65 to +175	°C

Electrical Characteristics @ 25°C Unless Otherwise Specified

Parameter	Symbol	Min	Max	Unit	Test Conditions
Forward Voltage	V_F	1	V	$I_F=50mA$
Reverse Current	I_R	50	nA	$V_R=50V, T_j=25^\circ C$
		50	uA	$V_R=50V, T_j=125^\circ C$
Breakdown Voltage	$V_{(BR)}$	75	V	$I_R=5\mu A$
Junction Capacitance	C_j	2	pF	$V_R=0, f=1.0MHz$
Reverse recovery time	t_{rr}	2	ns	$I_F=10mA, V_R=6V, I_R=1mA, R_L=100\Omega$


Note:1.Lead in Glass Exemption Applied, see EU Directive Annex 5.

MINIMELF

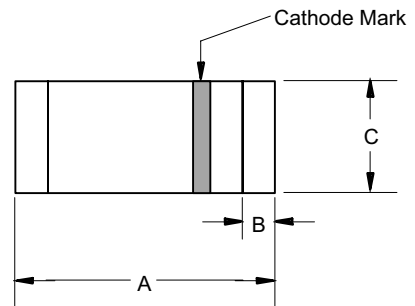


DIM	DIMENSION				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.134	.142	3.40	3.60	
B	.008	.016	0.20	0.40	
C	.055	.059	1.40	1.50	

SUGGESTED SOLDER PAD LAYOUT

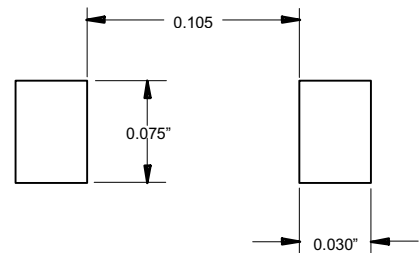


DL4151

Figure 1
Typical Forward Characteristics

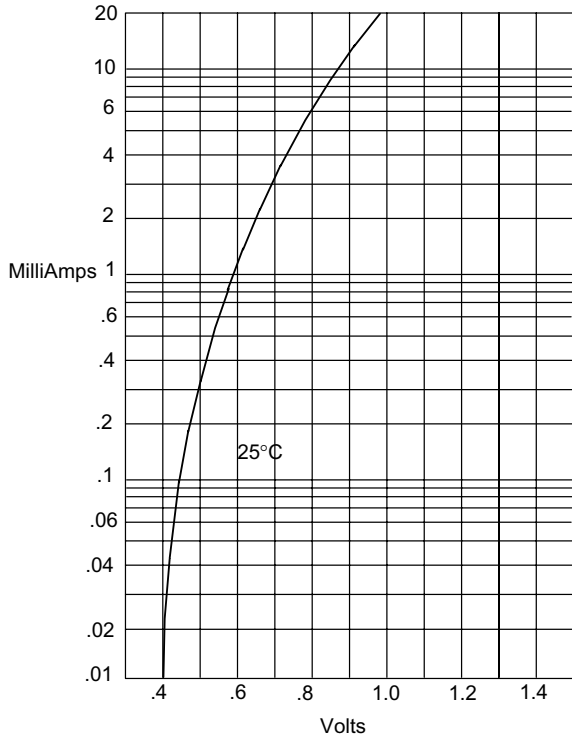


Instantaneous Forward Current - Amperes *versus*
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

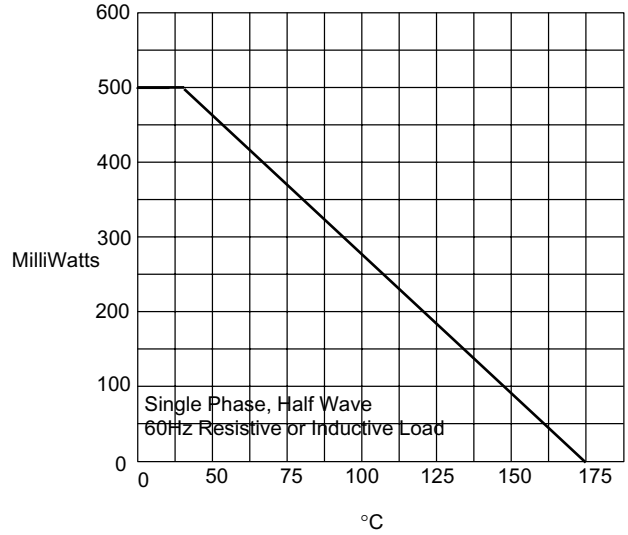

Admissible Power Dissipation - MilliWatts *versus*
Ambient Temperature - °C


Figure 3
Junction Capacitance

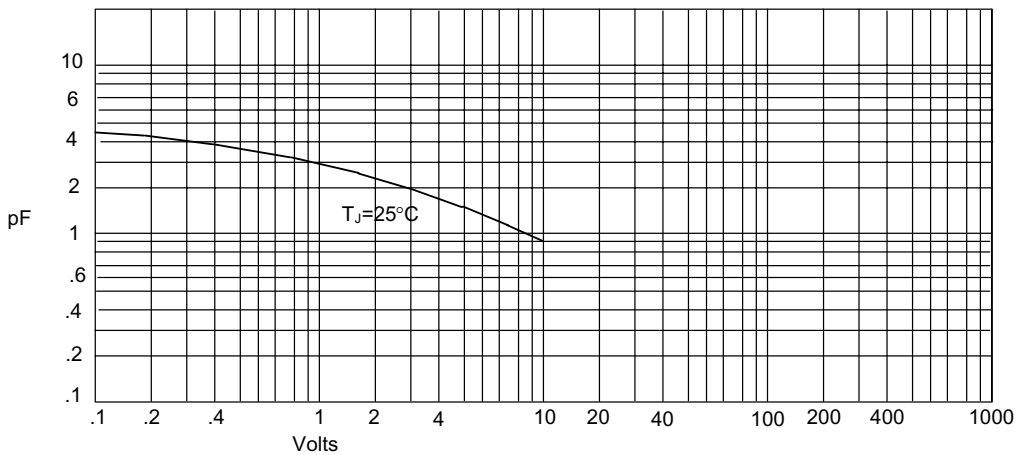

Junction Capacitance - pF *versus*
Reverse Voltage - Volts


DL4151

Figure 4
Typical Reverse Characteristics

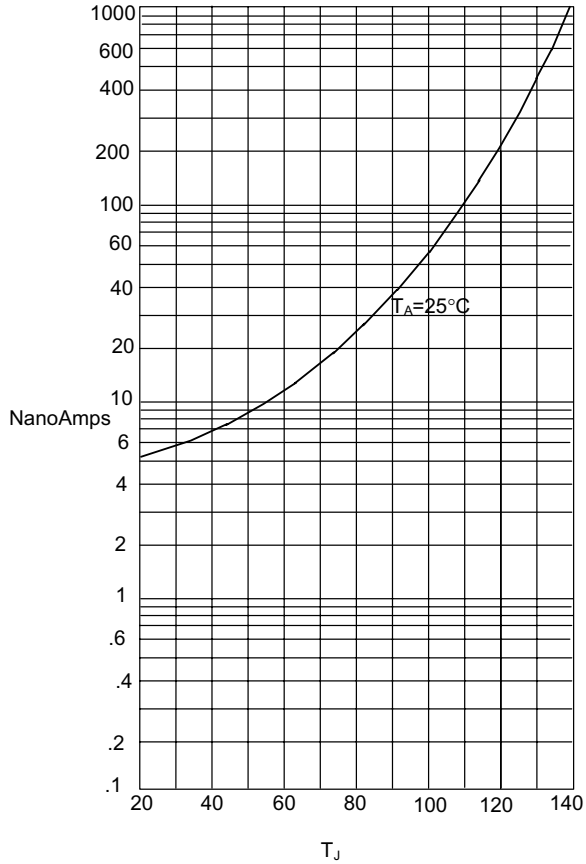

Instantaneous Reverse Leakage Current - NanoAmperes versus Junction Temperature - °C

Figure 5
Peak Forward Surge Current

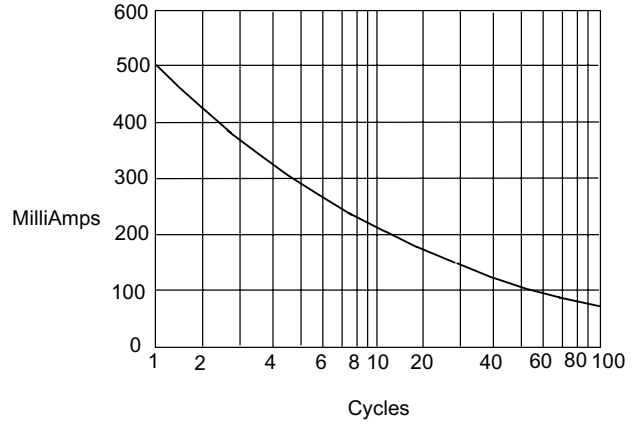

Peak Forward Surge Current - Amperes versus Number Of Cycles At 60Hz - Cycles



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;2.5Kpcs/Reel

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.